

The **DEETER** Group®

RPS-2300 Ultrasonic Sensor Controller with Remote Sensing Head



Features

-
- Various Sensing Ranges
- Narrow Sensing Beam
- High Frequency
- 2-Way Power Operation
- Sealed Remote Transducer
- Adjustable Delay Controls
- 2 Independent Range Adjustments
- LED Indicators
- Isolated Form C Relay Outputs
- Small Electronic Controller

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW

Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk



www.deeter.co.uk

The **DEETER** Group®

RPS-2300 Ultrasonic Sensor Controller with Remote Sensing Head

The RPS-2300 is a single transducer device with 2 independent range control adjustments, LED indicators, and form C relay outputs. These make the sensor well suited for high and low level control, or other applications where two set points are needed. The transducer head is constructed of galvanized steel for the 14" and 36" sensor and plastic for the 72". A sealed silicon rubber sensing face is used making this sensor best suited for environments where dirt is a problem. This sensor also has a unique master and slave feature which enables many of the same units to be used within close proximity of one another without cross-talk interference. For example, if three sensors are needed in a close area, one sensor would be left as a master and the other two would be slaves. This is done by means of the X IN, X OUT, and GND connection on the board. One sensor (master) would send a signal by means of the X OUT and GND terminals. These would be connected to the X IN and GND terminals of the other two sensors (slaves). With the sensors connected in this way, all units would be transmitting and receiving at the same time. This then would prevent cross-talk and enable all three sensors to be used at the same time in close proximity of one another. There are also separate turn ON and turn OFF DELAY potentiometers provided for each set point. All four DELAY controls are located along side the black module inside the enclosure box. The remote transducer allows for mounting of the sensor head in cramped spaces while the controller is out of the way. The (2) independent and isolated form C relays furnish N.O. and N.C. outputs. This sensor has a narrow sensing beam and operates at a frequency of 222kHz for the 14" and 36" ranges and 150kHz for the 72" range. Sensing ranges available for the RPS-2300 include 4" to 14", 5" to 36" and 8" to 72". Mounting flanges, LED indicators, ranging potentiometers, and 6-ft. transducer cable are included. Optional cable lengths are available.

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW



Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk



www.deeter.co.uk

The **DEETER** Group®

RPS-2300 Ultrasonic Sensor Controller with Remote Sensing Head

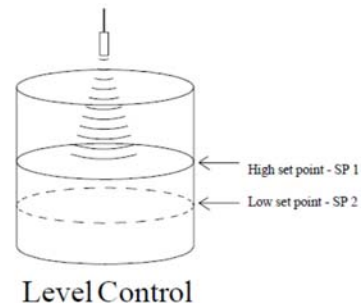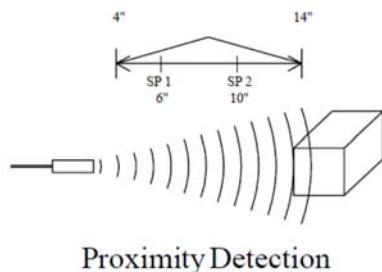

Proximity Detection

Proximity detection is the detection of an object in a given range. The detection range of the RPS-2300 is controlled by the "Range Control" potentiometers located on the front cover of the controller. These potentiometers provide two detection points as an object moves closer to the transducer. Any object within the desired range is detected, while objects out of range are ignored. The detect point is independent of size, material, and reflectivity. The Proximity Option is denoted by the part number RPS-2300-14.

Level Control

The RPS-2300 provides 2 individual set points with independent relay outputs. The most common application for this unit is in level control. Using the range control potentiometers a high set point (SP 1) and a low set point (SP 2) can be set to keep a level in between a specific window. When the level goes above the high point (SP 1), relay one would be activated. If the level goes below the low point (SP 2), relay two would be activated. The Level Control Option is denoted by using the same part number as the Proximity Option. (Example: RPS-2300-14).

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW

Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk




www.deeter.co.uk

The DEETER Group®

RPS-2300 Ultrasonic Sensor Controller with Remote Sensing Head

Specifications:

Operational Range	Adjustable 4" to 14" Adjustable 5" to 36" Adjustable 8" to 72"
Power Input	120 VAC 15 - 24VDC
Input Current	40 Milliamps
Ambient Temperature	0°C to 60°C or 32°F to 140°F
Enclosure	Controller - Metal Enclosure Transducer - Galvanized Steel 14" & 36", Plastic 72" Silicone Rubber Sensing Face, Epoxy Filled
Output (2) N.O., N.C.	Isolated form C relay .5 Amp Max. at 120 VAC
Transducer Frequency	222 kHz for 14" and 36", 150 kHz 72"
Adjustable Response Time	4" to 14" 5" to 36" 8" to 72"
ON	30mS - 2S 100mS - 2S 100mS - 2S
OFF	30mS - 2S 100mS - 2S 100mS - 2S
Weight	Controller - 34.2 ounces

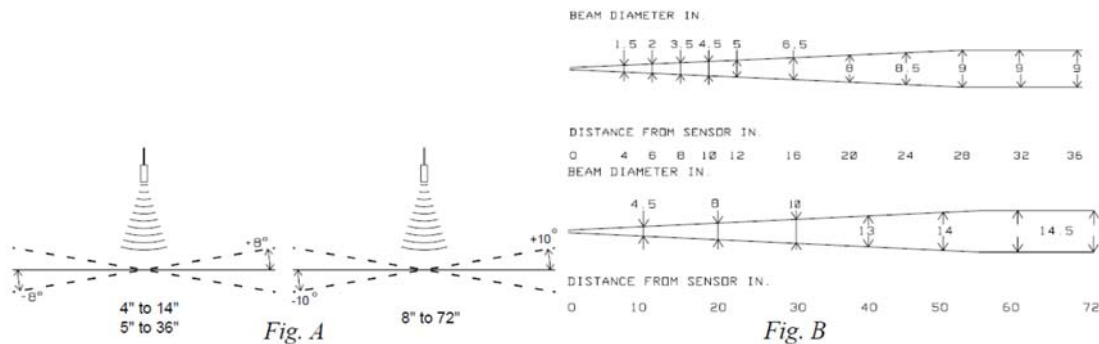

The DEETER Group®

RPS-2300 Ultrasonic Sensor Controller with Remote Sensing Head

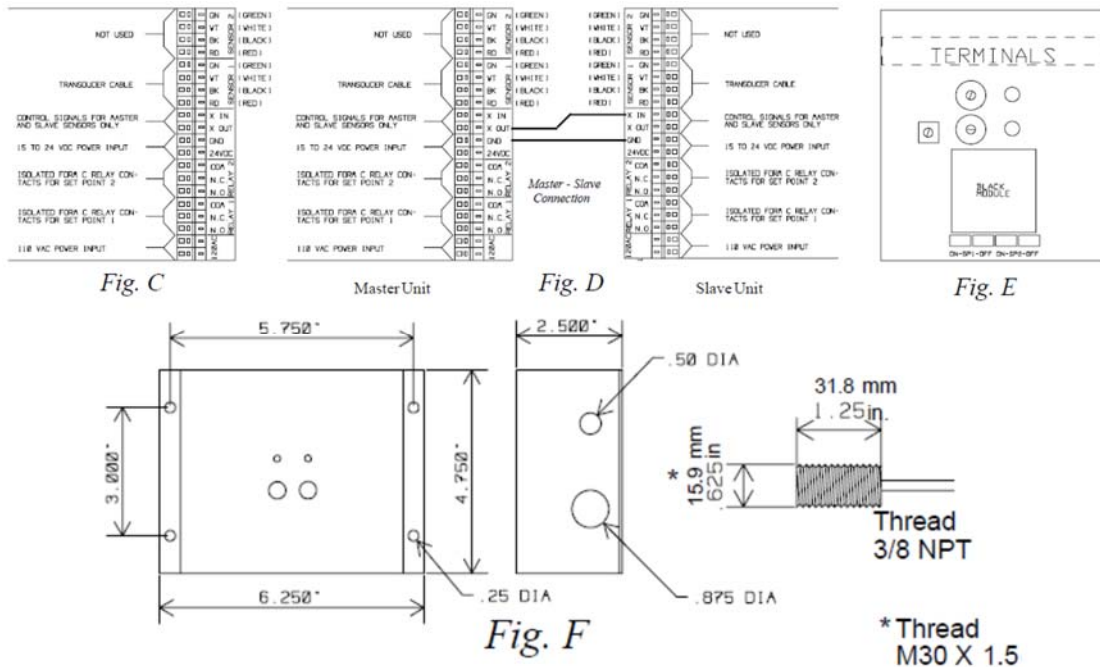


Figure:

- A - Angle of Tilt
- B - Beam Spread
- C - Wiring Diag.- For RPS-2300
- D - Wiring Diag.- For Master - Slave configuration
- E - Delay Controls - For RPS-2300
- F - Mounting Dimensions * *Transducer Diameter changes to 30mm when ordered with 72" range.*

Ordering Code

Part Number	Range	Output
RPS-2300-14	4" - 14"	(2) Isolated form C Relays
RPS-2300-36	5" - 36"	
RPS-2300-72	8" - 72"	

All electrical equipment should be installed by a qualified/certified electrician.

The Deeter Group follows a policy of continual development of its products and reserves the right to change specifications and/or features without notice

Deeter House
Valley Road
Hughenden Valley
Bucks HP14 4LW

Tel: +44 (0)1494 566 046
Fax: +44 (0)1494 563 961
Email: sales@deeter.co.uk



www.deeter.co.uk