


NOTES:

1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.

THIS SKETCH IS FOR
QUOTATION PURPOSES ONLY

FINISH
(TICK APPLICABLE):

	100% TIN
	GOLD

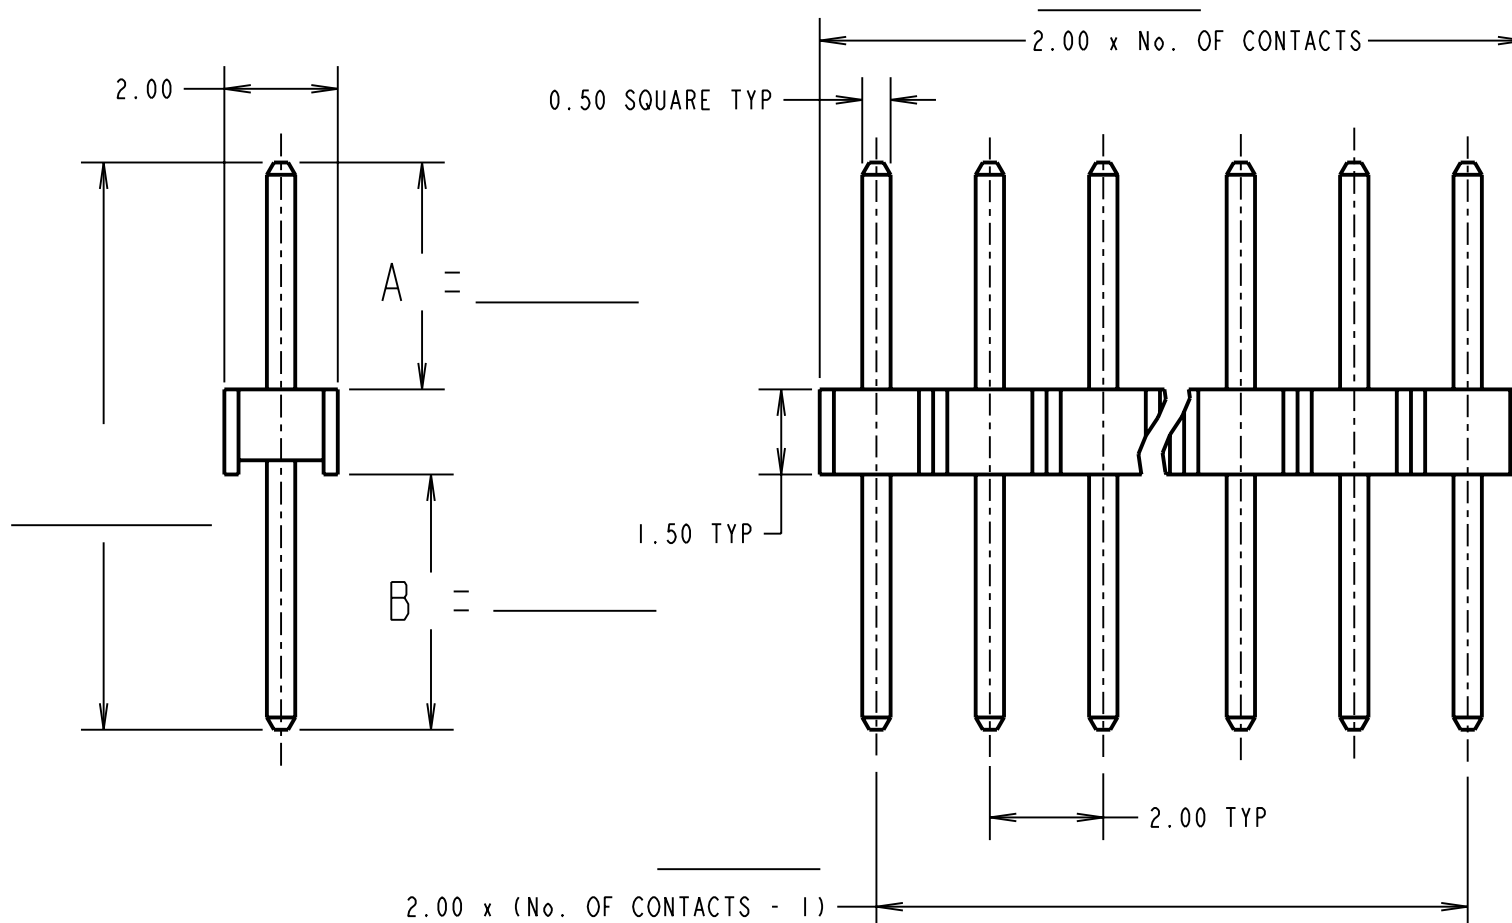

SPECIFICATION:

MATERIAL:
MOULDING = HIGH TEMPERATURE NYLON
6T,UL94V-0, BLACK
PINS = PHOSPHOR BRONZE
FINISH:
PINS: SEE BOX
ELECTRICAL:
CURRENT RATING = 1A MAX
CONTACT RESISTANCE = 30 mΩ MAX
INSULATION RESISTANCE = 100 MΩ MIN
DIELECTRIC STRENGTH = 650V AC/DC
ENVIRONMENTAL:
TEMPERATURE RANGE = -40°C TO +105°C
PACKING:
BAG

DATE OF SKETCH:

REQUESTED BY:

No. OF CONTACTS
PER ROW:

HARWIN

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

TITLE:
2.00mm PITCH SIL VERTICAL
PC TAIL PIN HEADER VARIANT

DRAWING No.:

M22- _____ V _____

SHT
1 OF 1

HARWIN INC U.S.A.	HARWIN PLC U.K.	HARWIN PTE SINGAPORE
TEL: (812) 542 2540	TEL: 023 9231 4545	TEL: 65 6779 4909
FAX: (812) 542 2541	FAX: 023 9231 4590	FAX: 65 6779 3868