


PLEASE NOTE:

B = _____

FIRST CONTACT

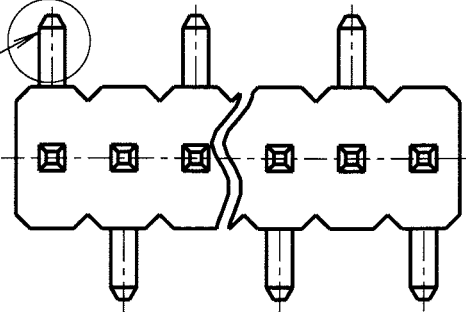

- NOTES:
1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
 2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.
 3. CO-PLANARITY: DEVIATION FROM FLATNESS OF SMT TAILS MUST NOT EXCEED 0.20mm.
 4. ANGULAR DISPLACEMENT OF SMT TAILS MUST NOT EXCEED 2° PER SIDE.

THIS SKETCH IS FOR QUOTATION PURPOSES ONLY

SPECIFICATION:

MATERIAL:
MOULDING = HIGH TEMPERATURE NYLON 6T, UL94V-0, BLACK


PINS = BRASS

FINISH:
PINS: SEE BOX BELOW

ELECTRICAL:
CURRENT RATING = 1A MAX
CONTACT RESISTANCE = 30 mΩ MAX
INSULATION RESISTANCE = 5,000 MΩ MIN
DIELECTRIC STRENGTH = 500V AC/DC

ENVIRONMENTAL:
TEMPERATURE RANGE = -55°C TO +105°C

PACKING:
BAG

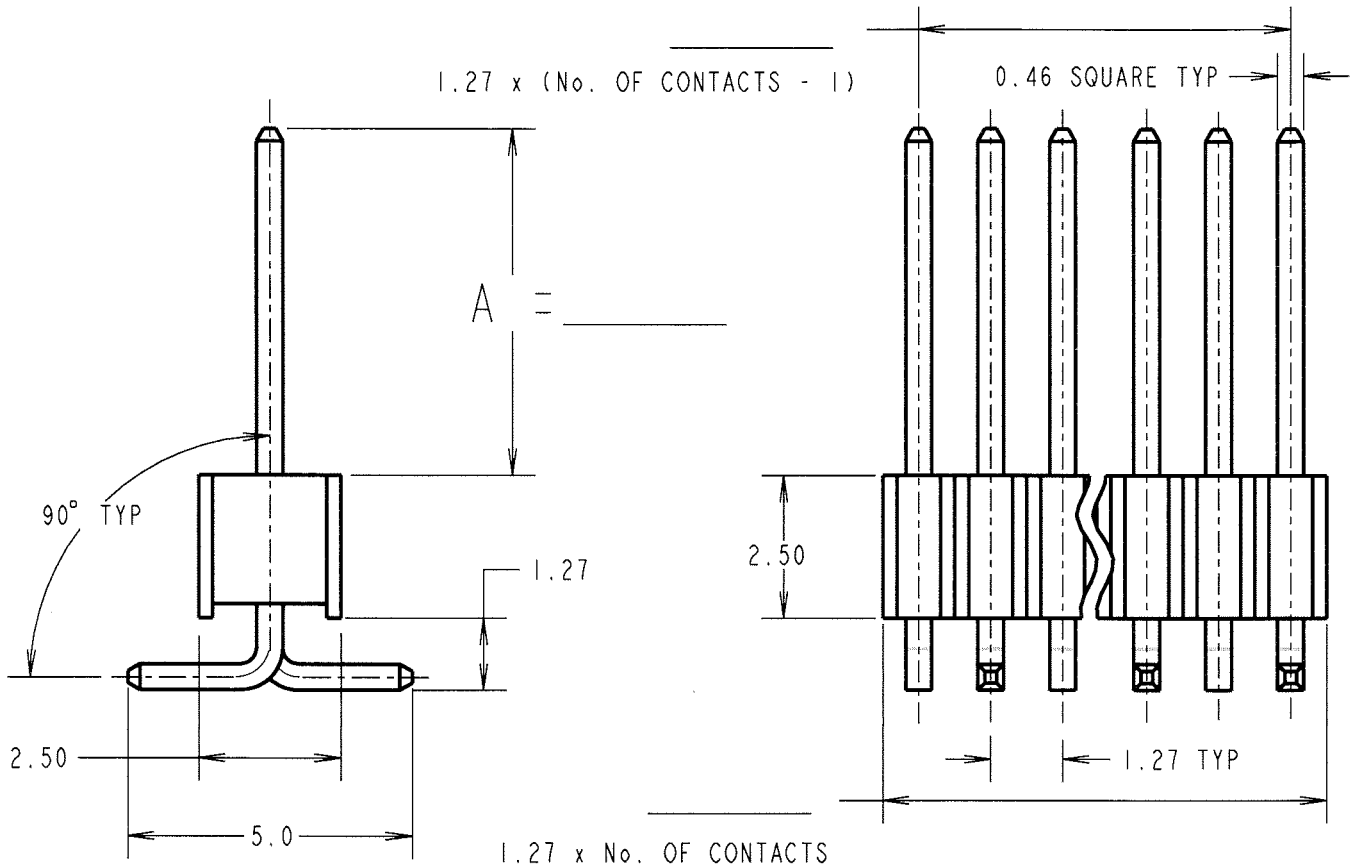

FINISH	
(TICK APPLICABLE):	
☐ 100% TIN	
☐ GOLD	

DATE OF SKETCH:
REQUESTED BY: