

Customer Information Sheet

DRAWING No.: M50-355XX42

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

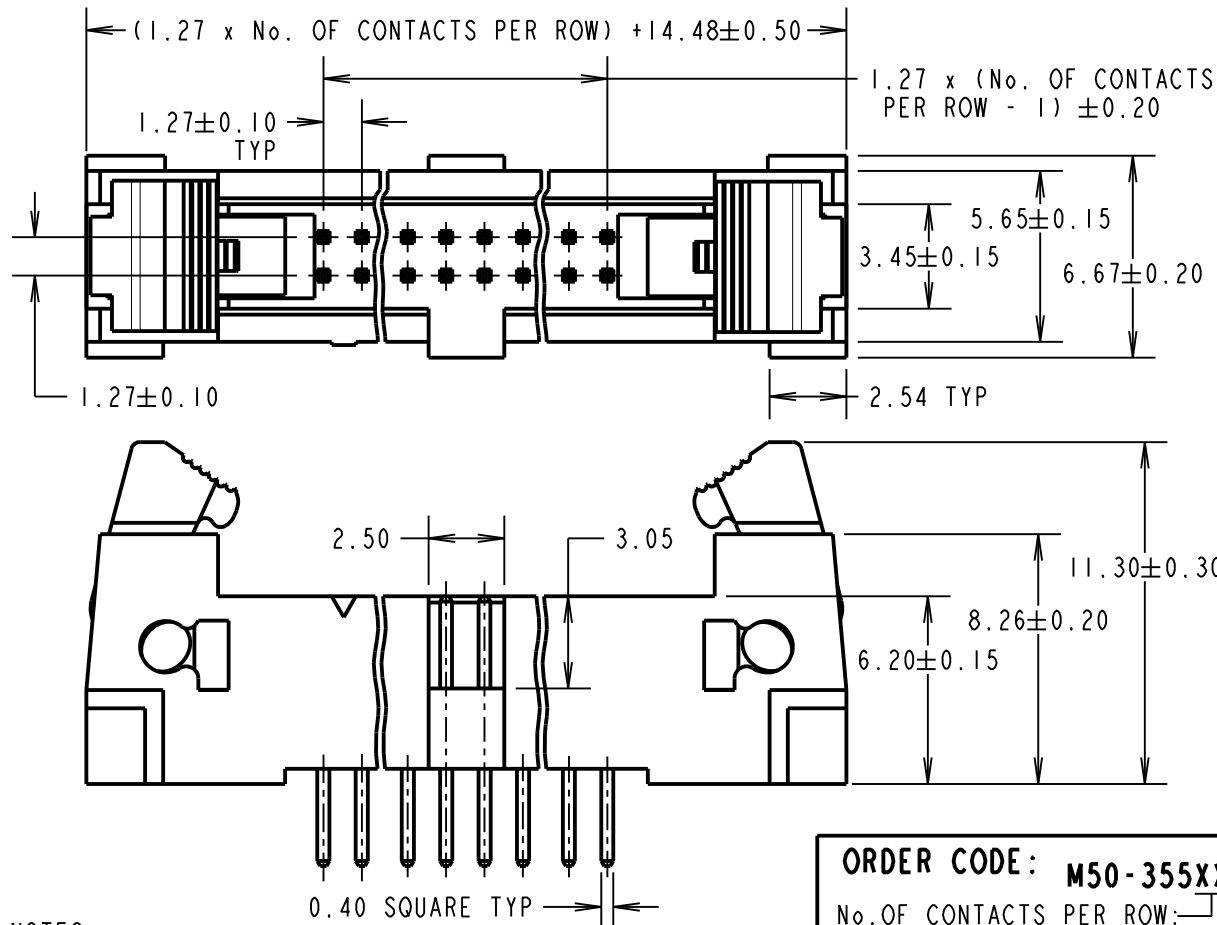**NOTES:**

1. FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C029XX (LATEST ISSUE).
2. ALL TOLERANCES ARE ± 0.25 UNLESS OTHERWISE STATED.
3. CONNECTOR IS RoHS AND REACH COMPLIANT.

ORDER CODE: M50-355XX42No. OF CONTACTS PER ROW:
05, 06, 07, 08, 10,
13, 17, 20, 25FINISH:
SELECTIVE GOLD, TIN**SPECIFICATIONS:****MATERIALS:**

MOULD = LCP, 30% G/F, UL94V-0

CONTACT = BRASS

FINISH:42 = 0.015-0.02 μ GOLD ON CONTACTS,2.54 μ 100% TIN ON TAILS, OVER 0.76-2.03 μ NICKEL**ELECTRICAL:**

RATED CURRENT = 1.75A

CONTACT RESISTANCE = 20m Ω MAX


WITHSTAND VOLTAGE = 1000V ACrms/DC FOR 1 MINUTE

INSULATION RESISTANCE = 5000M Ω MIN**ENVIRONMENTAL:**

OPERATING TEMPERATURE = -55°C TO +125°C

PACKING:

TUBE

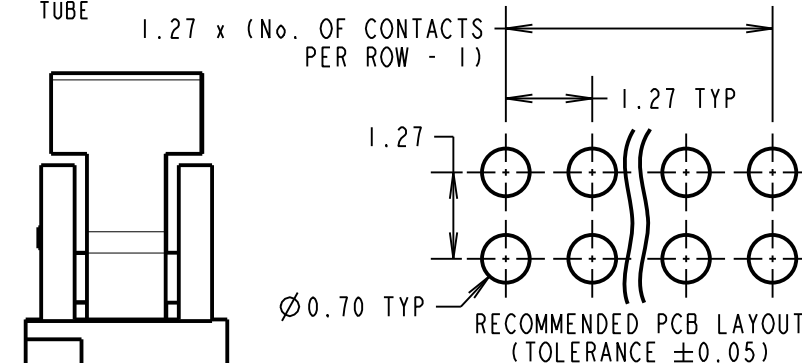

SB	5	08.06.15	12955
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		M.PLESTED	
DRAWN:		R.ADDE	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWINwww.harwin.com
technical@harwin.comTHIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.**TOLERANCES**X = ± 1 mm
X.X = ± 0.50 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm
ANGLES = $\pm 5^\circ$
UNLESS STATED**MATERIAL:**

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²**TITLE:**1.27mm DIL PC TAIL
EJECTOR HEADER

DRAWING NUMBER:

M50-355XX42SHT
2
OF
2