

Customer Information Sheet

DRAWING No.: P25-7017


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

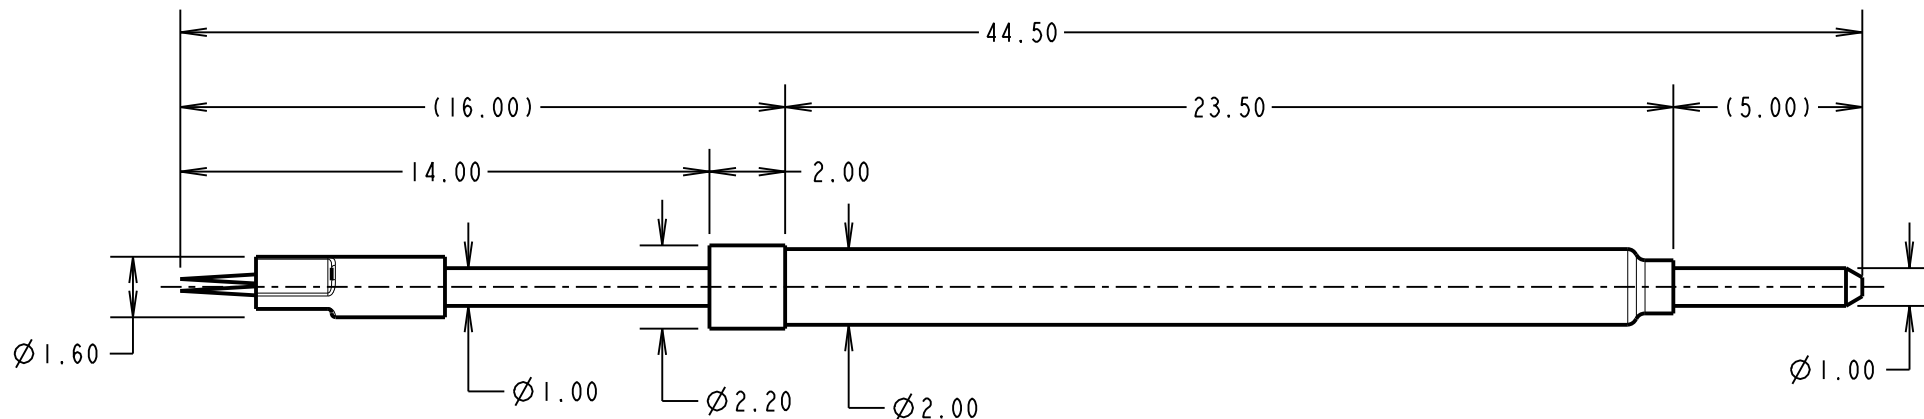

SPECIFICATIONS:

MATERIAL:

PLUNGER = HIGH CARBON STEEL

BARREL = ANTI-WEAR RESIN

SPRING = STAINLESS STEEL

FINISH:

PLUNGER = NICKEL

ELECTRICAL:

CURRENT RATING = 3A

CONTACT RESISTANCE = 30mΩ

MECHANICAL:

DURABILITY = 1,000,000 CYCLES

FULL TRAVEL = 6.00mm

SPRING FORCES:

AT FULL TRAVEL = 2.65N ±0.53N (270g ±20%)

ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +85°C

ORDER CODE:

P25-7017

PROBE HEAD
VARIANT

SM	3	09.03.11	11173
NAME	ISS.	DATE	C/NOTE
APPROVED: S. MCCULLAGH			
CHECKED: R. ADDE			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

NOTES:

- SUITABLE FOR A MINIMUM DISTANCE BETWEEN CENTRES OF 2.54mm.
- RECOMMENDED HOLE SIZE = Ø2.00mm

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

2.54mm MIN. CENTRE
ONE-PIECE SPRING PROBE

DRAWING NUMBER:

P25-7017

SHT
2 OF 2