

NOVOTURN

Multiturn-Sensor

non-contacting

Series RSM2800

digital SSI, SPI



Special features

- True Power On System: counts turns even when not powered. Patented non-volatile technology does not require gears or batteries
- non-contacting, magnetic
- long life
- 14 or 16 turn range (5040° or 5760°)
- continuous analog output signal across the selected angle range
- resolution 16 /18 bit
- independent linearity up to 0.031%
- protection class IP54, IP65 or IP67
- available with push-on coupling or marked shaft
- easy mounting
- see separate data sheet for analog interfaces

The RSM 2800 combines multiple-turn angle measurement, compact size, and attractive price. The patented NOVOTURN technology measures angles across multiple turns, providing high resolution and accuracy. This technology detects the turn count even while not powered. When powered up, the RSM2800 immediately reports the actual angular position, even if the input shaft was rotated while power was off.

The sensor utilizes contactless magnetic technology, providing a very long operational life time. It has excellent capabilities against mechanical shock and vibration.

The customer-selected measurement range is factory-programmed is either 14 or 16 turns.


The housing is made of a special high grade temperature resistant plastic material. The sensor is mounted with slots in the housing, which also provides for mechanical adjustment. Three shaft types are offered, including D-shaped and Novotechnik's easy-to-mount „push-on“ coupling.

The sensor is insensitive to dirt and moisture (IP-rating dependent). A shielded cable of 0.5 m to 10 meters length is available.


The RSM2800 provides a cost-effective alternative to conventional multi-turn encoders.

Applications for the RSM2800 exist in printing machines, drive and steering systems, wire length sensors, gate and door drives, fork-lifts, robotics, and many other areas.

Description	
Housing	high grade, temperature resistant plastic
Shaft	stainless steel
Bearings	bronze sleeve bearing
Electrical connection	shielded cable, AWG 24 (0.25 mm²) SSI
	shielded cable, AWG 26 (0.14 mm²) SPI

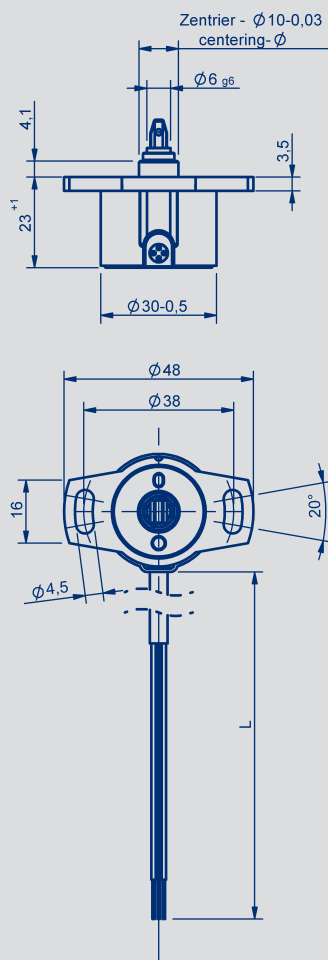


Shaft versions

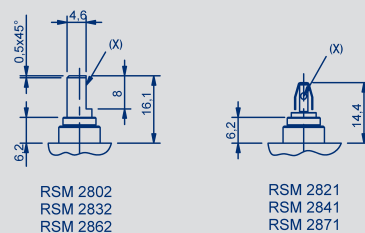


(X) = Wellenmarkierung / shaft marking


Recommended dimensions of driving shaft
for RSM2821 / RSM 2841 / RSM2871.
Parallel offset < 0.05 mm.

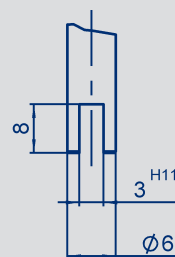


Recommended hole pattern
2 x $\phi 4,3$ oder 2 x M4

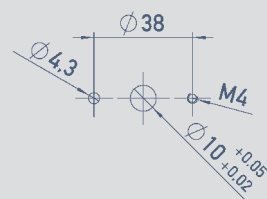



Ausgangssignal bei definiertem Bereich 14 Umdrehungen
Output Signal with defined range 14 turns

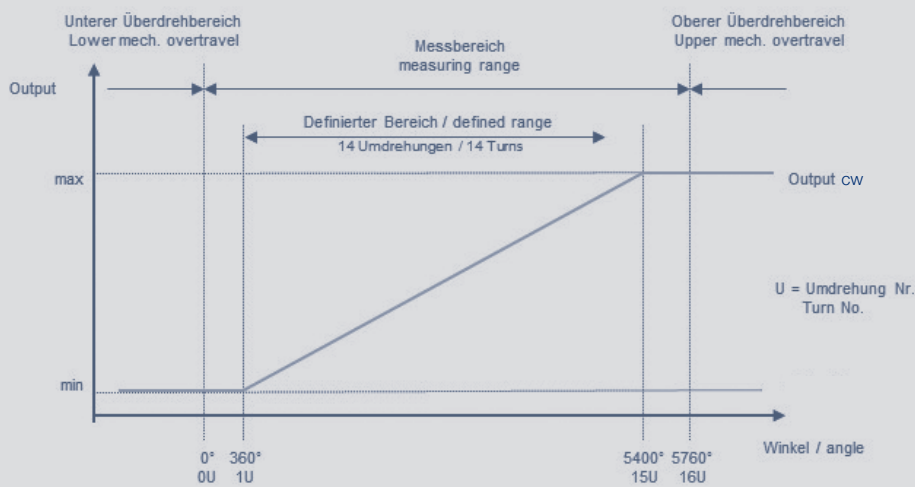

Ausgangssignal wenn definierter Bereich 16 Umdrehungen
Output Signal when defined range is 16 turns

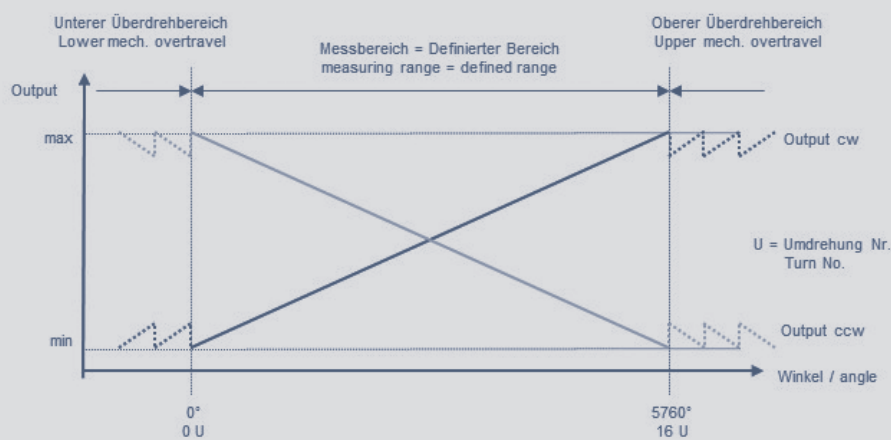


SSI Interface

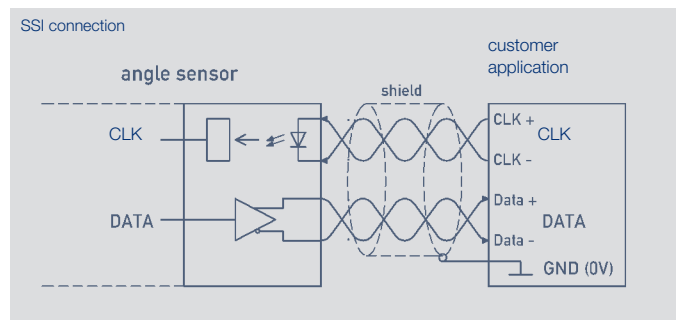
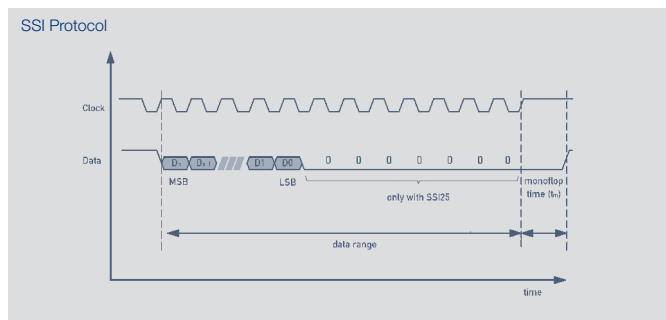


Connections SSI	
Signal	Wire colour
Supply voltage Ub	White
GND	Brown
Signal output SSI Data+	Pink
Signal output SSI Data-	Grey
Clock input SSI Clk+	Yellow
Clock input SSI Clk-	Green
Not assigned	Blue
Not assigned	Red

When the shaft marking points toward the cable outlet, the sensor is located on an integer turn position.

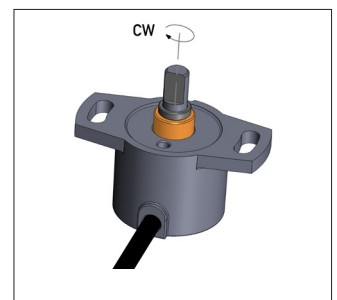


SPI Interface

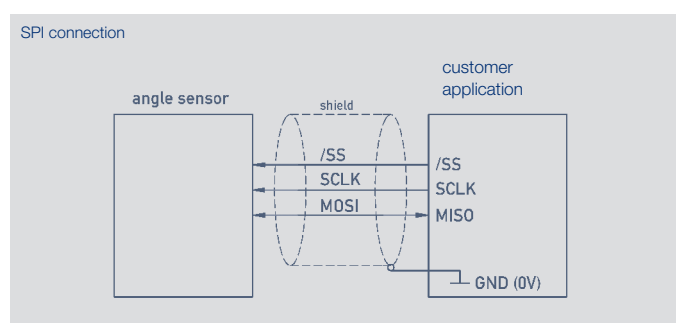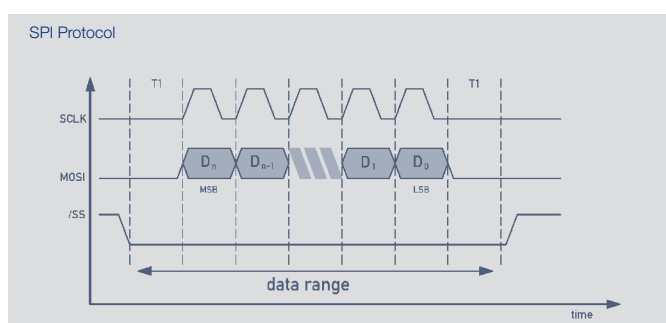

Connections SPI	
Signal	Wire colour
Supply voltage U_b	Green
GND	Brown
MOSI / MISO	Yellow
SCLK	Grey
/SS (slave select)	White

When the shaft marking points toward the cable outlet, the sensor is located on an integer turn position.

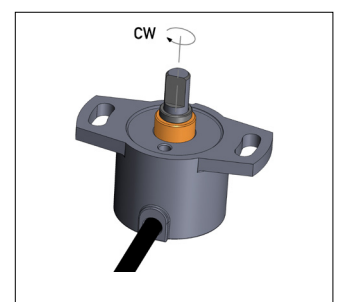

Technical Data - SSI Interface

RSM - 28 _ _ - 2 _ _ - 1 4 _ - _ _ _		
Supply voltage 24 VDC		
Mechanical Data		
Dimensions	see dimension drawing	
Mounting	with 2 screws M4 and washer	
Starting torque of mounting screws at housing flange	180	Ncm
Mechanical travel	360 continuous	°
Permitted shaft loading (axial and radial) static or dynamic force	20	N
Torque	0.15 (IP54), 0.5 (IP65) 1.0 (IP67)	Ncm
Maximum operational speed	800	RPM
Weight	~ 50	g
Electrical Data		
Supply voltage Ub	24 (10 ... 32)	V
Current consumption (w/o load)	typical 10	mA
Reverse voltage	yes, supply lines and outputs	
Short circuit protection	yes (vs. GND und Ub)	
Measuring range	see ordering specifications	
Max. Clock rate	100	kHz
Inputs	RS-422 compatible, CLK lines electrically isolated via optocouplers	
Ohmic load at outputs	≥ 120	Ω
Protocol	SSI	
Encoding	Gray code, Binary code	
Update rate (internal)	1	kHz
Monoflop time (tm)	20 ±1 (14/16 turns)	µs
Resolution	16 or 18 across the total measuring range	bit
Repeatability	0,5	°
Hysteresis	1	°
Absolute linearity	14 turns: max. 0.036	± % FS
	16 turns: max. 0.031	± % FS
Temperature error	± 0,1	% FS
Insulation resistance (500 VDC)	≥ 10	MOhms
Cross-section cable	AWG 24, 0.25	mm²
Environmental Data		
Temperature range	-40...+85	°C
Vibration IEC 68000-2-6	5...2000	Hz
	Amax = 0.75	mm
	amax = 20	g
Shock IEC 68000-2-27	50 (6 ms)	g
Life	> 50 x 10 ⁶	movements
MTTF (DIN EN ISO 13849-1 parts count method, w/o load)	173	years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us.	
Protection class (to DIN EN 60529)	IP54 / IP65 / IP67	
EMC compatibility	EN 61000-4-2 electrostatic discharges (ESD) 4kV, 8kV EN 61000-4-3 electromagnetic fields 10V/m EN 61000-4-4 electrical fast transients (Burst) 1kV EN 61000-4-6 conducted disturbances, induced by RF fields 10V/m eff. EN 61000-4-8 Power frequency magnetic fields 3A/m EN 55016-2-3 Radiated disturbances class B	

Technical Data - SPI Interface

	RSM - 28 _ _ _ - 2 _ _ _ - 2 8 _ - _ _ _	
	Supply voltage 5 VDC	
Mechanical Data		
Dimensions	see dimension drawing	
Mounting	with 2 screws M4 and washer	
Starting torque of mounting screws at housing flange	180	Ncm
Mechanical travel	360 continuous	°
Permitted shaft loading (axial and radial) static or dynamic force	20	N
Torque	0.15 (IP54), 0.5 (IP65) 1.0 (IP67)	Ncm
Maximum operational speed	800	RPM
Weight	~ 50	g
Electrical Data		
Supply voltage Ub	5 (4.5 ... 5.5)	V
Current consumption (w/o load)	typical 25	mA
Reverse voltage	yes, supply lines and outputs	
Short circuit protection	yes (vs. GND and Ub)	
Measuring range	see ordering specifications	°
Max. Clock rate	100	kHz
Level	TTL (see application note SPI protocol)	
Protocol	SPI	
Encoding	Binary code	
Update rate (internal)	1	kHz
Resolution	16 across the total measuring range	bit
Repeatability	0.5	°
Hysteresis	1	°
Absolute linearity	14 turns: max. 0.036	± % FS
	16 turns: max. 0.031	± % FS
Temperature error	± 0.1	% FS
Insulation resistance (500 VDC)	≥ 10	MΩms
Cross-section cable	AWG 26, 0.14	mm²
Environmental Data		
Temperature range	-40...+85	°C
Vibration IEC 68000-2-6	5...2000	Hz
	Amax = 0.75	mm
	amax = 20	g
Shock IEC 68000-2-27	50 (6 ms)	g
Life	> 50 x 10 ⁶	movements
MTTF (DIN EN ISO 13849-1 parts count method, w/o load)	193	years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
Protection class (nach DIN EN 60529)	IP54 / IP65 / IP67	
EMC compatibility	EN 61000-4-2 electrostatic discharges (ESD) 4kV, 8kV EN 61000-4-3 electromagnetic fields 10V/m EN 61000-4-4 electrical fast transients (Burst) 1kV EN 61000-4-6 conducted disturbances, induced by RF fields 10V/m eff. EN 61000-4-8 Power frequency magnetic fields 3A/m EN 55016-2-3 Radiated disturbances class B	

Novotechnik
Messwertaufnehmer OHG
Postfach 4220
73745 Ostfildern (Germany)
Horbstraße 12
73760 Ostfildern (Germany)
Telefon +49 711 4489-0
Telefax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© 07/2014
Subject to changes.
Printed in Germany.

Ordering specifications

Preferred types printed in bold:

- reduced delivery time for up to 25 pieces
- best low-volume pricing

Supply voltage

1: $U_b = 24 \text{ V}$ (10 ... 32 V)

2: $U_b = 5 \text{ V}$ (4.5 ... 5.5 V)

Interface parameters for SSI Interface (1 __)

41: 24 V, SSI 16 bit, Gray code, rising cw

42: 24 V, SSI 16 bit, Gray code, rising ccw

43: 24 V, SSI 25 bit (18 bit data), Gray code, rising cw

44: 24 V, SSI 25 bit (18 bit data), Gray code, rising ccw

45: 24 V, SSI 16 bit, Binary code, rising cw

46: 24 V, SSI 16 bit, Binary code, rising ccw

47: 24 V, SSI 25 bit (18 bit data), Binary code, rising cw

48: 24 V, SSI 25 bit (18 bit data), Binary code, rising ccw

Interface parameters for SPI Interface (2 __)

81: 5 V, SPI 16 bit, Binary code, rising cw

82: 5 V, SPI 16 bit, Binary code, rising ccw

Electrical connection

302: Round cable 5-pol., 1,0 m (0.14 mm², shielded) SPI

432: Round cable 8-pol., 1,0 m (0.25 mm², shielded) SSI

Cable versions and assembled connectors on request.

R S M - 2 8 3 2 - 2 1 4 - 2 8 1 - 3 0 2

Series

Model

2: digital interface

Number of turns output characteristics

14: 14 turns, measuring range controlled

16: 16 turns, measuring range not controlled

Mechanical version

2802: 6 mm shaft with flattening, IP54

2832: 6 mm shaft with flattening, IP65

2862: 6 mm shaft with flattening, IP67

2821: push-on coupling, IP54

2841: push-on coupling, IP65

2871: push-on coupling, IP67

other shaft versions on request