
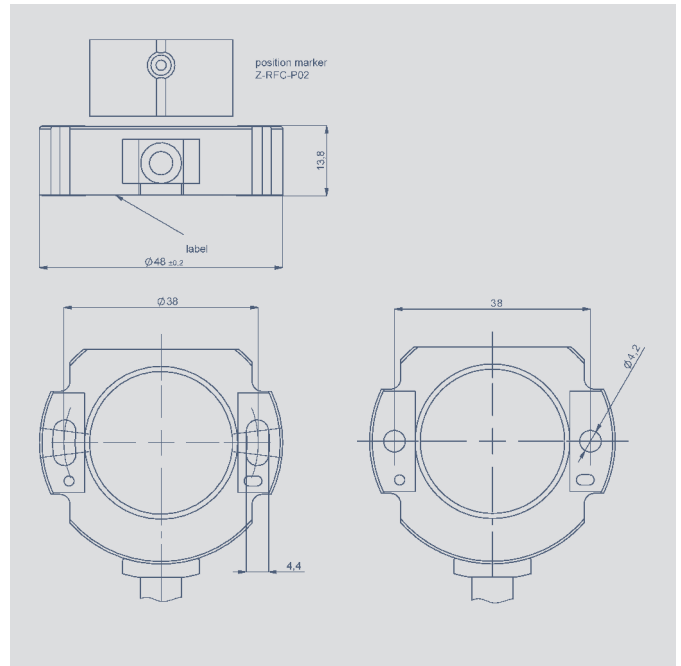


NOVOHALL
Rotary Sensor
touchless technology
transmissive

Series RFC-4800

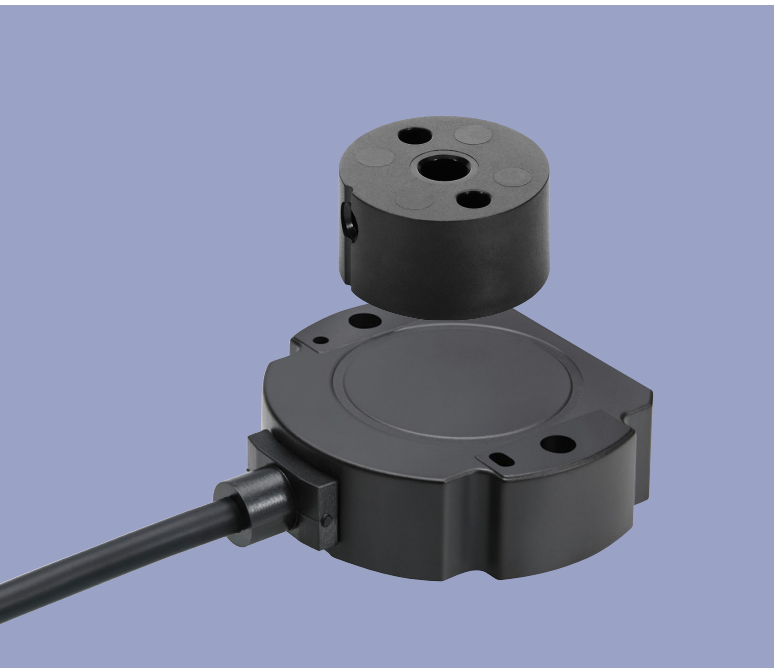

Special features

- Touchless hall technology
- Electrical range up to 360°
- 2-part, mechanically decoupled
- High protection class, IP67, IP6K9K
- Resolution up to 14 Bit
- Wear-free
- Temperature range -40 °C to +125 °C
- Single and multi-channel versions
- Optimized for use in industrial and mobile applications
- Interfaces: Voltage, current, SSI, incremental, CANopen, SPI
- Customized versions


Applications

- Manufacturing Engineering
 - Textile machinery
 - Packaging machinery
 - Sheet metal and wire machinery
- Medical engineering
- Mobile working machines
 - Industrial trucks
 - Construction machinery
 - Agricultural and forestry machinery
- Marine applications




Contents

Drawings	3
Mechanical Data	4
Characteristics	5
Analog Versions for Industrial Applications	
Technical Data	6
Ordering Specifications	7
Analog Versions for Mobile Applications	
Technical Data	8
Ordering Specifications	9
Digital Versions	
SSI	10
Incremental	11
SPI	14
Ordering Specifications	15
Fieldbus Versions	
CANopen	16
Ordering specifications	17
Accessories	
Position Markers	18
M12 Connector System	21
Displays	24
Customized Versions	
Connecting Options	25

Drawings

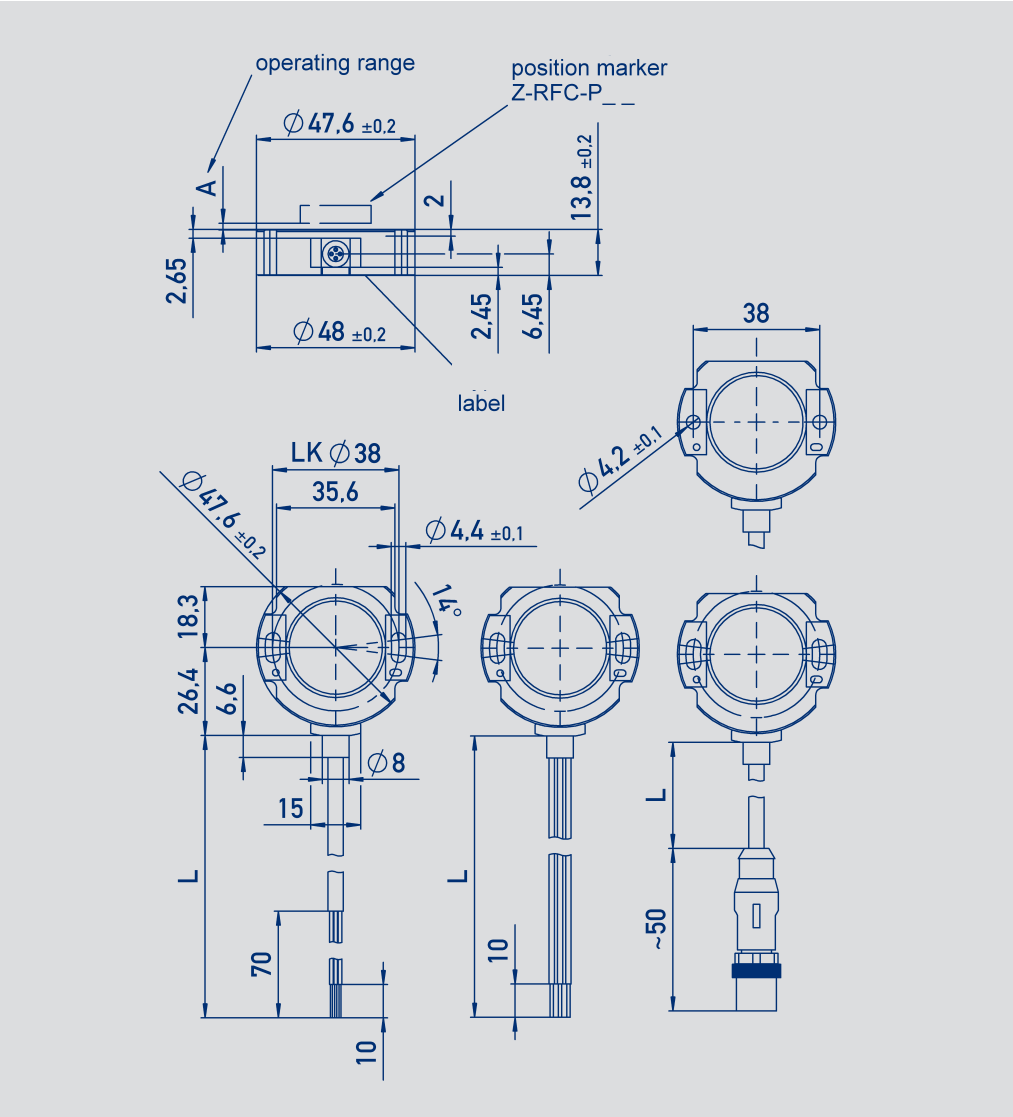

CAD data see
www.novotechnik.de/en/download/cad-data/




Mechanical Data


Description		
Housing	high grade, temperature resistant plastic	
Electrical connection	Cable 4x 0.14 mm², AWG 26, TPE, shielded (analog voltage / current CE) Cable 4x 0.14 mm², AWG 26, TPE, unshielded (analog voltage / current mobil) Cable 4x 0.5 mm², AWG 20, TPE, shielded (CANopen) Cable 5x 0.14 mm², AWG 26, PUR, shielded (SPI) Cable 8x 0.25 mm², AWG 24, TPE, shielded (SSI, Incremental) Wire 0.5mm², AWG 20, PVC, (analog voltage / current, incr. Open Collector) Connector M12x1, 4-pin / 5-pin / 8-pin with cable L=0.15 m	
Mechanical Data		
Dimensions	see dimension drawing	
Mounting	with 2 lens flange head screws M4 (enclosed in delivery)	
Fastening torque of mounting screws	250	Ncm
Mechanical travel	360 continuous	°
Maximum operational speed	mechanically unlimited	
Weight (without connection)	approx. 50	g
Vibration IEC 60068-2-6	5...2000	Hz
	Amax = 0.75	mm
	amax = 20	g
Shock IEC 60068-2-27	50 (6 ms)	g
Life	mechanically unlimited	
Protection class DIN EN 60529	IP67 / IP6K9K (not with M12 connector)	

Characteristics


One channel, cw

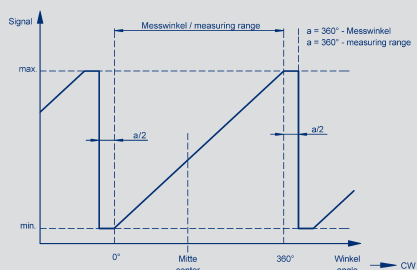


One channel, ccw

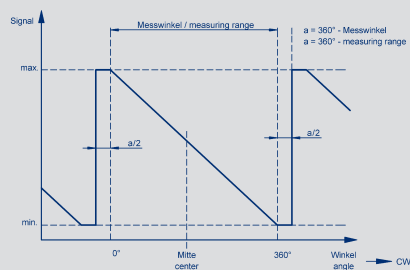


Crossed characteristics, channel 1 cw

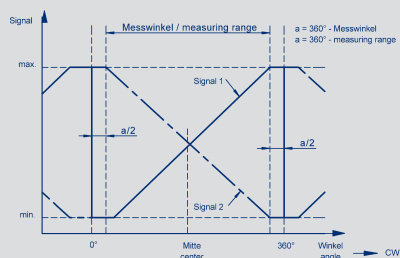


On request:
two channel, signal 2 = 0.5 x signal 1

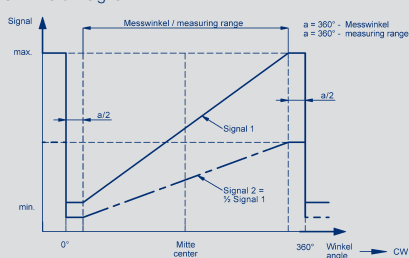


On request:
Trapeze characteristic




On request:
different gradients



On request:
2 staggered characteristics



On request:
Parabolic characteristic



Technical Data - analog Versions for Industrial Applications

Technical Data - Versions for Industrial Applications

Design optimized for use in machine and plant engineering. High reliability, simple interface to PLC, high variety.

Type designations	RFC-4801- _ _ _ - 2 _ _ - _ _ _ ratiometric	RFC-4801- _ _ _ - 1 1 _ - _ _ _ voltage	RFC-4801- _ _ _ - 1 2 _ - _ _ _ current	
Electrical Data				
Supply voltage Ub	5 (4,5 ... 5,5)	24 (18 ... 30)	24 (18 ... 30)	VDC
Current consumption (w/o load)	typical 15 (typical 8 on request) per channel			mA
Reverse voltage	yes, supply lines	yes	yes	
Short circuit protection	yes (vs. GND and supply voltage)			
Measuring range	0 ... 30 up to 0 ... 360, in 10°-steps			°
Number of channels	1 / 2	1	1	
Update Rate	typical 5			kHz
Resolution	12			bit
Repeatability	0.1			°
Hysteresis	< 0.1			°
Independent linearity	≤ 0.5			±% FS
Output signal	ratiometric to supply voltage 0.25...4.75 V 0.5...4.5 V (load ≥ 1 kΩ)	0.1...10 V (load ≥ 10 kΩ)	4...20 mA (burden max. 500 Ω)	
Temperature error at measuring range 30 up to 170°	±0,825	±1,24	±1,24	% FS
Temperature error at measuring range 180 up to 360°	±0,41	±0,66	±0,66	% FS
Insulation resistance (500 VDC)	≥ 10			MΩ
Cross-section cable	AWG 26, 0.14			mm²
Environmental Data				
Temperature range	-40...+125	-40...+125	-40...+105	°C
	-25...+85 with M12-connector		-40...+125, if supply voltage ≤ 28 V	°C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	290 (one-channel) 288 (per channel) partly redundant	98	111	years years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us			
EMC compatibility	EN 61000-4-2 Electrostatic discharge (ESD) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields 10 V/m EN 61000-4-4 Electrical fast transients (burst) 1 kV EN 61000-4-6 Conducted disturbances, induced by RF-fields 10 V eff. EN 61000-4-8 Power frequency magnetic fields 3 A/m EN 55011/EN 55022/A1 Radiated disturbances class B			

Connection assignment

One-channel versions

Signal	Lead wires	Cable	M12
Supply voltage Ub	Red	Green	1
GND	Black	Brown	3
Signal output	Blue	White	2
Shield	-	Shield	Shield
Not assigned	-	Yellow	4

Redundant versions

Signal	Lead wires	Cable	M12
Supply voltage Ub 1	Red	Green	1
GND 1	Black	Brown	3
Signal output 1	Blue	White	2
Supply voltage Ub 2	Red/White	-	-
GND 2	Black/White	-	-
Signal output 2	Blue/White	Yellow	4
Shield	-	Shield	Shield

Ordering specifications - analog Versions

- Voltage
- Current

for Industrial Applications

Ordering specifications for Industrial Applications

Preferred types printed in bold:

- Delivery time up to 25 pcs. within 10 working days
- No low volume surcharge

Supply voltage

- 1: Supply voltage $U_b = 24 \text{ V}$ (18...30 V)
- 2: Supply voltage $U_b = 5 \text{ V}$ (4.5...5.5 V)

Output signal supply voltage $U_b = 24 \text{ V}$

- 1: 0.1...10 V (only one-channel)
2: 4...20 mA (only one-channel)

Output signal supply voltage $U_b = 5 \text{ V}$

- 1: 0.25...4.75 V ratiometric to supply voltage U_b
2: 0.5...4.5 V ratiometric to supply voltage U_b

| Output characteristics

- 1: Rising CW
2: Rising CCW
3: Crossed output channel 1 rising CW (partly redundant)

Electrical connections

- 201: Cable 4-pol., 0,5 m shielded
202: Cable 4-pol., 1 m shielded
 206: Cable 4-pol., 3 m shielded
 210: Cable 4-pol., 5 m shielded
 220: Cable 4-pol., 10 m shielded
501: M12 connector 4-pin, with cable, L = 0.15 m, shielded
 Cable versions and assembled connectors on request

R F C - 4 8 0 1 - 6 3 6 - 2 1 1 - 2 0 2

Series

Mechanical version

- 4801: Elongated hole mounting for easy adjustment
4802: Round hole mounting

Measuring range

- 03: Angle 0° ... 30° min.
...
06, 12, 18, 24, 36
...
36: Angle 0° ... 360° max.
Other angles on request

Number of channels

- 6: Single output 1 x supply voltage U_b / 1 x output
7: partly redundant 1 x supply voltage U_b / 2 x output (only at supply voltage $U_b = 5\text{ V}$)

Technical Data - Analog Versions - Voltage - Current for Mobile Applications

Technical Data - Versions for Mobile Applications

These versions are optimized for the high requirements in mobile applications.
Tested to the highest requirements as ISO-pulses and high interferences to ISO 11452.

Type designations	RFC-4801- ratiometric	RFC-4801- voltage	RFC-4801- current	
Electrical Data				
Supply voltage Ub	5 (4.5...5.5)	12/24 (9...34)	12/24 (9...34)	VDC
Current consumption (w/o load)	typical 15 (typical 8 on request) per channel			mA
Reverse voltage	yes, supply lines	yes	yes	
Short circuit protection	yes (vs. GND and supply voltage)			
Measuring range	0 ... 30 up to 0 ... 360, in 10°-Steps			°
Number of channels	1 / 2	1 / 2	1	
Update Rate	typical 5			kHz
Resolution	12			bit
Repeatability	0,1			°
Hysteresis	< 0,1			°
Independent linearity	≤ 0,5			±% FS
Output signal	ratiometric to supply voltage Ub 0.25...4.75 V 0.5...4.5 V (load ≥1 kΩ)	0.25...4.75 V 0.5...4.5 V (load ≥10 kΩ)	4...20 mA (burden max. 250 Ω)	
Temperature error at measuring range 30 and 170°	±0.825	±1.24	±1.24	% FS
Temperature error at measuring range 180 and 360°	±0.41	±0.66	±0.66	% FS
Insulation resistance (500 VDC)	≥ 10			MΩ
Cross-section cable	AWG 26, 0.14			mm²
Cross-section wire	AWG 20, 0.5			mm²
Environmental Data				
Temperature range	-40...+125	-40...+125	-40...+105 -40...+125, if supply voltage ≤ 28 V	°C °C
	-25...+85 with connector M12			°C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	290 (one channel) 288 (per channel) partly redundant 290 (per channel) fully redundant	91 101 (per channel) partly redundant	109	years years years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us			
EMC compatibility	ISO 11452-2 Radiated EM RF fields, 100 V/m ISO 11452-4 BCI (Bulk current injection) 100 mA CISPR25 Radiated emission GW 5 SAE J1113-2 Conducted immunity level 2 SAE J1113-13 Packaging and handling 4-20 kV SAE J1113-22 Radiated magnetic field 80 µT SAE J1113-26 AC power line electric field 15 kV EN61000-4-2 Immunity to static discharge (ESD) 4 kV, 8 kV, 15 kV EN 55011/EN 55022/A1 Radiated disturbances class B			

Connection assignment



One-channel versions				Redundant versions			
Signal	Lead wires	Cable	M12	Signal	Lead wires	Cable	M12
Supply voltage Ub	Red	Green	1	Supply voltage Ub 1	Red	Green	1
GND	Black	Brown	3	GND 1	Black	Brown	3
Signal output	Blue	White	2	Signal output 1	Blue	White	2
Not assigned	-	Yellow	4	Supply voltage Ub 2	Red/White	-	-
				GND 2	Black/White	-	-
				Signal output 2	Blue/White	Yellow	4
				Shield	-	Shield	Shield

[back to contents](#)


Technical Data

SSI Interface

Type designations	RFC-48 _ _ -214-41 _ _ _ _ Supply voltage 5 VDC	RFC-48 _ _ -214 - 44 _ _ _ _ Supply voltage 24 VDC (available 3rd quarter 2015)
Electrical Data		
Protocol	SSI 13 bit (12 bit data + 1 stop bit)	
Inputs	RS422 compatible, CLK lines via optocoupler galvanically isolated	
Monoflop time (tm)	16	µs
Coding	Gray	
Update rate (internal)	2 000	kHz
Resolution across 360°	12	bit
Measuring range	360	°
Maximum operational speed position marker	30 000, higher speeds on request	min-1
Independent linearity	typical 0,5	±% FS
Repeatability	0.2	°
Hysteresis	0.7, lower hysteresis on request	°
Temperature error	0.375	±% FS
Supply voltage Ub	5 (4.5 ... 5.5)	24 (18...30) VDC
Current consumption (w/o load)	typical 27	typical 10 mA
Reverse voltage	yes, supply lines	
Short circuit protection	yes (output vs. supply voltage and GND)	yes (output vs. GND)
Ohmic load at outputs	≥ 120	Ω
Max. clock rate	1	MHz
Insulation resistance (500 VDC)	≥ 10	MΩ
Cross-section cable	AWG 24, 0.25 mm²	
Environmental Data		
Operating temperature	-40...+85	°C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	141	102 years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
EMC compatibility	EN 61000-4-2 electrostatic discharge (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (burst) 1 kV EN 61000-4-6 I conducted disturbances, induced by RF fields 10 V eff. EN 61000-4-8 Power frequency magnetic fields 30 A/m EN 55016-2-3 Noise radiation class B	

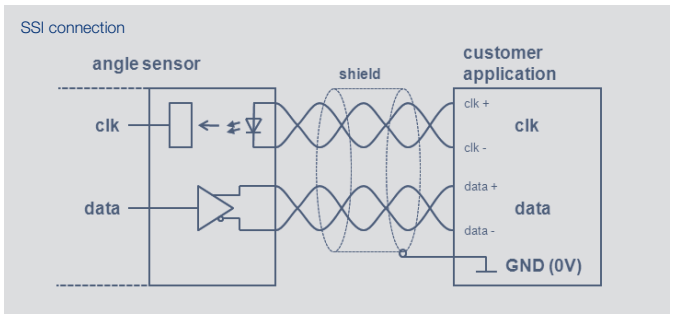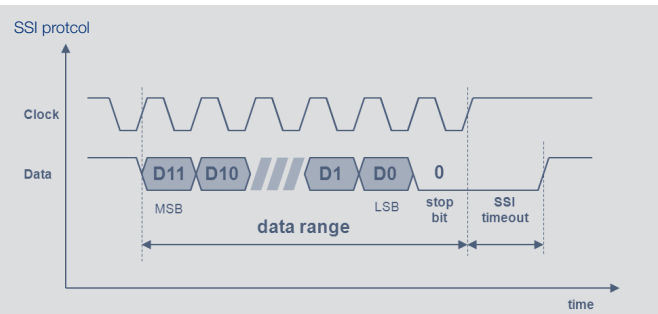

Connection assignment		
Signal	Cable Code 4 _ _	Connector M12 Code 531
Supply voltage Ub	White	Pin 1
GND	Brown	Pin 2
Signal output SSI Data+	Pink	Pin 6
Signal output SSI Data-	Grey	Pin 5
Clock input SSI Clk+	Yellow	Pin 4
Clock input SSI Clk-	Green	Pin 3
Not assigned	Blue	Pin 7
Not assigned	Red	Pin 8



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position.


Technical Data Incremental Interface

Type designations	RFC-48__-2__-5__-__-__ Supply voltage 5 VDC	RFC-48__-2__-530-__-__ Supply voltage 24 VDC, TTL (available 3rd quarter 2015)	RFC-48__-2__-534-__-__ Supply voltage 24 VDC, HTL (available 3rd quarter 2015)
Electrical Data			
Outputs	A+ / A- B+ / B- Z+ / Z-		
Level	RS-422, TTL-compatible	RS-422, TTL-compatible	HTL-compatible, Push-Pull
Length Z-pulse	90 electrical, between 2 edges A / B		°
Pulses per revolution	1024, other resolutions see page 12		ppr
Counts per revolution (after quadrature)	4096		
Option Low Speed			
- Minimum edge separation	8		µs
- Minimum input frequency of counter input	32		kHz
- Maximum operational speed	1 800		min ⁻¹
Option High Speed			
- Minimum edge separation	0.5		µs
- Minimum input frequency of counter input	500		kHz
- Maximum operational speed	29 000, higher speeds on request		min ⁻¹
Measuring range	360		°
Independent linearity	typical 0.5		±% FS
Repeatability	0.2		°
Hysteresis	0.7, lower hysteresis on request		°
Temperature error	0.375		±% FS
Supply voltage U _b	5 (4.5 ... 5.5)	24 (18...30)	24 (18...30) VDC
Current consumption (w/o load)	typical 20	typical 10	typical 10 mA
Reverse voltage	yes, supply lines		
Short circuit protection	yes, all outputs vs. GND and supply voltage	yes, all outputs vs. GND	yes, all outputs vs. GND and supply voltage
Ohmic load at output	≥ 120 per channel A / B / Z	≥ 120 per channel A / B / Z	≥ 750 per channel A / B / Z Ω
Insulation resistance (500 VDC)	≥ 10		MΩ
Cross-section cable	AWG 24, 0.25		mm ²
Environmental Data			
Operating temperature	-40...+85		°C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	183	122	122 years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us		
EMC compatibility	EN 61000-4-2 electrostatic discharge (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (burst) 1 kV EN 61000-4-6 conducted disturbances, induced by RF fields 10 V eff. EN 61000-4-8 Power frequency magnetic fields 30 A/m EN 55016-2-3 Noise radiation class B		




Connection assignment


Signal	Cable Code 4 __	Connector M12 Code 531
Supply voltage U _b	White	Pin 1
GND	Brown	Pin 2
A+	Yellow	Pin 4
A-	Green	Pin 3
B+	Pink	Pin 6
B-	Grey	Pin 5
Z+	Blue	Pin 7
Z-	Red	Pin 8




When the marking of the position marker is pointing away from the cable, the output is in the vicinity of the reference pulse (Z).
Rotational direction CW:
A leads before B.

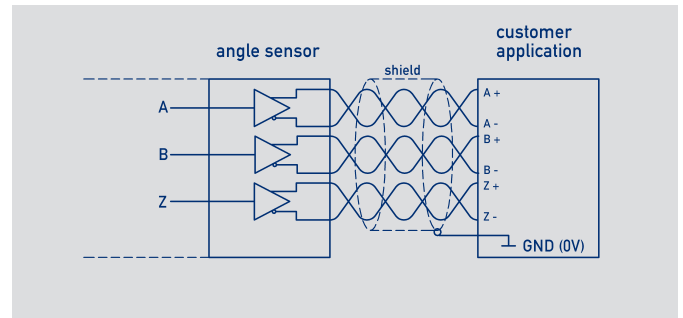

*) The requirement for the minimum input frequency of counter input is reduced at lower speed (see below charts).

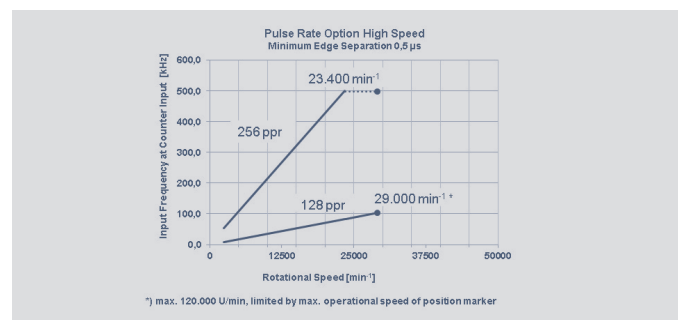

*) The requirements for the minimum input frequencies of counter input is reduced at lower speed (see page 12).


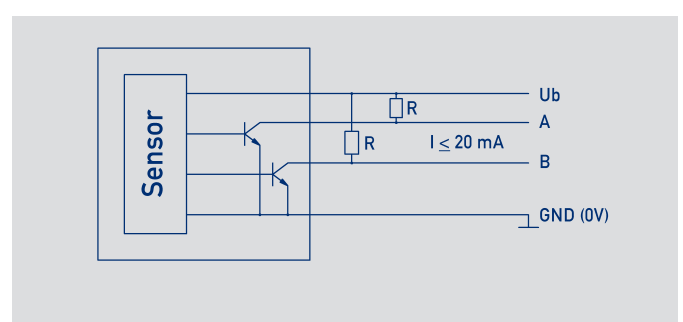


Rotational direction CW:
A leads before B


Technical Data

SPI Interface

Type designations	RFC-48 _-2 _-8 _- _- _-
	Supply voltage 5 VDC
Electrical Data	
Supply voltage Ub	5 (4.5 ... 5.5) VDC
Current consumption (w/o load)	typical 15 mA
Reverse voltage	yes, supply voltage
Short circuit protection	yes (vs. GND and supply voltage)
Measuring range	360 °
Max. clock rate	400 kHz
Level SCLK, MOSI, /SS	TTL level (s. application note SPI protocol)
Protocol	SPI
Update rate internal	5 kHz
Resolution across 360°	14 bit
Repeatability	0.1 °
Hysteresis	< 0.1 °
Independent linearity	≤ 0.5 ±% FS
Temperature error	±0.625 % FS
Insulation resistance (500 VDC)	≥ 10 MΩ
Cross-section cable	AWG 26, 0.14 mm²
Environmental Data	
Operating temperature	-40...+85 °C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	272 years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
EMC compatibility	EN 61000-4-2 electrostatic discharge (ESD) 4 kV, 8 kV EN 61000-4-3 electromagnetic fields 10 V/m EN 61000-4-4 electrical fast transients (Burst) 1 kV EN 61000-4-6 conducted disturbances, induced by RF fields 10 V eff. EN 61000-4-8 Power frequency magnetic fields 30 A/m EN 55011/EN 55022/A1 Radiated disturbances class B

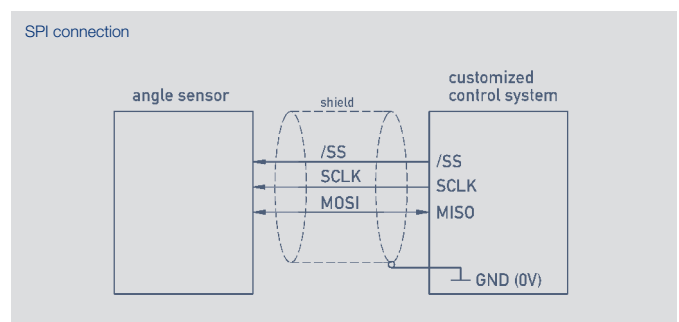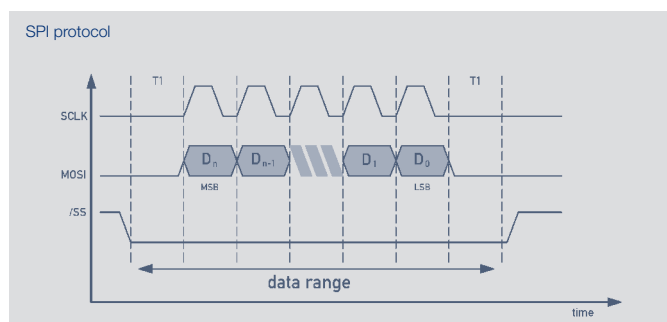

Connection assignment	
Signal	Cable Code 302
Supply voltage Ub	Green
GND	Brown
MOSI / MISO	Yellow
SCLK	Grey
/SS (slave select)	White



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position.

Technical Data




Type designations	RFC-48 _ _ - 214 - 6 _ _ - _ _ _ CANopen (available 3rd quarter 2015)	
Electrical Data		
Measured variables	Position and speed	
Measuring range	360	°
Measurement range speed	0 ... 25 000	min-1
Number of channels	1 / 2 see ordering specifications	
Output signal / protocol	CANopen protocol to CiA DS-301 V4.2.0, Device profile DS-406 V3.2 Encoder Class C2, LSS services to CiA DS-305 V1.1.2	
Programmable parameter	Position, speed, cams, working areas, rotating direction, scale, offset, node-ID, baud rate	
Node-ID	0 ... 127 (default 127)	
Baud rate	50 ... 1000 see ordering specifications	kBaud
Resolution across 360° (position)	14	Bit
Resolution speed	360/2 ¹⁴ ≈ 0,022	°/ms
Update rate	1	kHz
Independent linearity	0.5	±% FS
Repeatability	0.36	°
Hysteresis	0.36	°
Temperature error	0.2	±% FS
Supply voltage Ub	12/24 (8 ... 34)	VDC
Current consumption (w/o load)	< 100	mA
Reverse voltage	yes, supply lines	
Short circuit protection	yes, output vs.GND and supply voltage Ub (up to 40 VDC)	
Overvoltage protection	< 45 (permanent)	VDC
Insulation resistance (500 VDC)	≥ 10	MΩ
Cross-section cable	AWG 20, 0.5	mm²
Bus termination internal	120, optional, see ordering specifications	Ω
Environmental Data		
Operation temperature	-40 ... +105	°C
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	one channel: 71 / two channel: 58	years
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
EMC compatibility	ISO TR 10605 Packaging and Handling + Component Test: 8 kV ISO 11452-2 Radiated EM RF fields, Absorberhall: 100 V/m ISO 11452-5 Radiated EM RF fields, Stripline: 200 V/m CISPR 25 Radiated emission class 3 ISO 7637-2 pulse 1, 2a, 2b, 3a, 3b, 4 (24 V systems), 5: SG 5 ISO 7637-3 Transient transmission: SG 4	

Connection assignment

Signal	Cable Code 2 _ _	Connector M12 Code 511
Supply voltage Ub	White	Pin 2
GND	Brown	Pin 3
CAN_H	Yellow	Pin 4
CAN_L	Green	Pin 5
CAN Shield	Bare	Pin 1

Signal	Cable Code 432
Supply voltage Ub	White and Red
GND	Brown and Blue
CAN_H IN	Yellow
CAN_L IN	Green
CAN_H OUT	Pink
CAN_L OUT	Grey
Shield	Bare



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position.

Ordering specifications



Ordering specifications

Preferred types printed in bold:

- Delivery time up to 25 pcs. within 10 working days
- No low volume surcharge

Interface
6: CANopen Interface

Interface parameter

- 1: 1 x position, 1 x speed
- 2: 2 x position, 2 x speed
- 5: 1 x position, 1 x speed with bus termination 120 Ω
- 6: 2 x position, 2 x speed with bus termination 120 Ω

Baud rate

- 1: Baud rate 1000 kBaud
- 2: Baud rate 800 kBaud
- 3: Baud rate 500 kBaud
- 4: Baud rate 250 kBaud
- 5: Baud rate 125 kBaud
- 7: Baud rate 50 kBaud

Electrical connections

- 202: Cable 4-pol. 1.0 m, shielded
- 511: M12 connector 5-pin with cable (L = 0.15 m; shielded)
- Cable versions (f.e. CAN IN/OUT separately) and assembled connectors on request

R F C - 4 8 5 1 - 2 1 4 - 6 1 5 - 5 1 1

Series

- Mechanical version
- 4851: Elongated hole for easy adjustment
- 4852: Round hole mounting

Position marker

Z-RFC-P01

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation) or with locking pin (included in delivery). Not recommended for new designs

- magnet type 2
- max. permitted radial offset ± 1.5 mm
- packaging unit:
1 pc. P/N 005660
25 pcs. P/N 056079

Z-RFC-P02

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation) or with locking pin (included in delivery)

- magnet type 1
- max. permitted radial offset ± 3 mm
- packaging unit:
1 pc. P/N 005661
25 pcs. P/N 056080

Z-RFC-P07









Position marker for fixation with threaded pin M5 (included in delivery). Not recommended for new designs

- magnet type 2
- max. permitted radial offset ± 1.5 mm
- packaging unit:
1 pc. P/N 056069
25 pcs. P/N 056083


Z-RFC-P08

Position marker for fixation with threaded pin pin M5 (included in delivery)

- magnet type 1
- max. permitted radial offset ± 3 mm
- packaging unit:
1 pc. P/N 056070
25 pcs. P/N 056084

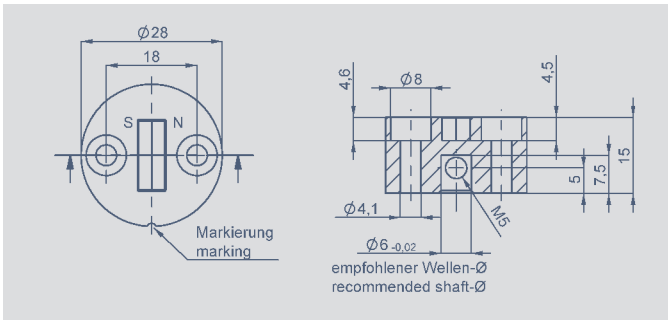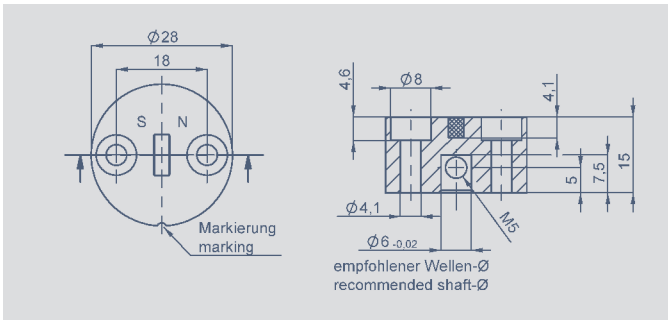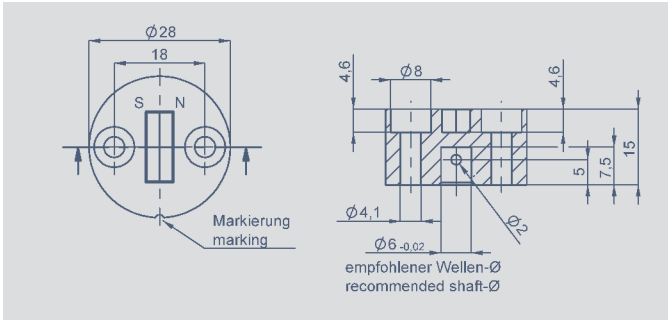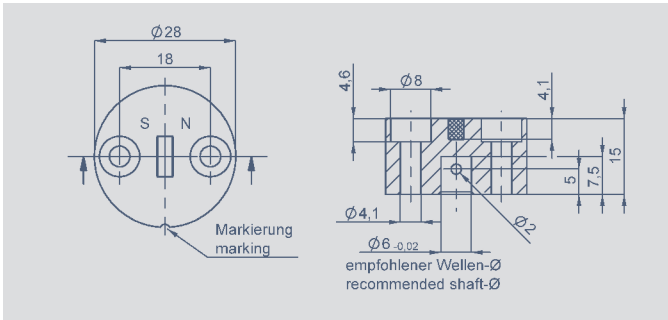


Position marker

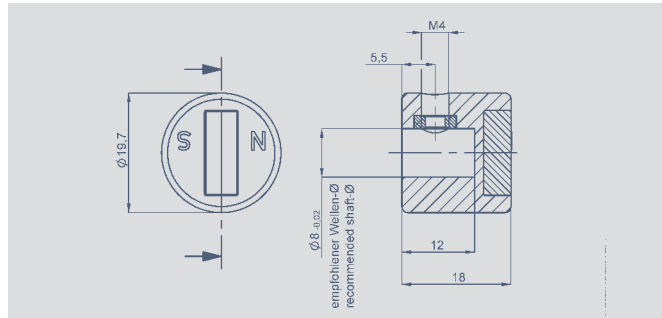

Z-RFC-P23

Position marker for fixation with threaded pin M4 (included in delivery)



- magnet type 1
- max. permitted radial offset ± 3 mm
- packaging unit:
1 pc. P/N 056074
25 pcs. P/N 056085

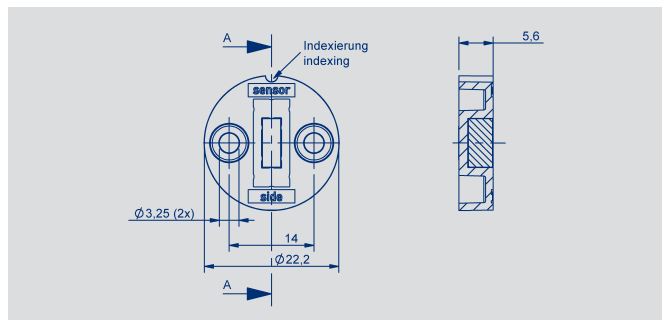

Z-RFC-P30

Position marker for frontal fixation with 2 fillister screws M3x8 (included in delivery)


- magnet type 2
- max. permitted radial offset ± 1.5 mm
- packaging unit:
1 pc. P/N 056086
25 pcs. P/N 056087

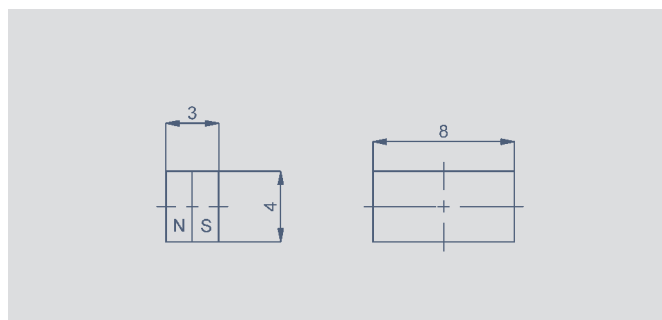

Z-RFC-P03

Magnet for direct application onto customer's shaft

- magnet type 2
- max. permitted radial offset ± 1.5 mm
- packaging unit:
1 pc. P/N 005658
50 pcs. P/N 056081

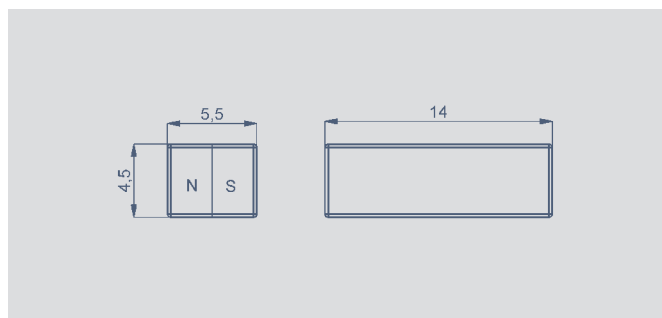

Z-RFC-P04

Magnet for direct application onto customer's shaft

- magnet type 1
- max. permitted radial offset ± 3 mm
- packaging unit:
1 pc. P/N 005659
50 pcs. P/N 056082


Position marker

Working distances (in mm)								
Sensor series	Z-RFC-...							
	P01	P02	P03	P04	P07	P08	P23	P30
Analog (voltage / current), SPI	0 ... 1.5	0 ... 4	0 ... 1.5	0 ... 4	0 ... 1.5	0 ... 4	0 ... 4	0 ... 1.5
SSI / incremental	-	0 ... 1.4	-	0 ... 1.4	-	0 ... 1.4	0 ... 1.4	-
CANopen single	-	2.3 ... 5	-	2.3 ... 5	-	2.3 ... 5	2.3 ... 5	-
CANopen redundant	-	1.9 ... 4.5	-	1.9 ... 4.5	-	1.9 ... 4.5	1.9 ... 4.5	-

Lateral magnet offset (will cause additional linearity error):


The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet type.

	Magnet Type 1			Magnet Type 2		
	0.5 mm	1 mm	2 mm	0.5 mm	1 mm	2 mm
Analog single	0.4	1.1	3.5	1.4	3.7	-
SPI	0.4	1.1	3.5	1.4	3.7	-
CANopen single	0.4	1.1	3.5	-	-	-
Analog redundant	0.7	1.8	5.2	2.5	6.4	-
CANopen redundant	0.7	1.8	5.2	-	-	-
SSI, incremental	0.4	0.7	2.2	-	-	-



Mounting instructions Z-RFC-P03 / Z-RFC-P04



- In general, we recommend mounting on not magnetizable materials, otherwise the stated working distances can change
- If the shaft is magnetizable please keep sufficient distance
- When the magnet is mounted in the shaft, the shaft may not be magnetizable
- If the magnet is axially fixed on a magnetizable shaft the working distances reduces by approximately 20 %

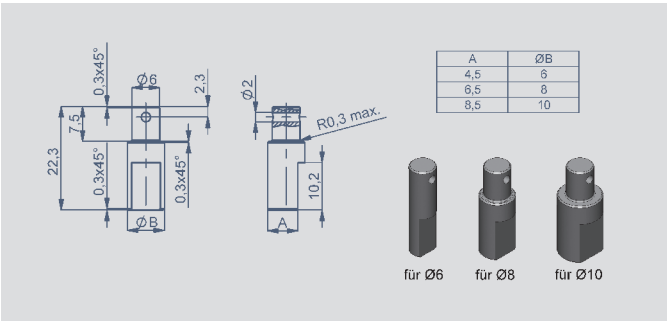

Z-RFC-S01 / Z-RFC-S02 / Z-RFC-S03
Shaft adapter for Z-RFC-P01 and Z-RFC-P02.
Fixation at position marker with locking pin

- Z-RFC-S01: Ø 6 mm, P/N 056206
- Z-RFC-S02: Ø 8 mm, P/N 056207
- Z-RFC-S03: Ø 10 mm, P/N 056208

Connector System
M12




Pin assignment

1 = Brown
2 = White
3 = Blue
4 = Black

IP67 UL

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Connector housing	Plastic PA	
Cable sheath	PUR; Ø = max. 6 mm, -25 °C...+80 °C (moved) -50 °C...+80 °C (fixed)	
Wires	PP, 0.34 mm²	
Length	Type	P/N
2 m	EEM 33-32	005600
5 m	EEM 33-62	005609
10 m	EEM 33-97	005650





Pin assignment

1 = Brown
2 = White
3 = Blue
4 = Black

IP67 UL

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67, open ended

Connector housing	Plastic PA	
Cable sheath	PUR; Ø = max. 6 mm, -40 °C...+85 °C	
Wires	PP, 0.34 mm²	
Length	Type	P/N
2 m	EEM 33-35	056135
5 m	EEM 33-36	056136
10 m	EEM 33-37	056137




Pin assignment

1 = White
2 = Brown
3 = Green
4 = Yellow
5 = grau
6 = rosa
7 = Blue
8 = Red

IP67 UL

M12x1 Mating female connector, 8-pin, straight, A-coded, with molded cable, not shielded, IP67, open ended

Connector housing	Plastic PA	
Cable sheath	PUR; Ø = max. 8 mm, -25 °C...+80 °C (moved) -50 °C...+80 °C (fixed)	
Wires	PP, 0.25 mm²	
Length	Type	P/N
2 m	EEM 33-86	005629
5 m	EEM 33-90	005635
10 m	EEM 33-92	005637




Pin assignment

IP67


M12x1 Mating female connector, 4-pin, straight, A-coded, with coupling nut, screw termination, IP67, not shielded

Connector housing	Plastic PBT -25 °C...+90 °C	
For wire gauge	6...8 mm, max. 0.75 mm²	
Type	EEM 33-88, P/N 005633	

Connector System
M12




Pin assignment




M12x1 Mating female connector, 5-pin, straight, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus

Connector housing	Metal -40 °C...+85 °C
For wire gauge	6...8 mm, max. 0.75 mm²
Type EEM 33-73, P/N 005645	




Pin assignment




M12x1 Mating female connector, 5-pin, angled, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus

Connector housing	Metal -40 °C...+85 °C
For wire gauge	6...8 mm, max. 0.75 mm²
Type EEM 33-75, P/N 005646	
It is possible to turn and fix the contact carrier in 90° positions.	




Pin assignment

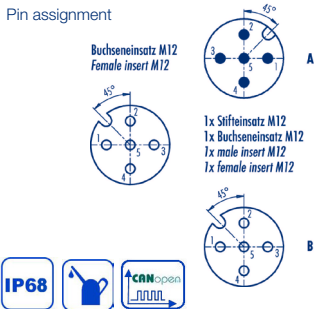

M12x1 splitter / T-connector, 5-pin, A-coded, IP68, 1:1 connection, female - male - female, CAN-Bus

Connector housing	PUR
Temperature range	-25 °C... +85 °C
Type EEM 33-45, P/N 056145	

Connector System
M12




Pin assignment

1 = n. c.
2 = n. c.
3 = n. c.
4 = Widerstand
5 = 120 Ω

M12x1 terminating resistor, 5-pin, A-coded, IP67, 120 Ω resistance, CAN-Bus

Connector housing	PUR
Temperature range	-25 °C... +85 °C
Type EEM 33-47, P/N 056147	

IP67



Pin assignment


1 = Shield
2 = Red (0,34 mm²)
3 = Black (0,34 mm²)
4 = White (0,25 mm²)
5 = Blue (0,25 mm²)

M12x1 Mating female connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded, open ended, CAN-Bus

Connector housing	PUR	
Cable sheath	PUR Ø = max. 7.2 mm, -25 °C...+85 °C (moved)	
Wiires	PP 2x 0.25 mm² + 2 x 0.34 mm²	
Length	Type	P/N
2 m	EEM 33-41	056141
5 m	EEM 33-42	056142
10 m	EEM 33-43	056143

IP67

UL



Pin assignment

1 = Shield
2 = Red (0,34 mm²)
3 = Black (0,34 mm²)
4 = White (0,25 mm²)
5 = Blue (0,25 mm²)

M12x1 Mating female connector, 5-pin, straight, A-coded, with molded cable, IP68, CAN-Bus

Connector housing	PUR	
Cable sheath	PUR; Ø 7.2 mm -25 °C... +85 °C (fixed)	
Length	Type	P/N
5 m	EEM 33-44	056144

IP68

UL

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

CAN-bus

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants und lubricants

UL


UL - approved

Suited for applications in dragchains

Note: The protection class is valid only in locked position with its plugs. The application of these products in harsh environments must be checked in particular cases.

Multifunctional Measuring Device with Display

Series MAP4000



Special features

- Supply voltage 10...30 VDC, 80...250 V DC or AC
- high accuracy
- direct connection of potentiometric and standardized signals
- adjustable supply voltage for sensors 5... 24 V
- Temperature coefficient 100 ppm/K
- optional RS 232, RS 485, analog output, limited switch

Ordering specifications

Number comparator relays

- 0: none
- 2: 2 relays
- 4: 4 relays

Analog output

0: no analog output
1: analog output present

Interface

- 0: ni interface
- 1: RS 232
- 2: RS 485

M A P - 4 0 1 0 - 0 0 0 - 1 0 1

Display colour

1: Red

Data storage (only with interface)

- 0: not storage
- 1: RTC storage
- 2: FAST storage

Series

Supply voltage

00: 10...30 V AC/DC
10: 80...250 V AC

Adjustable Excitation voltage (5...24 V/Max. 1,2 W)

1: Excitation present

Connecting options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pol. versions
- Protection class IP68
- Ordering codes of standard versions
see ordering specifications



Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pol. versions
- Protection class IP67
- on request



Deutsch DTM 04

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pol. versions
- Protection class IP67
- on request



ITT Cannon Sure Seal connector

- customized lengths
- 3-, 4- and 6-pol. versions
- protection class IP67
- on request


Novotechnik
Messwertaufnehmer OHG

Postfach 4220
73745 Ostfildern (Ruit)
Horbstraße 12
73760 Ostfildern (Ruit)

Telefon +49 711 4489-0
Telefax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© 06/2015
Änderungen vorbehalten.
Printed in Germany.



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pol. versions
- on request



Molex Mini Fit

- Customized length and lead wires
- 3-, 4-, 6- and 8-pol. versions
- on request

