

NAVIGATOR CLASS - PRINTED CIRCUIT MOUNT, LOW PROFILE POWER TRANSFORMER

1. Electrical Specifications
- A. Maximum Power: 24VA



B. Input Voltage and Frequency: 115/230V, 50/60Hz

C. Voltage Regulation: 16% TYP @ full load to no load

D. Temperature Rise: 35°C TYP

E. Insulation Resistance: < 1MEG ohm

F. Hi-Pot: 2500Vrms 1 minute @ Pri to Sec
2500Vrms 1 minute @ Pri to Core
1500Vrms 1 minute @ Sec to Core
2. Marking: Ensign Corp, part number (see table), date code, country, terminal number
3. Safety:
UL/cUL 5085-2 Recognized (File 47299)
UL 1446 Recognized Insulation System (File 95662)

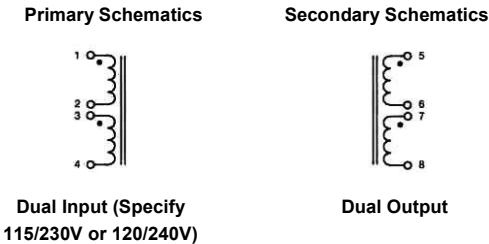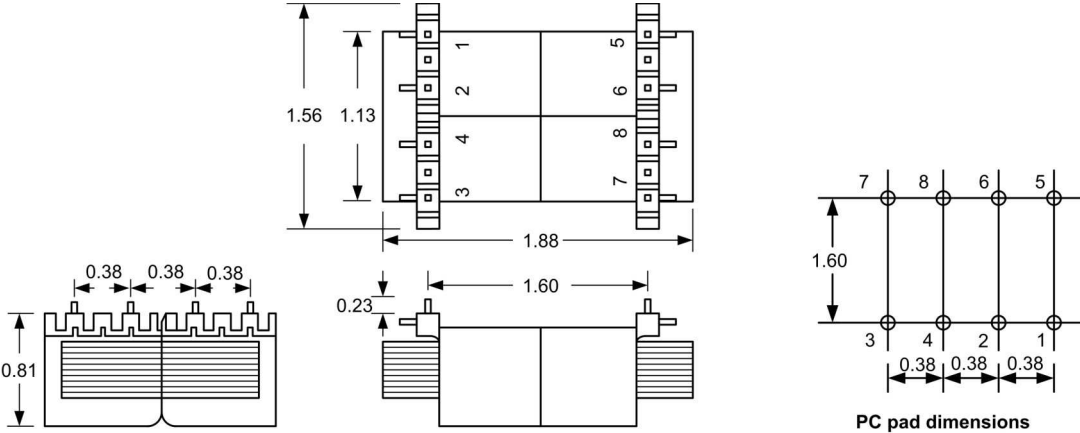

Part Number	Series Connection	Parallel Connection
115/230V		
U024-2-010X	10VCT @ 2.4A	5V @ 4.8A
U024-2-012X	12.6VCT @ 1.90A	6.3V @ 3.8A
U024-2-016X	16VCT @ 1.5A	8V @ 3.0A
U024-2-020X	20VCT @ 1.2A	10V @ 2.4A
U024-2-024X	24VCT @ 1.0A	12V @ 2.0A
U024-2-030X	30VCT @ 800mA	15V @ 1.6A
U024-2-034X	34VCT @ 700mA	17V @ 1.4A
U024-2-040X	40VCT @ 600mA	20V @ 1.2A
U024-2-056X	56VCT @ 425mA	28V @ 850mA

	POWER TRANSFORMER NAVIGATOR CLASS	U024-2-XXXX	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	Ensign Corporation 201 ENSIGN RD., BELLEVUE, IA 52031	Dim: Inches	Sheet 1 of 1
PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH ENSIGN RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING			