

## ARF461 SERIES

### EMI FILTER HYBRID / HIGH RELIABILITY


#### Description

The ARF Series EMI filter has been designed to provide full compliance with the input line reflected ripple current requirement specified by CE03 of MIL-STD-461C over the full military temperature range while operating in conjunction with the corresponding ART and ARH series of DC/DC converters. These filters are offered as part of a family of high reliability conversion products providing single, dual and triple output voltages while operating from nominal +28 volt input line. Other converters operating with a similar switching frequency will also benefit by use of this device.

These EMI filters are hermetically packaged in a seam welded enclosure utilizing axially oriented copper-core pins which minimize resistive DC losses. This package has been configured to complement the ART and ARH package as a convenience in system installation and is fabricated with International Rectifier's rugged ceramic lead-to-package seal assuring long term hermetic seal integrity in harsh environments.

Designed to meet the the derating requirements of MIL-STD-975 and manufactured in a facility fully qualified to MIL-PRF-38534, these converters are available in two screening grades. The flight grade is designed, screened and processed for space as specified in MIL-PRF-38534. The HB grade is processed and screened to the class H requirement, but does not include element evaluation. Both grades are tested to meet the complete group "A" test specification over the full military temperature range with no derating.

#### Typical Connection Diagram

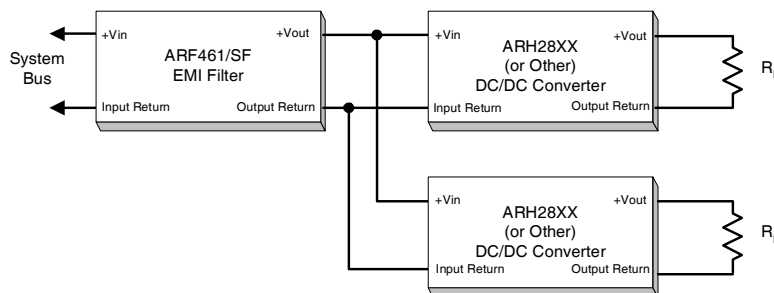

#### Features

- Up to 3.0 Ampere Output Current
- Attenuation > 40dB @ 100 KHz
- Low Profile Seam Welded Package
- Ceramic Feedthru Copper-Core Pins
- Operation Over Full Military Temp. Range
- No Derating for -55°C to +125°C Operation

Variations in electrical, mechanical and screen requirements can be accommodated. Contact IR Santa Clara for special requirements.

## Specifications

Absolute Maximum Ratings <small>Note 1</small>	
Input Voltage range	-80 V to +80V <small>Note 2</small>
Input Current	5.0A
Lead soldering temperature	300°C for 10 seconds
Operating case temperature	-55°C to +125°C
Storage temperature	-55°C to +135°C


Electrical Characteristics -55°C ≤ T<sub>CASE</sub> ≤ +125°C, -50 ≤ V<sub>IN</sub> ≤ +50 unless otherwise specified

Parameter	Group A Subgroups	Test Conditions	Min	Nom	Max	Unit
INPUT VOLTAGE		Steady State Transient <small>Note 2</small>	-50 -80		+50 +80	V <sub>DC</sub>
OUTPUT VOLTAGE	1, 2, 3	V <sub>OUT</sub> = V <sub>IN</sub> - I <sub>IN</sub> (R <sub>DC</sub> )				V <sub>DC</sub>
OUTPUT CURRENT <small>Note 3</small>					4.0	A <sub>DC</sub>
DC RESISTANCE <small>Note 4</small>	1	T <sub>C</sub> = 25°C			240	mΩ
POWER DISSIPATION		Maximum Current T <sub>C</sub> = 25°C			3.84	W
NOISE REDUCTION		150 KHz - 50 MHz	40			dB
ISOLATION	1	Any Pin to Case Tested @ 500VDC	100			MΩ
CAPACITANCE		Measured Between Any Pin and Case		40		nF
DEVICE WEIGHT		Slight Variations with Case Style		95		g


## Notes to Specifications

- Operation above maximum ratings may cause permanent damage to the device. Operation at maximum ratings may degrade performance and affect reliability.
- Device can tolerate ± 100 Volt transient whose duration is ≤ 100 ms when R<sub>s</sub> ≥ 0.5 Ω.
- Derate Output Current linearly from 100% at 125°C to 0 at 135°C.
- DC resistance is the total resistance of the device and includes the sum of the *input to output* resistance and the *return in to return out* resistance paths.

### Mechanical Outline

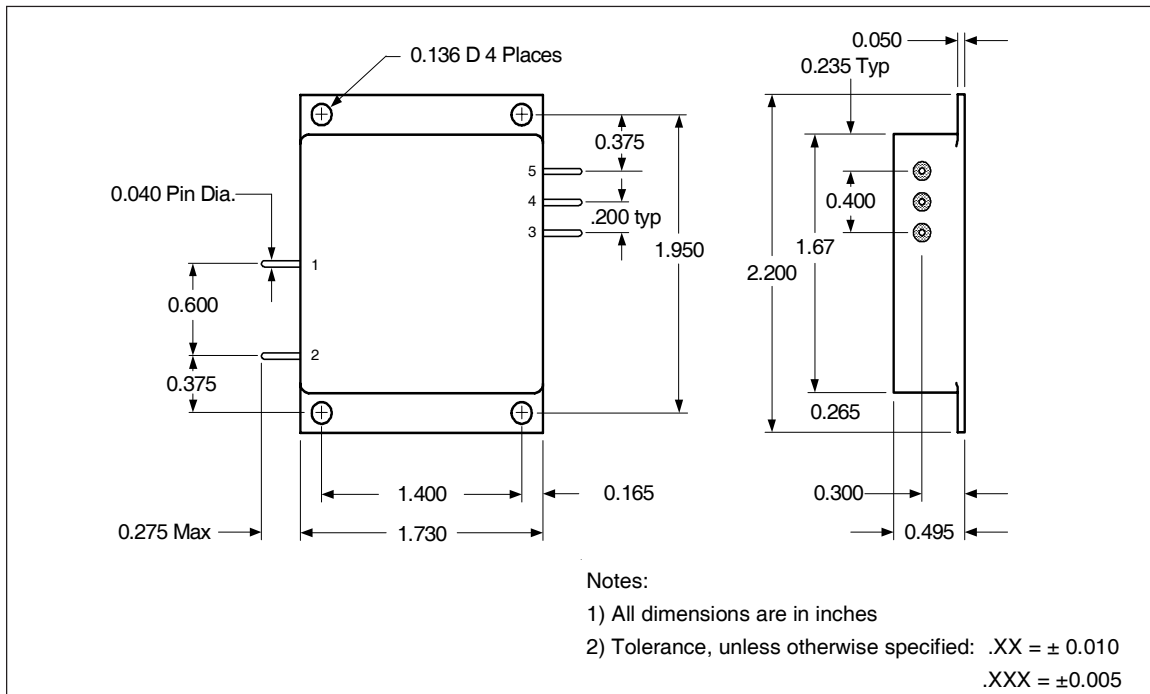

### Block Diagram

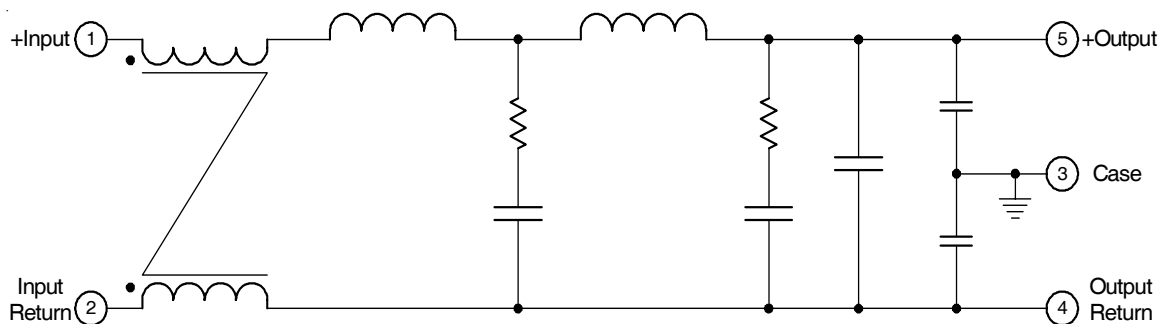

### Pin Designation

Pin #	Designation
1	+ Input
2	Input Return
3	Case Ground
4	Output Return
5	+ Output
Note: Input and output returns are internally connected	

## ARF461 Series


International  
**IR** Rectifier

### Device Screening

Requirement	MIL-STD-883 Method	No Suffix	EM
Temperature Range	—	-55°C to +125°C	-55°C to +125°C
Element Evaluation	—	MIL-PRF-38534	—
Internal Visual	2017	—	—
Temperature Cycle	1010	Cond C	Cond C
Constant Acceleration	2001	3000g	500g
PIND	2020	Cond A	—
Burn-In Interim Electrical @ 160 hrs	1015	320 hrs@ 125°C ( 2 x 160 hrs )	160 hrs@ 125°C
Final Electrical ( Group A ) Read & Record Data	MIL-PRF-38534 & Specification	-55°C, +25°C, +125°C	-55°C, +25°C, +125°C
PDA ( 25°C, interim to final )	—	2%	—
Radiographic Inspection	2012	—	—
Seal, Fine and Gross	1014	Cond A, C	Cond A, C
External Visual	2009	—	—

International Rectifier currently does not have a DSCC certified Radiation Hardness Assurance Program

### Part Numbering

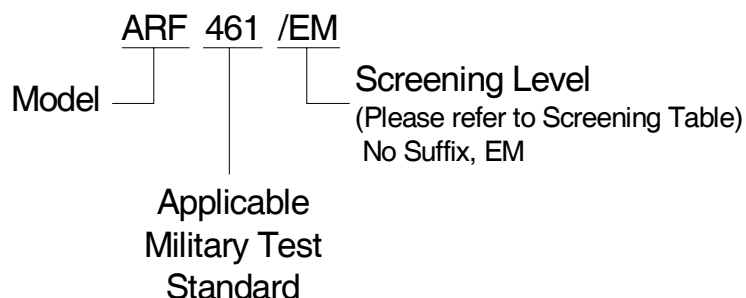

International  
**IR** Rectifier

**WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331

**IR SANTA CLARA:** 2270 Martin Av., Santa Clara, California 95050, Tel: (408) 727-0500

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.

*Data and specifications subject to change without notice. 07/2006*