


PART NO. SEE CHART
Dwg. NO. SD-92316-001

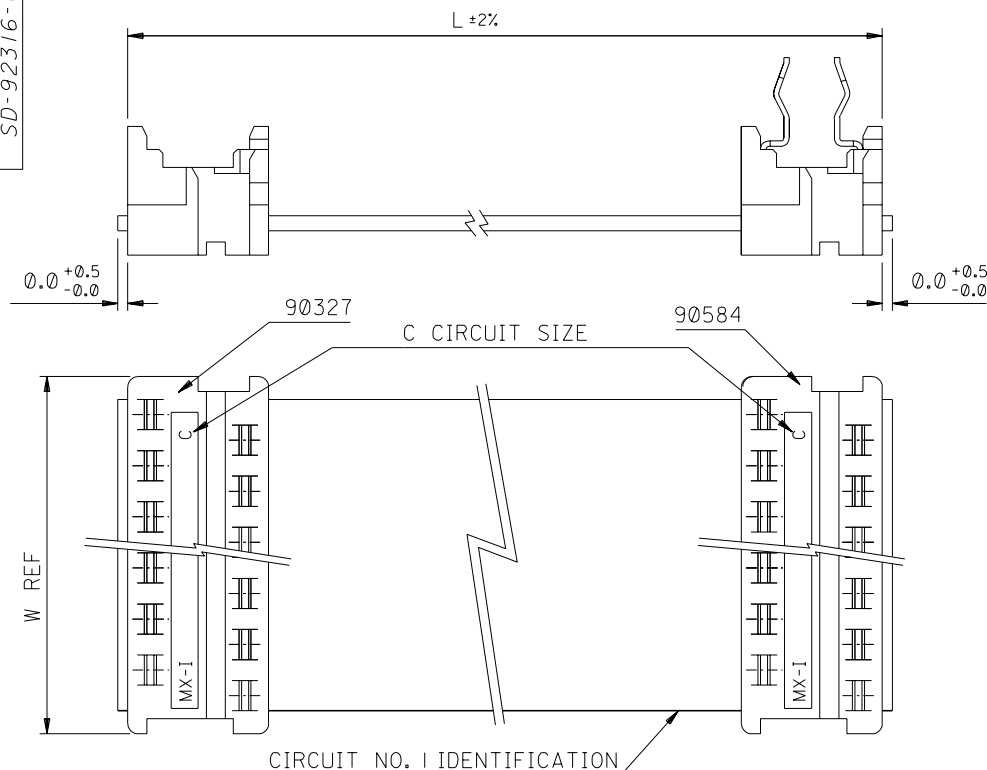

ORDERING INFORMATION

92316-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM

e.g. 92316-1208 = 12 CIRCUIT
WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
100 CM , THE PART NO. IS 92316-***01
105 CM , THE PART NO. IS 92316-***02
110 CM , THE PART NO. IS 92316-***03
115 CM , THE PART NO. IS 92316-***04
120 CM , THE PART NO. IS 92316-***05

90327 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

90584 CONNECTOR

CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

NOTES:

1. SEE PRODUCT SPECIFICATIONS PS-99020-0011.
2. SEE TERMINATION SPECIFICATION ES-99033-0001.
3. SEE TERMINATION SPECIFICATION ES-99033-0002.
4. SEE CABLE SPECIFICATION ES-99027-0006.
5. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR SHORTS AND DISCONTINUITIES.

REF DIM ADDED EC NO. 2003-0374 DRAWN: P.FINN 02/10/21 CHK: / / / APP: / / /	QUALITY SYMBOLS MAJOR CRITICAL	DESCRIPTION REV	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4 : 1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☐ INCH ☒ mm ONLY	SHT	REV		
			4 PLACES ±0. ±.	DRAWN BY & DATE MCURRAN 98/06/19	TITLE: PICO FLEX IDT TO BOARD-IN STANDARD ASSEMBLIES							
			3 PLACES ±0. ±.	CHECKED BY & DATE AMCANN 98/06/19	MATERIAL NO.			DRAWING NO.	SHEET NO.			
			2 PLACES ±0. ±.	APPROVED BY & DATE MWILHITE 98/06/19	SD-92316-001			1 OF 1				
ANGULAR: ± 1/2 °			CAD FILENAME S92316X1.DGN		SEE CHART							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.								SIZE B	