
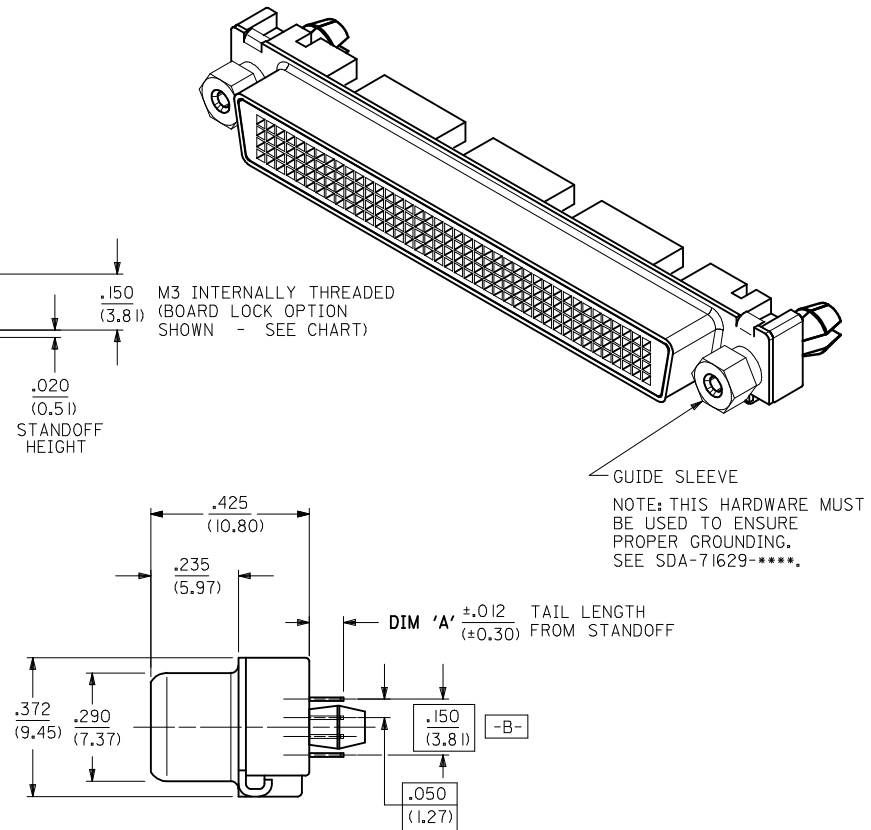


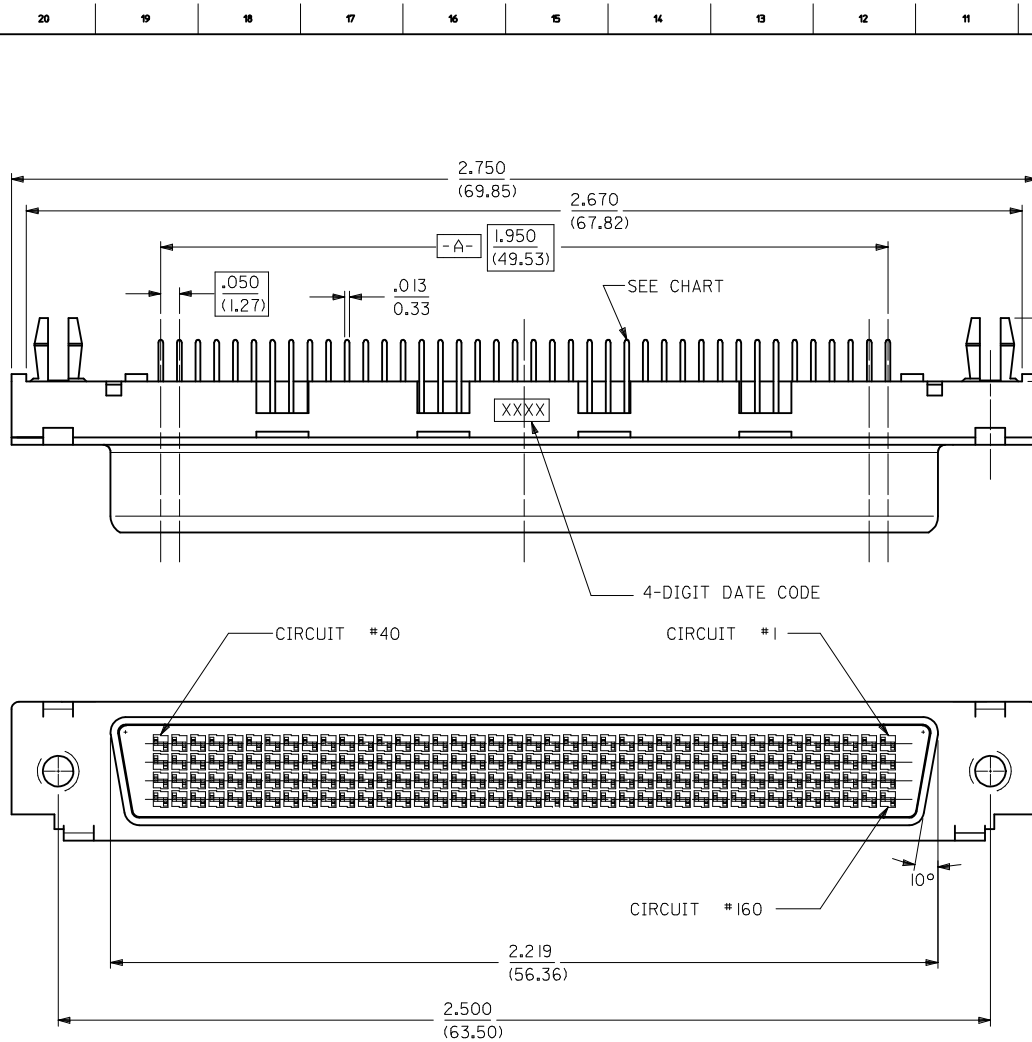

		OPTIONS			PACKAGING SPEC.	TRUE-POSITION
ENG. NUMBER	ITEM NUMBER	DIM 'A'	M3 INSERT	BOARDLOCK		
A-71626-1000	051-24-1030	.092/(2.34)	YES	NO	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1001	71626-1001	.092/(2.34)	YES	YES	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1002	71626-1002	.092/(2.34)	NO	NO	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1003	71626-1003	.125/(3.18)	YES	NO	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1004	71626-1004	.125/(3.18)	YES	YES	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1005	71626-1005	.125/(3.18)	NO	NO	PK-70873-297	⌀ .005/(.13) (M) A B
A-71626-1006	71626-1006	.177/(4.49)	YES	NO	PK-70873-1005	⌀ .020/(.51) (M) A B
A-71626-1007	71626-1007	.210/(5.33)	YES	NO	PK-70873-1005	⌀ .020/(.51) (M) A B

SEE SHEET 2 EC NO: UCP2010-0117 G DRWNS/DANIELLEY 2009/07/23 CHYK/MORGAN 2009/07/24 APPR:SMILLER 2009/07/24 REV DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	▽=0 ▽=0			DRAWN BY	DATE	TITLE		
		mm	INCH	MOS	1994/08/29	.050 PITCH LFH 160 CKT		
		4 PLACES	±---	CHECKED BY	DATE	VERTICAL I/O FEMALE		
		3 PLACES	±---	GF	1994/08/29	SALES ASSEMBLY		
		2 PLACES	±---	APPROVED BY	DATE	MOLEX INCORPORATED		
		1 PLACE	±---	GF	1994/08/29	MOLEX INCORPORATED		
		ANGULAR ± 1/2°		MATERIAL NO.		DOCUMENT NO.	SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SDA-71626-1****		1 OF 2
				SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

1) MATERIALS:

HOUSING: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, BLACK.
MOLDED STICK: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, BLACK.
FEMALE CONTACT: HIGH PERFORMANCE COPPER ALLOY
OUTER SHELL: LOW CARBON STEEL.
THREADED BOARD LOCK: BRASS.

2) PLATING :

CONTACT: 30 microinches / 0.76 micrometer MIN. GOLD IN SELECTIVE AREA,
100 microinches / 2.54 micrometers MIN. TIN SELECTIVE AREA,
OVER NICKEL UNDERPLATE OVERALL.



OUTER SHELL: 100 microinches / 2.54 micrometers MINIMUM BRIGHT NICKEL;
OVER COPPER FLASH (OPTIONAL).

BOARDLOCK: 150 microinches / 3.81 micrometers MINIMUM BRIGHT TIN,
NICKEL UNDERPLATE.

3) THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71626.

4) PART COMPLIES WITH CLASS B OF COSMETIC SPECIFICATION PS-45499-002.

5) PARTS PACKAGED PER PK-70873-0299.

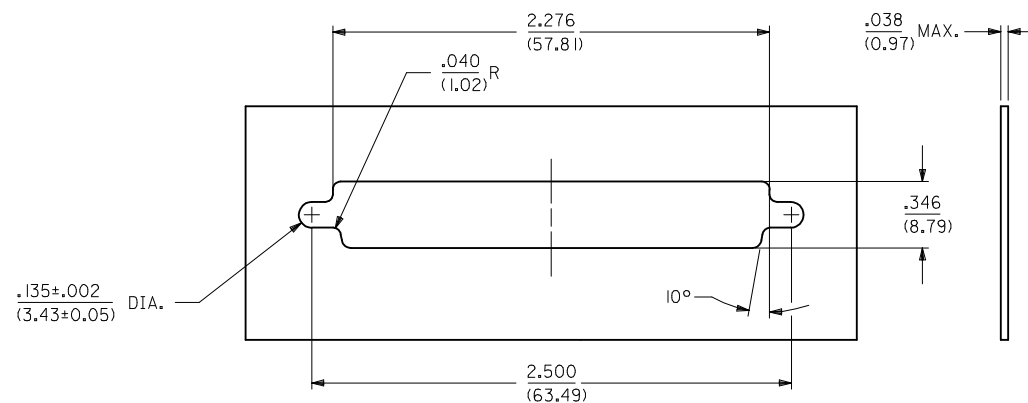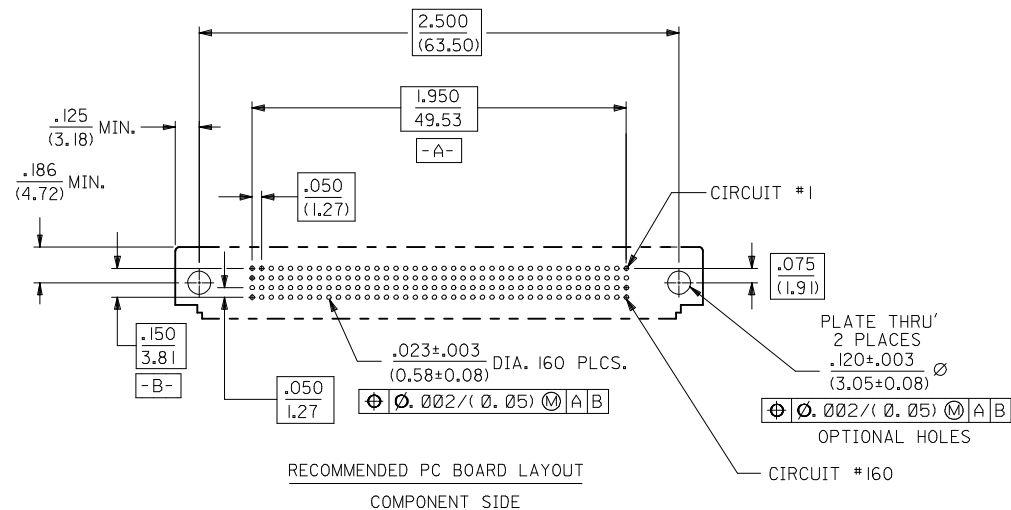

PANEL CUT-OUT DIMENSIONS
ALL TOLERANCES $\pm .003/(0.08)$
UNLESS OTHERWISE STATED.

REVISE NOTES EC NO.: UCP2010-017 G CHYKQD:MORGAN 2009/07/24 CHYKQD:DORJAN 2009/07/24 APPR:SHILLER 2009/07/24	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		=0 =0		mm	INCH	DRAWN BY	DATE	TITLE		
			4 PLACES	+---	+---	MOS	1994/08/29	.050 PITCH LFH 160 CKT VERTICAL I/O FEMALE SALES ASSEMBLY MOLEX INCORPORATED		
			3 PLACES	+---	+---	CHECKED BY	DATE			
			2 PLACES	+---	+---	GF	1994/08/29			
			1 PLACE	+---	+---	APPROVED BY	DATE			
					GF	1994/08/29				
				ANGULAR ±1/2°		MATERIAL NO.	DOCUMENT NO.	SHEET NO.		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SDA-71626-1****	2 OF 2	
			REV	SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						