




(B) SPECIFICATIONS:

- MATERIAL:
 - BODY: PA66 (UL 94V-0).
 - PIN: BRASS.
 - COVER: PBT (UL 94V-0).
- ELECTRICAL RATING: 300V, 15A.
- DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
- BREAKDOWN VOLTAGE: 4000V.
- INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
- OPERATING TEMPERATURE: -40°C TO +105°C.
- NUMBER OF CIRCUIT POSITIONS AVAILABLE= 4
THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
- ALL COMPONENTS ARE ROHS COMPLIANT.

REVISED/VOID #’S EC NO: ET2007-0020 DRAWN: C YORK 2006/07/25 CHKD: JPAWLICKI 2006/07/25 APPR: JPAWLICKI 2006/07/26			DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		mm			INCH	DRAWN BY DATE		5.08MM, EURO DUAL HEADER HORIZONTAL, OPEN END, STACKABLE					
		4 PLACES			± ---	± ---	L. ROTHMAUS 2005/12/06						
		3 PLACES			± ---	± .005	CHECKED BY DATE		MOLEX INCORPORATED				
		2 PLACES			± 0.13	± .01	C. YORK 2006/01/06						
		1 PLACE			± 0.3	± ---	APPROVED BY DATE		SD-39538-001				
		ANGULAR ± 2 °			J. PAWLICKI 2006/01/10								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
					SEE SHEET 2		SD-39538-001		1 OF 2				
					SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

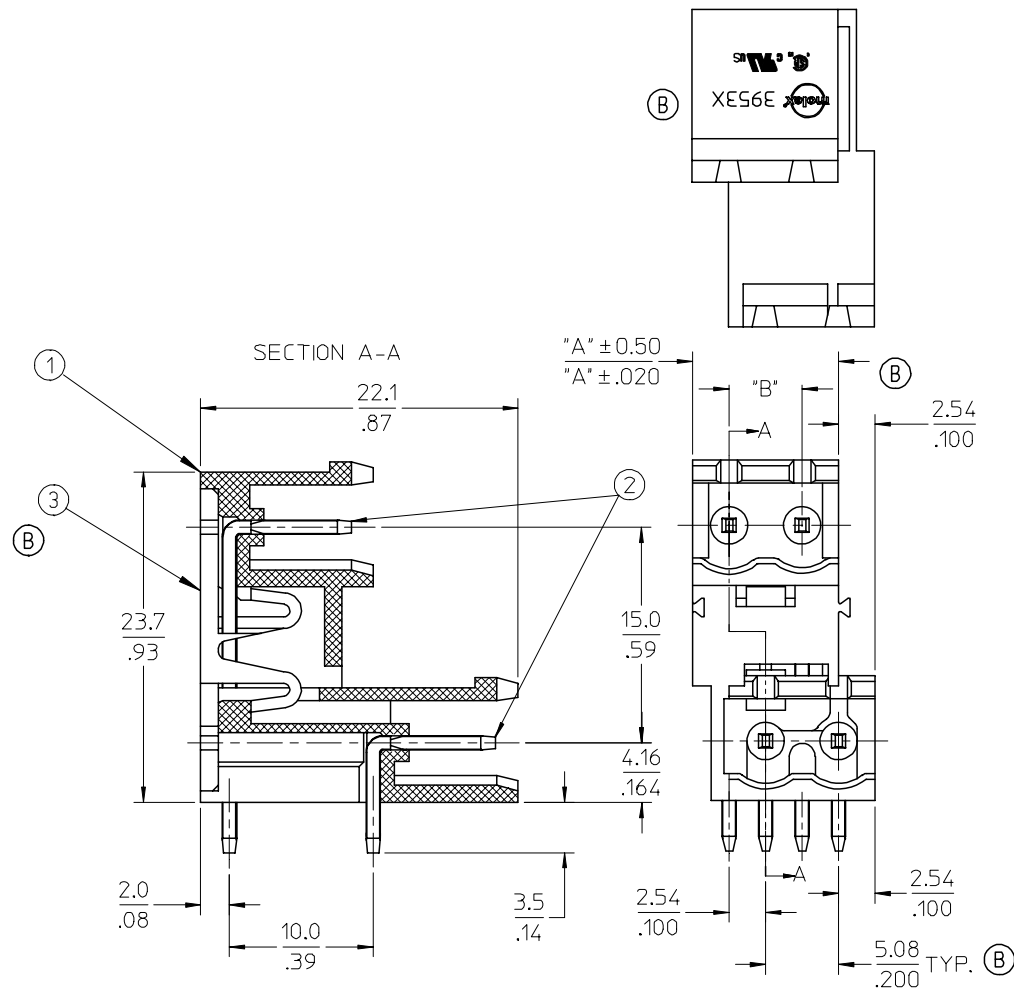