




NOTES:
SPECIFICATIONS:
1. Material:
(1). Screw: C1010,
(2). Body: PA66
(3). Terminal: Brass
(4). Cage: Brass
2. Wire range: 24 - 16AWG.
3. Electrical rating: 300V, 10A.
4. MAX TORQUE: 3.5 in-lbs.
5. Wire strip length: 5.5mm.
6. Dielectric withstands: AC2500V for 1 minute.
7. Breakdown voltage: 4000v(12/50us), 5 times.
8. Insulation resistance: DC500V, 1000M.
9. Operating temperature: -40C to +105C.
10. A = N x P.
11. B = (N - 1) x P
12. P = (Pitch) = 5.00MM (.197").
13. N = Number of positions available 2 through 24.

ENTER DESCRIPTION EC NO: NEO2006-0310 DRWN: LROTHAUS 2006/01/09 CHKD: CYORK 2006/01/09 APPR: JPAWLICK 2006/01/10 A	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		▽=0			DRAWN BY	DATE	5.0MM, EURO TERM BLOCK RIGHT ANGLE, PC MOUNT STACKABLE, STAMPED TERM		
		◇=0			CHECKED BY	DATE			
				C. YORK	01/06/06				
				APPROVED BY	DATE	MOLEX MOLEX INCORPORATED			
				ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.	SHEET NO.
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-39543-006	1 OF 1
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

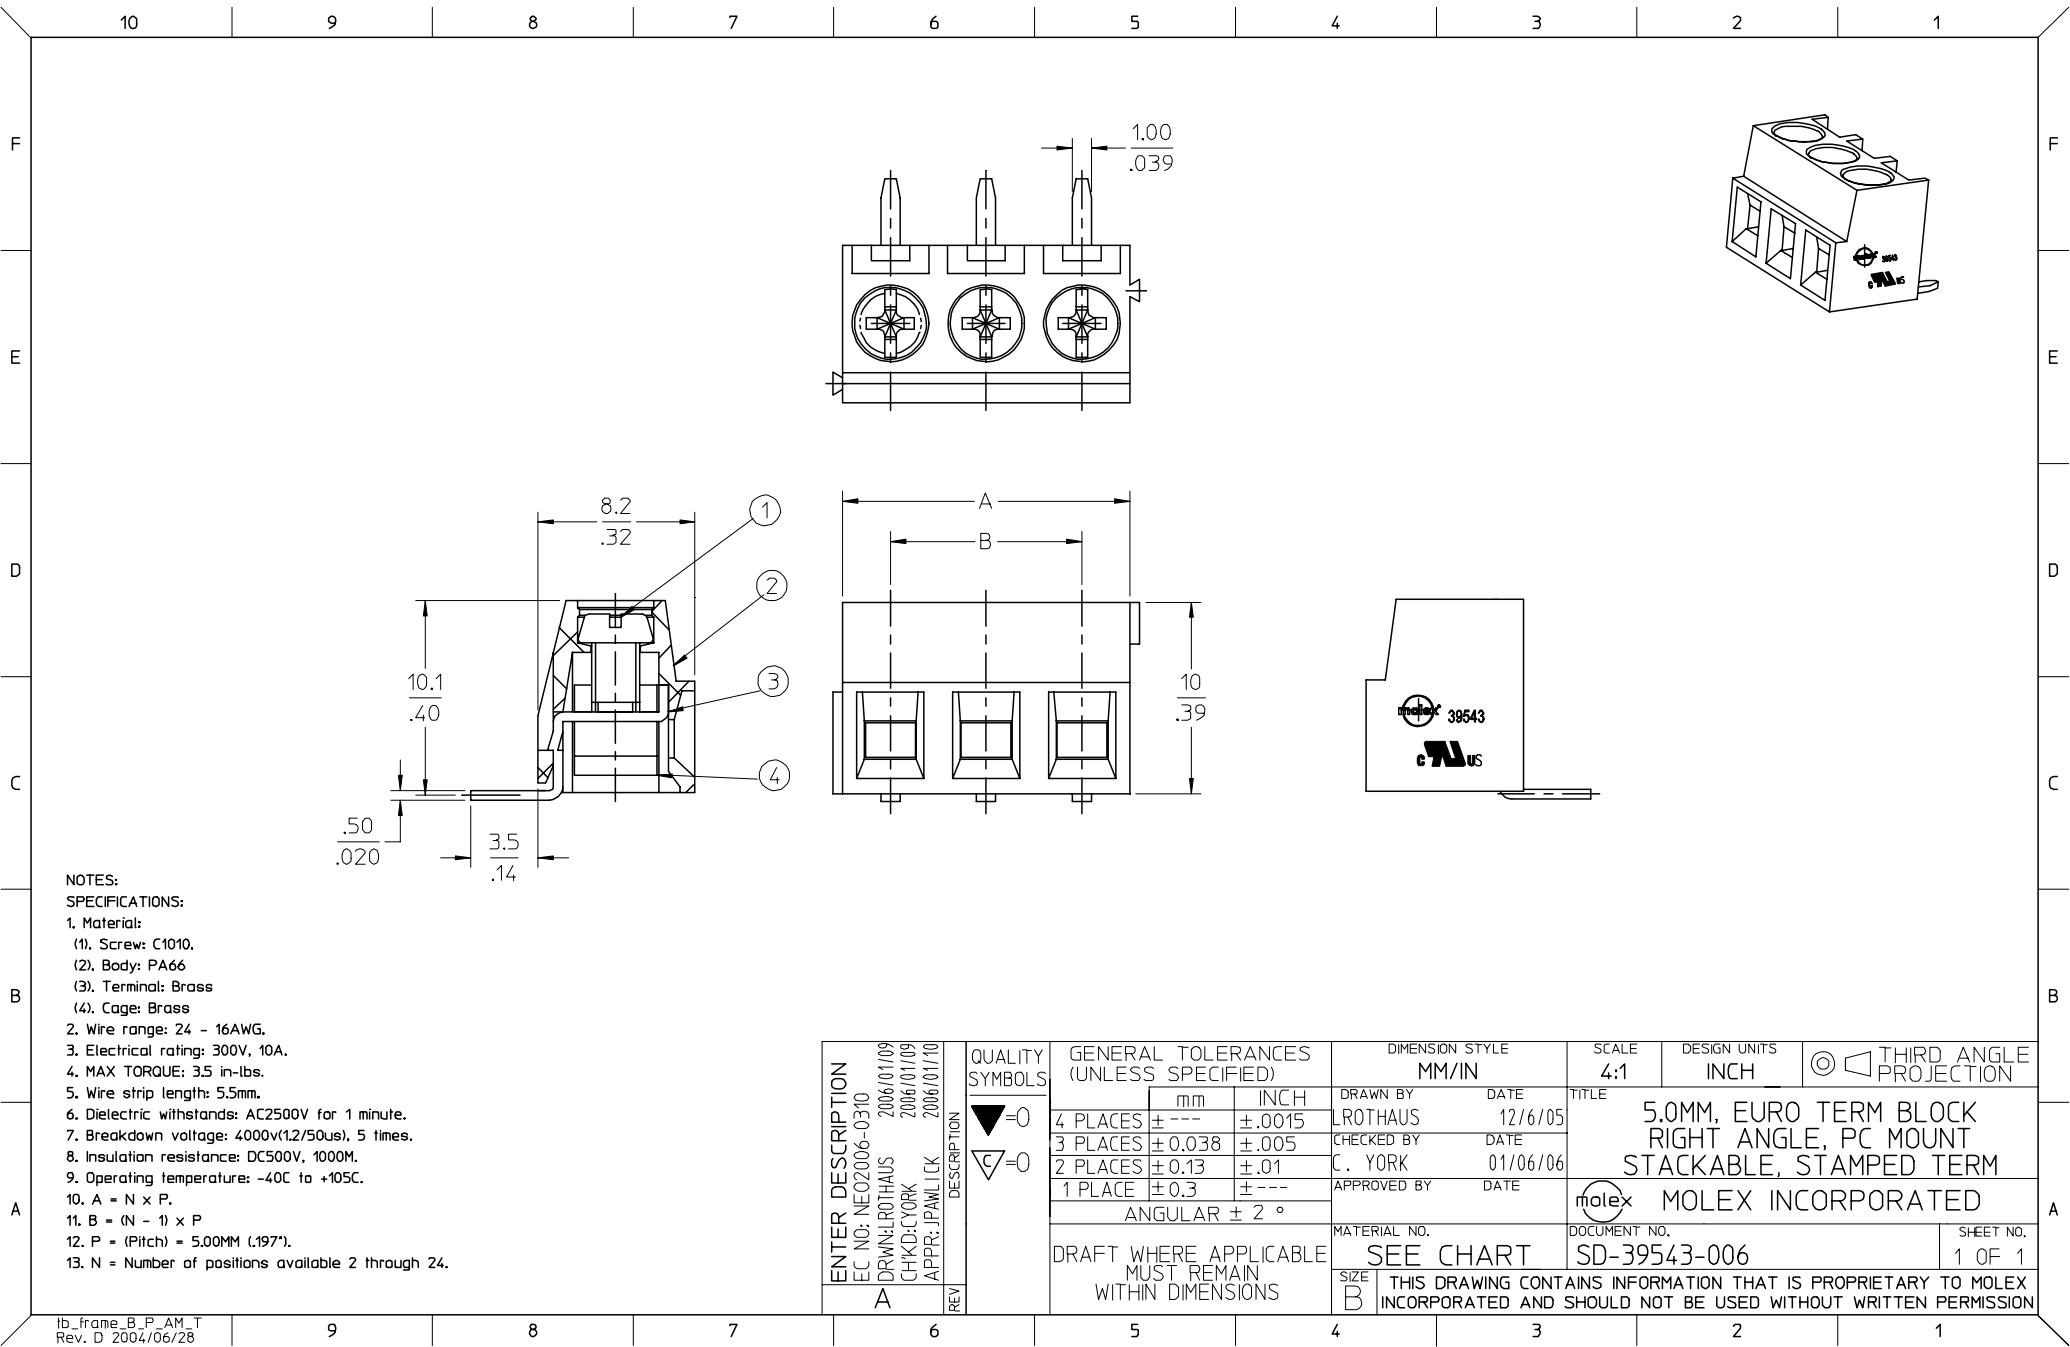