


SEE CHARTS FOR "A" DIMENSION


(THE "A" DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

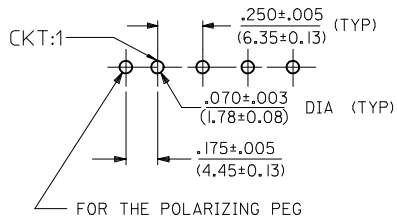

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

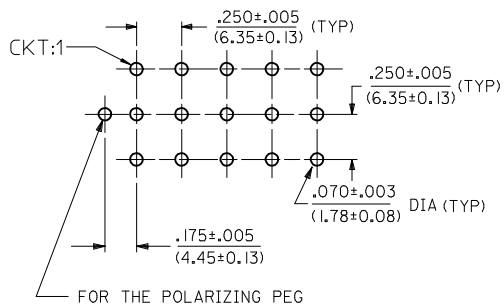

NOTES:

- MATERIAL CODES:
 - *A* = UNREINFORCED POLYESTER (PBT), UL94V-0, COLOR: NATURAL(WHITE)
 - *C* = NYLON (PA66), UL94V-2, COLOUR: NATURAL (TRANSLUCENT)
 - *D* = NYLON (PA66), UL94V-2, COLOUR: BLACK
- PLATING CODES: A = ES-88-P921
140 μ m(3.5 μ) MIN 240 μ m(6 μ) MAX OVERALL TIN HOT-DIPPED
- TERMINAL LENGTH CODES:
 - 1 = TERMINAL FOR .062(1.57) THICK PC BOARD
- DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE
- HEADER ASSEMBLY HOUSING MATE WITH:
 - PLUG HOUSINGS, .084(2.13)DIA, SERIES 42021
- CONTACTS ARE ON .250(6.35) GRID CENTERLINE SPACING
- REFER PACKAGING SPECIFICATION
 - PK-43255-001 FOR 2,3 & 4 CIRCUIT
 - PK-43255-003 FOR 6,9,12 & 15 CIRCUIT
 - PK-36518-292 FOR PART# 367660001, 367660002 & 367660003

RoHS COMPLIANT

REMOVED SERIES 36757 EC NO: 12016-0100 DFW:SS06 CHKD: APPR: SHMARG REV: E4	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY SUDHIR	DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(2.13) SERIES COMPLIANT-POLARIZING PEG		
		4 PLACES ± ---	± ---	± 0.005	CHECKED BY GJLOWE	DATE 2004/06/08			
		3 PLACES ± ---	± 0.13	± 0.01	APPROVED BY GJLOWE	DATE 2004/06/08			
ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

