


10	9	8	7	6	5	4	3	2	19200	
MATERIAL NUMBER	ENGINEERING NUMBER	WIRE SIZE	INSULATION COLOR	MWID 	"C"	"E" MAX	"L" MAX	PACKAGING	"H" NOMINAL	
192000002	AS-845	22-18	DARK RED	Ø .138/3.50	Ø .056/1.42	Ø .20/5.1	1.26/32.0 	LOOSE PC	-	
192000022	AS-845T		PINK					PART ON TAPE	.48/12.1	
192000025 	AS-845 PINK							LOOSE PC	-	
192000026 	AS-845T PINK		PART ON TAPE					.48/12.1		
192000001	BS-831	16-14	BLUE	Ø .169/4.29	Ø .086/2.18	Ø .23/5.8	1.26/32.0 	LOOSE PC	-	
192000023	BS-831T							PART ON TAPE	.49/12.4	
192000003	CS-846	12-10	YELLOW	Ø .230/5.84	Ø .138/3.50	Ø .30/7.6	1.62/41.1 	LOOSE PC	-	
192000024	CS-846T							PART ON TAPE	.48/12.3	

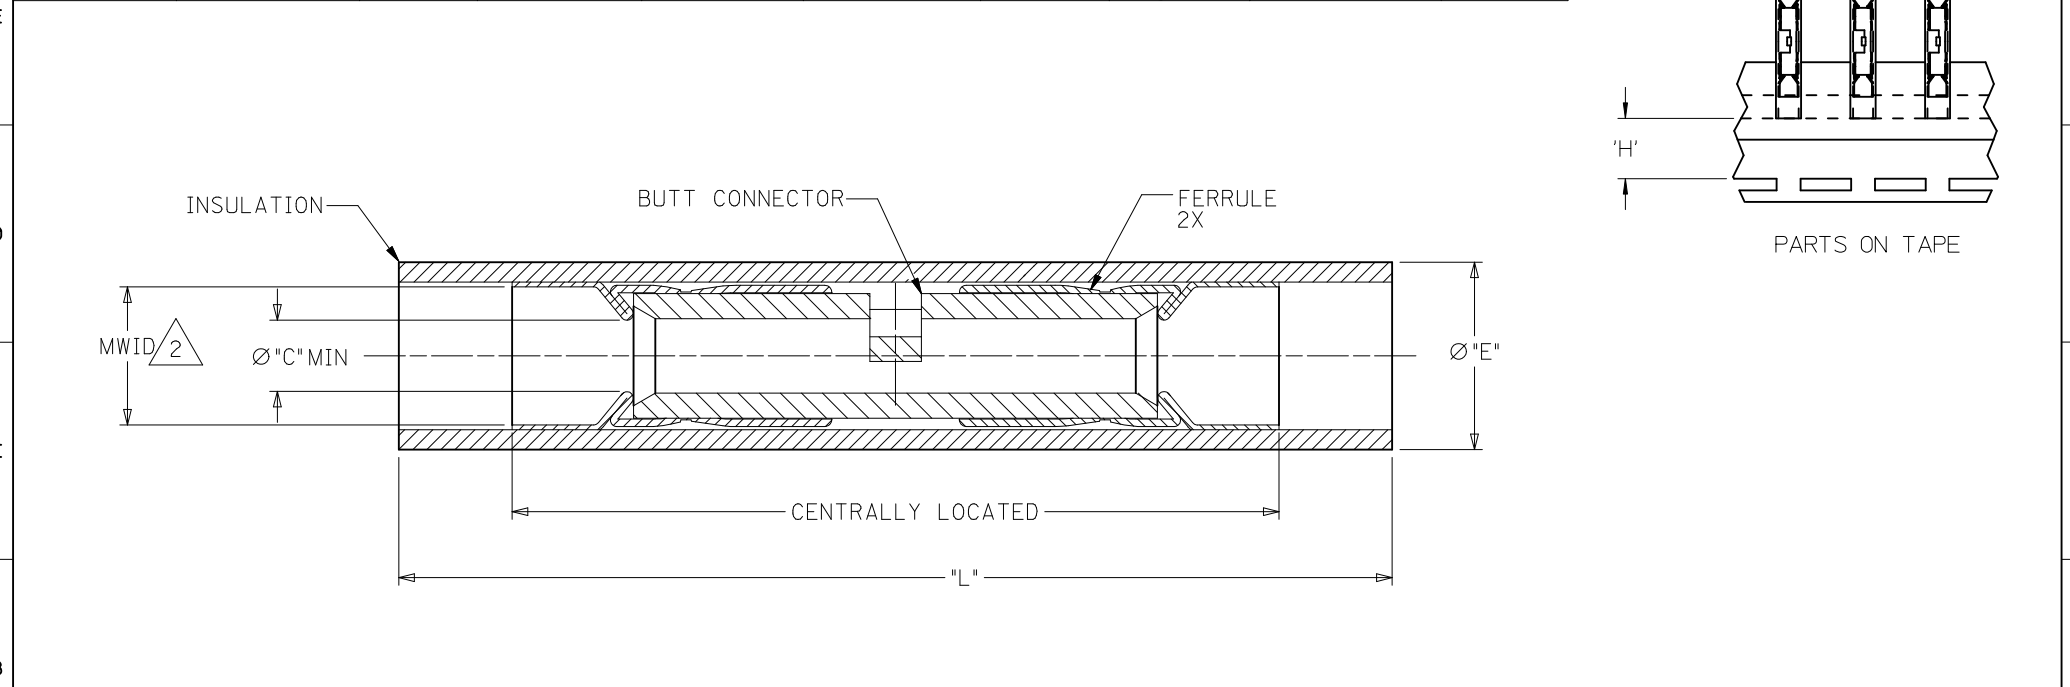

- NOTES:
- 1. MATERIAL;
INSULATION: NYLON
FERRULE: TIN PLATED BRASS.
BUTT CONNECTOR: TIN PLATED COPPER.
 - $\triangle 2$. MWID = MAXIMUM WIRE INSULATION DIAMETER.
 - 3. ASSEMBLY IS ROHS COMPLIANT.

ADD PINK P/N'S EC NO: WNA2009-0808 DRAWN BY: DRWNETHRODAHL 2009/08/18 CHKD: JMACNEIL 2002/03/22 APPR: JMACNEIL 2010/03/25	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 			
				mm	INCH	DRAWN BY BRE	DATE 2002/03/22	BUTT SPLICE, SEAMLESS, AVIKRIMP, SUPERDUTY				
			4 PLACES	± ---	± ---	CHECKED BY HEB	DATE 2002/03/22					
			3 PLACES	± ---	± .005	APPROVED BY JMACNEIL	DATE 2010/03/25					
			2 PLACES	± 0.13	± .01	MOLEX MOLEX INCORPORATED		SD-19200-001				
1 PLACE	± 0.25	± ---	DOCUMENT NO.		SHEET NO.							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							