

PART NO.	INSULATION COLOR	WIRE SIZE	ID	L1 MAX	L2 MAX.	MWID
AS-N-345	RED	22-18	.059	1.035	.675	.130
BS-N-331	BLUE	16-14	.091	1.080	.675	.140
CS-N-346	YELLOW	12-10	.138	1.300	.827	.223


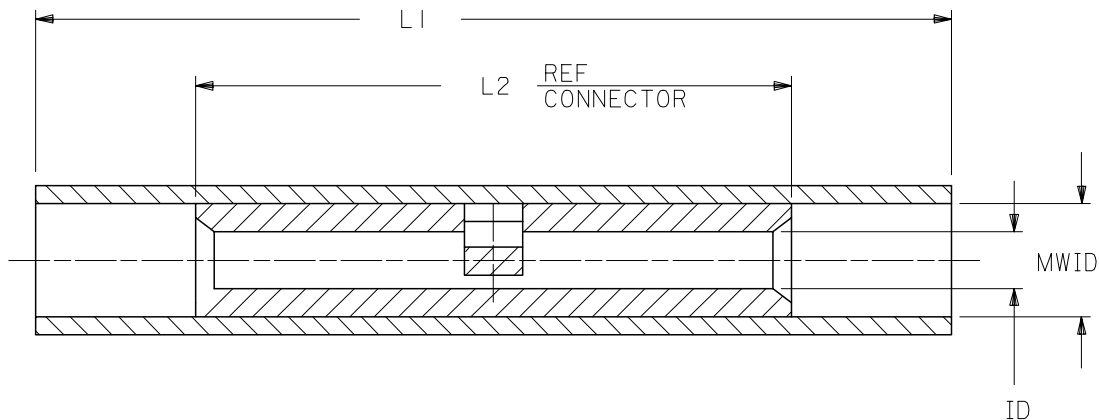
(B)

NOTES:

1. MATERIAL:

INSULATION: NYLON

CONNECTOR: TIN PLATED SEAMLESS COPPER

3. IF NECESSARY: SLIGHT FLARE ON ONE END
ACCEPTABLE FOR ASSEMBLY PURPOSES.

CUSTOMER DRAWING

REVISED & REDRAWN EC NO: B	DRWN:L SHADECK 2005/06/13 CHKD:RDEROSS 2005/06/21 APPR:RDEROSS 2005/06/21	DESCRIPTION	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 		
					mm	INCH	DRAWN BY EMF	DATE 07/03/91	NYLAKRIMP BUTT CONNECTOR			
				4 PLACES ± ---	± ---	CHECKED BY JM	DATE 07/03/91					
				3 PLACES ± ---	± ---	APPROVED BY	DATE					
				2 PLACES ± ---	± ---	FP	07/03/91	 MOLEX INCORPORATED		SHEET NO. 1 OF 1		
				1 PLACE ± ---	± ---	ANGULAR ± ---°				DOCUMENT NO. 60002-11C		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REV					SIZE A							

