

E

E

D

D

## NOTES:

## MATERIALS:

MOLDED BODY:	BLACK POLYAMIDE
COUPLING NUT:	NI PLATED BRASS
COMPRESSION NUT:	BLACK POLYAMIDE
GROMMETT	NITRILE RUBBER
CONTACTS:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	BLACK NYLON
INSERT HOUSING:	BLACK POLYAMIDE
SET SCREWS:	NI PLATED BRASS

## ELECTRICAL:

CURRENT RATING:	4AMP MAX
VOLTAGE RATING:	250V

## MECHANICAL:

TEMPERATURE RANGE:	-20° TO 80°C
INGRESS PROTECTION:	IP 67
AGENCY CERTIFICATIONS:	cCSAus FILE LR6837

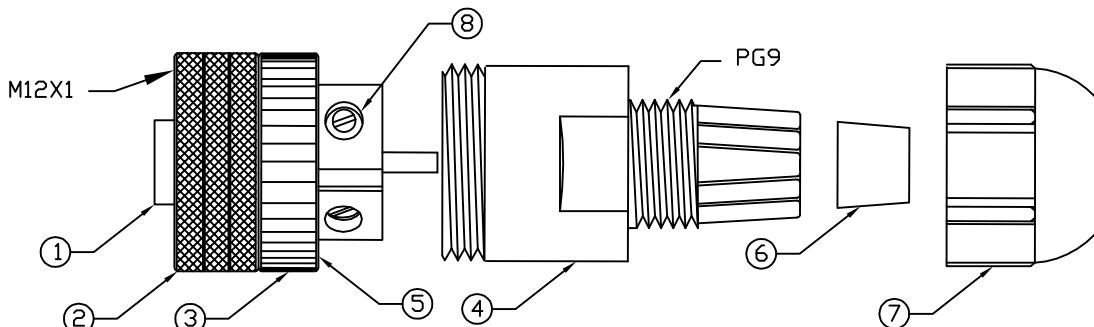


TABLE 2 - COMPONENT INFORMATION

ITEM	QTY	DESCRIPTION
1	1	INSULATOR
2	1	COUPLNG NUT
3	1	INSERT BODY
4	1	CONNECTOR BODY
5	1	O-RING
6	1	GROMMET
7	1	COMPRESSION NUT
8	4	SCREW, M3 x 5

UPDATE PER JM	EC NO. WNA2009-0313	DRAWN BY LHARTMAN	2008/10/27	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		CHKD: VOU	2008/11/07	▼ = 0	4 PLACES $\pm---$	mm	INCH		
		APPR: JFMURPHY	2008/1/10	▼ = 0	3 PLACES $\pm---$	$\pm .005$			CHECKED BY DATE
				▼ = 0	2 PLACES $\pm---$	$\pm .010$			APPROVED BY DATE
				▼ = 0	1 PLACE $\pm---$	$\pm .020$			JFMURPHY 2008/10/27
					ANGULAR $\pm 1^\circ$				molex
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MOLEX INCORPORATED
				REV: B					
					MATERIAL NO.	1200710036	DOCUMENT NO.	SD-130044-003	SHEET NO.
					SIZE	A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		