

MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

HOUSING PBT
COLOR BLACK

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD/TIN

INSULATOR POLYPROPYLENE

MOUNTING POST BRASS
PLATED TIN

PACKAGING: TRAY

SOLDER TAIL STEEL WIRE
PLATED TIN




LOCKWASHER PHOSPHOR BRONZE
PLATED NICKEL

JAM NUT BRASS
PLATED NICKEL


RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5(.217)
RECOMMENDED MOUNTING TORQUE:
0.56 N-m(5 IN-LBS)

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5(.217)
RECOMMENDED MOUNTING TORQUE:
0.56 N-m(5 IN-LBS)


PART # 73138-5003

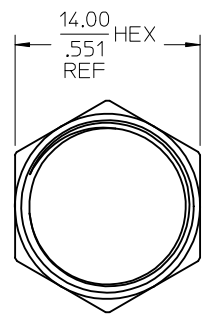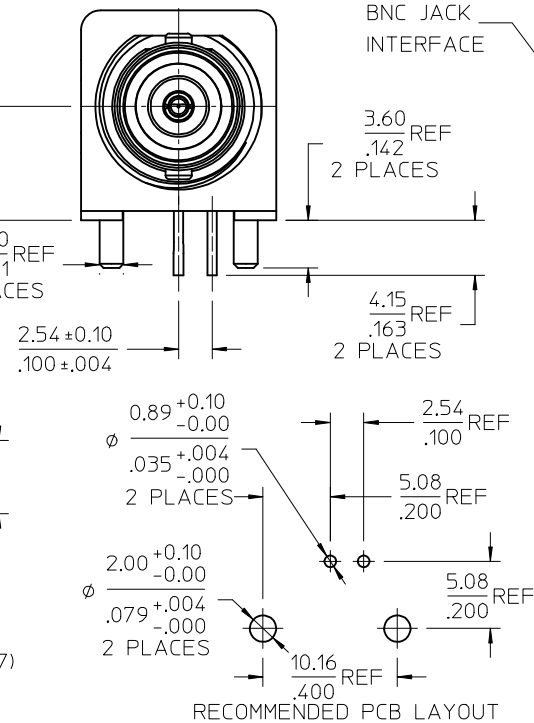

JAM NUT

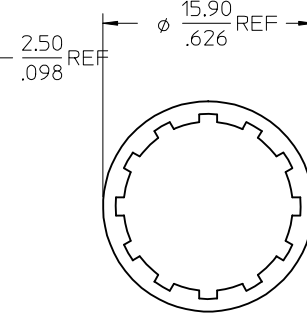

LOCKWASHER



PS-89675-103	ELECTRO/MECH PERFORM.
SPECIFICATION	DESCRIPTION

CHG: PS CHGD 89675-103 WAS 73598-0077 PER RF15-E119 EC NO: URF2015-0422 DRW: CME102 CHKD: APPR: YCHENG 2015/02/10 F2	DESCRIPTION
---	-------------

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± ---
3 PLACES ± ---
2 PLACES ± ---
1 PLACE ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE MM/IN
DRAWN BY LILY
DATE 1992/01/23
CHECKED BY DENG
DATE 1992/01/23
APPROVED BY
DATE
MATERIAL NO. 731385003
SIZE C

SCALE
DESIGN UNITS METRIC
THIRD ANGLE PROJECTION
TITLE BNC JACK, R/A PCB 50 OHMS, EWR-2081 BNC-J/BLK/PCB
MOLEX INCORPORATED
DOCUMENT NO. SD-73138-5003
SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION