

MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94 V-2)


HOUSING POLYESTER BUTLYENE TEREPHTHALATE
COLOR WHITE

MOUNTING POST BRASS
PLATED TIN










SOLDER TAIL BRASS WIRE
PLATED TIN

LOCKWASHER PHOSPHOR BRONZE
PLATED NICKEL

JAM NUT BRASS
PLATED NICKEL

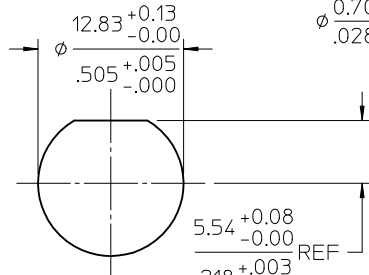

RECOMMENDED MOUNTING HOLE
PANEL THICKNESS: 5.50(.217) MAX
RECOMMENDED MOUNTING TORQUE:
0.56 N-m(5 INCH-LBS)

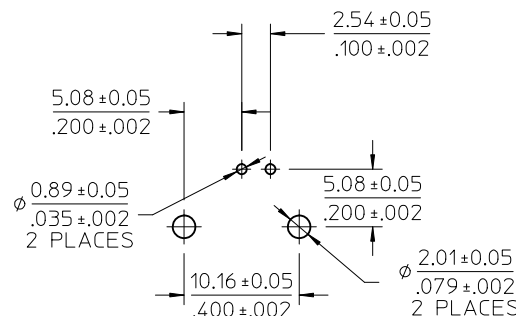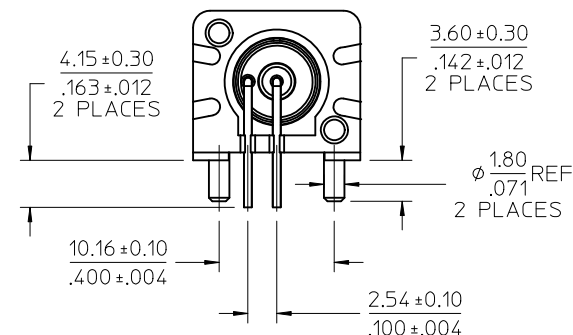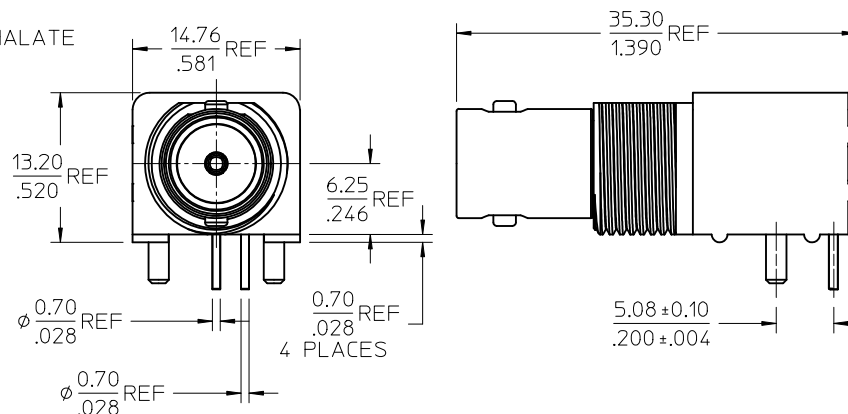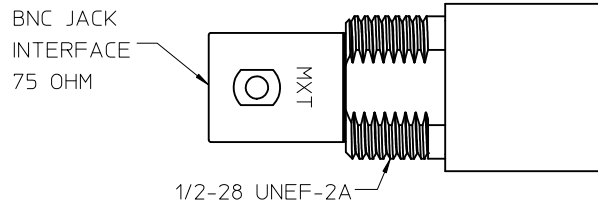

LOCKWASHER

JAM NUT

RECOMMENDED PCB LAYOUT

PS-89675-1030	ELECT / MECH
SPECIFICATION	DESCRIPTION

73171-2990	73100-0069, ONE PER BAG
73100-0069	PLASTIC TRAYS
PART NO.	PACKAGING

CHG: PS WAS PS-73598-0051 EC NO: URF2012-0549 DRWN: JWIENER CHKD: SSS APPR: JWIENER 2012/03/14 2012/03/14 2012/03/20		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
						DRAWN BY		DATE		TITLE BNC JACK, R/A, PCB RECEPTACLE, 75 OHMS BNC-J/RA/PCB			
						CHECKED BY		DATE					
								APPROVED BY		DATE		MOLEX INCORPORATED	
				ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-73100-0069		1 OF 1			
A2		REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									