


MATERIAL AND FINISHES


BODY ZINC ALLOY
PLATED NICKEL

CONTACT PHOSPHOR BRONZE
PLATED GOLD


INSULATOR PE-606





$\phi 11.00 \pm 0.13$
 $.433 \pm .005$



BNC JACK
75 OHM
INTERFACE

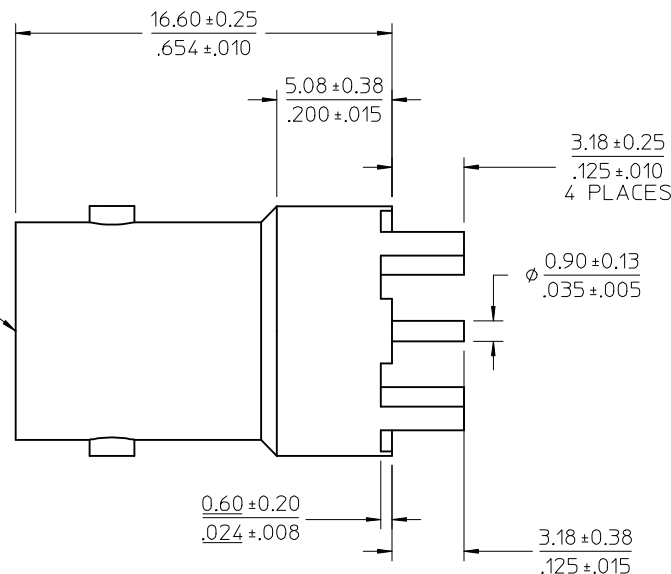

$\phi 1.90 \pm 0.10$
 $.075 \pm .004$
4 PLACES

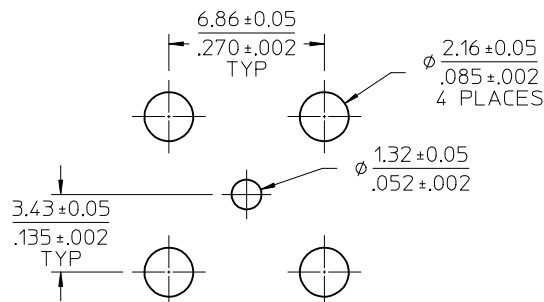

RECOMMENDED PCB
HOLE PATTERN

73171-1902	73171-1900, ONE PER BAG
73171-1900	BULK
PART NO.	PACKAGING

CHG: ADD STAND OFF
DIM 6.00 ± 0.20
EC NO: URF2014-0462
DRWN: CME102 2014/02/12
CHKD:
APPR: MHUANG 2014/02/27

REV	DESCRIPTION
A2	

QUALITY SYMBOLS
$\nabla = 0$
$\nabla = 0$
$\nabla = 0$

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	SCALE
MM/IN	
DRAWN BY	DATE
TEF	2003/01/07
CHECKED BY	DATE
SSS	2003/01/07
APPROVED BY	DATE
GMH	2003/01/07
MATERIAL NO.	
SEE TABLE	

DESIGN UNITS	THIRD ANGLE PROJECTION
METRIC	
TITLE	
BNC JACK, VERTICAL MOUNT PCB, EWR-1909, 75 OHMS BNC-J/PCB	
DOCUMENT NO.	
SD-73171-190	
SHEET NO.	
1 OF 1	