
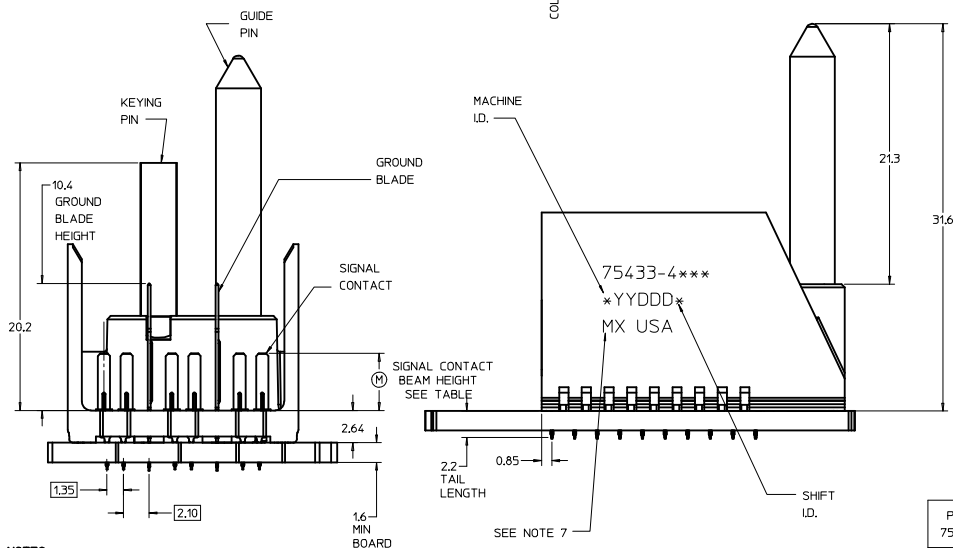


LEAD-FREE
PLATING

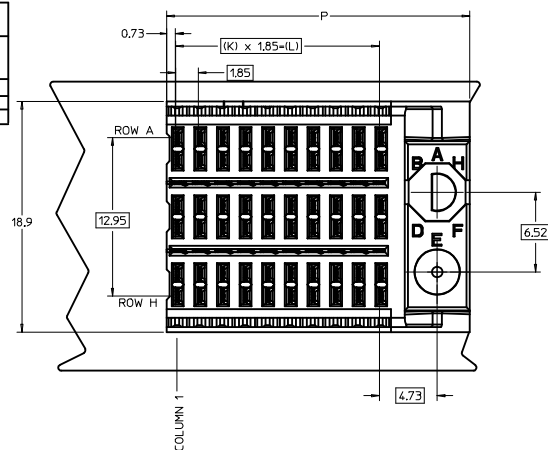


1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY, SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SMOOTH MATTE TIN (Sn) ON PCB TAILS, NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
6. PACKAGE PER PK-70873-572.
7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE A LABEL ON THE TUBE.
8. OPTION: FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT, FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED, DRILL SIZE #25B, PAD SIZE #550.
9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.
10. MAPS (MOLEX ADVANCED PLATING SYSTEMS).



MODULE _____
ORIENTATION _____
RIGHT = 4

KEYING **75433-4**
ORIENTATION COLUMN
0=NONE 1=10 COL
1=A 2=25 COL
2=B 5= 5 COL
ETC...

PIN LENGTH DIM "M"	GOLD (Au) THICKNESS micrometers
0=3.55 mm	0.25 (MAPS)
1=4.55 mm	
2=5.55 mm	
3=3.55 mm	0.76
4=4.55 mm	
5=5.55 mm	
7=3.55 mm	1.27
8=4.55 mm	
9=5.55 mm	

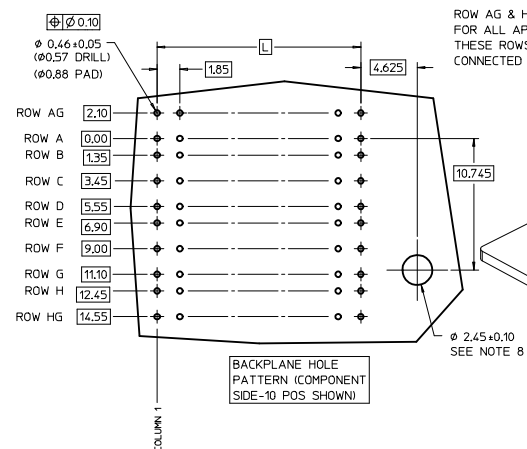


ROW AG & HG RECOMMENDED
FOR ALL APPLICATIONS.
THESE ROWS SHOULD BE
CONNECTED TO GROUND.

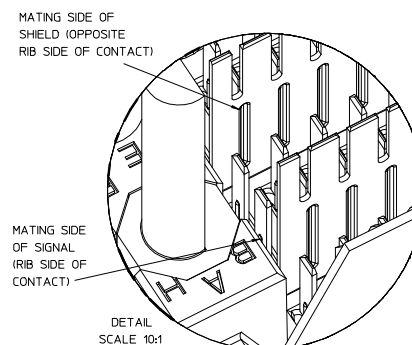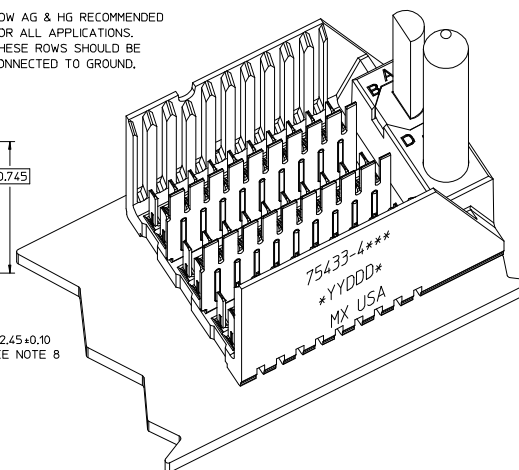

NOTCH DESIGNATES
APPROXIMATE POSITION
AT A1. ARCH AND
NOTCH ON OPPOSITE
SIDE OF PART MARKING.

P/N 75433-()	— — 0 — 0	— — 1 — A	— — 2 — B	— — 3 — C	— — 4 — D	— — 5 — E	— — 6 — F	— — 7 — G	— — 8 — H
KEYING PIN ORIENTATION									

THE PRIMARY CARTON WITH A LABEL STATING
"ELV AND RoHS COMPLAINT" IS LEAD FREE.
CARTONS WITHOUT THIS LABEL MAY CONTAIN LEAD.

REV TO LEAD-FREE EC NO: UCP2013-0690 DRG NO: 2012/09/05 CHKD:MOLFE 2012/09/07 APPR:SWILLER 2012/10/25			QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><thead><tr><th></th><th>mm</th><th>INCH</th></tr></thead><tbody><tr><td>4 PLACES</td><td>±0.15</td><td>±0.006</td></tr><tr><td>3 PLACES</td><td>±0.20</td><td>±0.008</td></tr><tr><td>2 PLACES</td><td>±0.25</td><td>±0.010</td></tr><tr><td>1 PLACE</td><td>±0.38</td><td>±0.015</td></tr><tr><td>0 PLACE</td><td>±0.50</td><td>±0.020</td></tr></tbody></table> ANGULAR ±1/2°		mm	INCH	4 PLACES	±0.15	±0.006	3 PLACES	±0.20	±0.008	2 PLACES	±0.25	±0.010	1 PLACE	±0.38	±0.015	0 PLACE	±0.50	±0.020	DIMENSION STYLE MM ONLY DRAWN BY DATE NMART IN 2005/02/20 CHECKED BY DATE SREED 2005/02/20 APPROVED BY DATE CBXLER 2005/02/20	SCALE 5:1 DESIGN UNITS METRIC  THIRD ANGLE PROJECTION	GBX 3-PAIR LF RIGHT END BACKPLANE SALES ASSEMBLY 	SHEET NO. 1 OF 1
	mm	INCH																								
4 PLACES	±0.15	±0.006																								
3 PLACES	±0.20	±0.008																								
2 PLACES	±0.25	±0.010																								
1 PLACE	±0.38	±0.015																								
0 PLACE	±0.50	±0.020																								
DESCRIPTION DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART SIZE D	DOCUMENT NO. SD-75433-410			INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			