

△ 接点部までの嵌合長さ。  
MATING LENGTH TO CONTACT POINT.

4. エンボステープ梱包時は、アクチュエータが  
ロックした状態とする。  
ACTUATOR TO BE LOCKED IN EMBOSSED TAPE PACKAGE.

- △5 FPC挿入深さ  
INSERTION DEPTH OF FPC.
- △6 パターン書き込み禁止エリア。  
NO FOOT PRINT AREA.

- △ テール及び金具の平坦度は、0.15 以下とする。  
COPLANARITY OUT OF SPECIFICATION.  
TAIL : 0.15 MAX.  
NAIL : 0.15 MAX.

8. 本製品は 52207-\*\*-19 の鉛フリー品である。  
THIS PRODUCT IS GOLD PLATING OF 52207-\*\*-19.




TERMINAL : PHOS-BRO.(I=0.32)  
 PLATED  
 CONTACT AREA : GOLD PLATED 0.1MICROMETER MIN.  
 TAIL AREA : TIN PLATED 1.0MICROMETER MIN.  
 OVER PLATED : NICKEL PLATED 1.0MICROMETER MIN.

具 : 銅合金 (t=0.25)  
メッキ : 錫メッキ 1マイクロメートル以上  
下地メッキ : ニッケル 1マイクロメートル以上


FITTING NAIL : PHOS-BRO.(t=0.25)  
 PLATED : TIN PLATED 1MICROMETER MIN.  
 OVER PLATED : NICKEL PLATED 1MICROMETER MIN.

△3 パターンはくり止め用金具  
FITTING NAIL FOR PREVENTION OF FOOT PRINT PEELING.

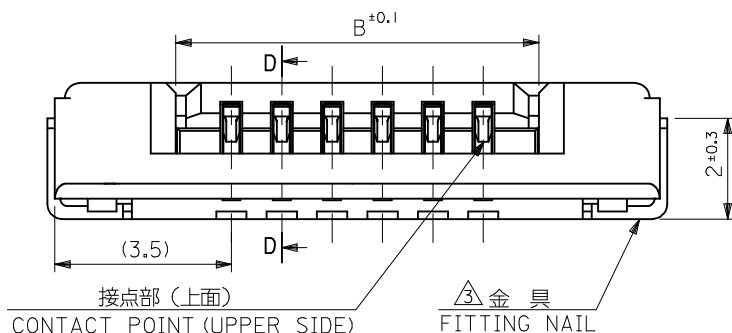

|      |      |    |                      |          |
|------|------|----|----------------------|----------|
| 34.7 | 31.2 | 29 | 52207-3067           | 30       |
| 33.7 | 30.2 | 28 | 52207-2967           | 29       |
| 32.7 | 29.2 | 27 | 52207-2867           | 28       |
| 31.7 | 28.2 | 26 | 52207-2767           | 27       |
| 30.7 | 27.2 | 25 | 52207-2667           | 26       |
| 29.7 | 26.2 | 24 | 52207-2567           | 25       |
| 28.7 | 25.2 | 23 | 52207-2467           | 24       |
| 27.7 | 24.2 | 22 | 52207-2367           | 23       |
| 26.7 | 23.2 | 21 | 52207-2267           | 22       |
| 25.7 | 22.2 | 20 | 52207-2167           | 21       |
| 24.7 | 21.2 | 19 | 52207-2067           | 20       |
| 23.7 | 20.2 | 18 | 52207-1967           | 19       |
| 22.7 | 19.2 | 17 | 52207-1867           | 18       |
| 21.7 | 18.2 | 16 | 52207-1767           | 17       |
| 20.7 | 17.2 | 15 | 52207-1667           | 16       |
| 19.7 | 16.2 | 14 | 52207-1567           | 15       |
| 18.7 | 15.2 | 13 | 52207-1467           | 14       |
| 17.7 | 14.2 | 12 | 52207-1367           | 13       |
| 16.7 | 13.2 | 11 | 52207-1267           | 12       |
| 15.7 | 12.2 | 10 | 52207-1167           | 11       |
| 14.7 | 11.2 | 9  | 52207-1067           | 10       |
| 13.7 | 10.2 | 8  | 52207-0967           | 9        |
| 12.7 | 9.2  | 7  | 52207-0867           | 8        |
| 11.7 | 8.2  | 6  | 52207-0767           | 7        |
| 10.7 | 7.2  | 5  | 52207-0667           | 6        |
| 9.7  | 6.2  | 4  | 52207-0567           | 5        |
| 8.7  | 5.2  | 3  | 52207-0467           | 4        |
| 7.7  | 4.2  | 2  | 52207-0367           | 3        |
| C    | B    | A  | MATERIAL NO.         | 極数       |
|      |      |    | MODEL NO. 52207-**67 | CIRCUITS |

EN-02JA(021)

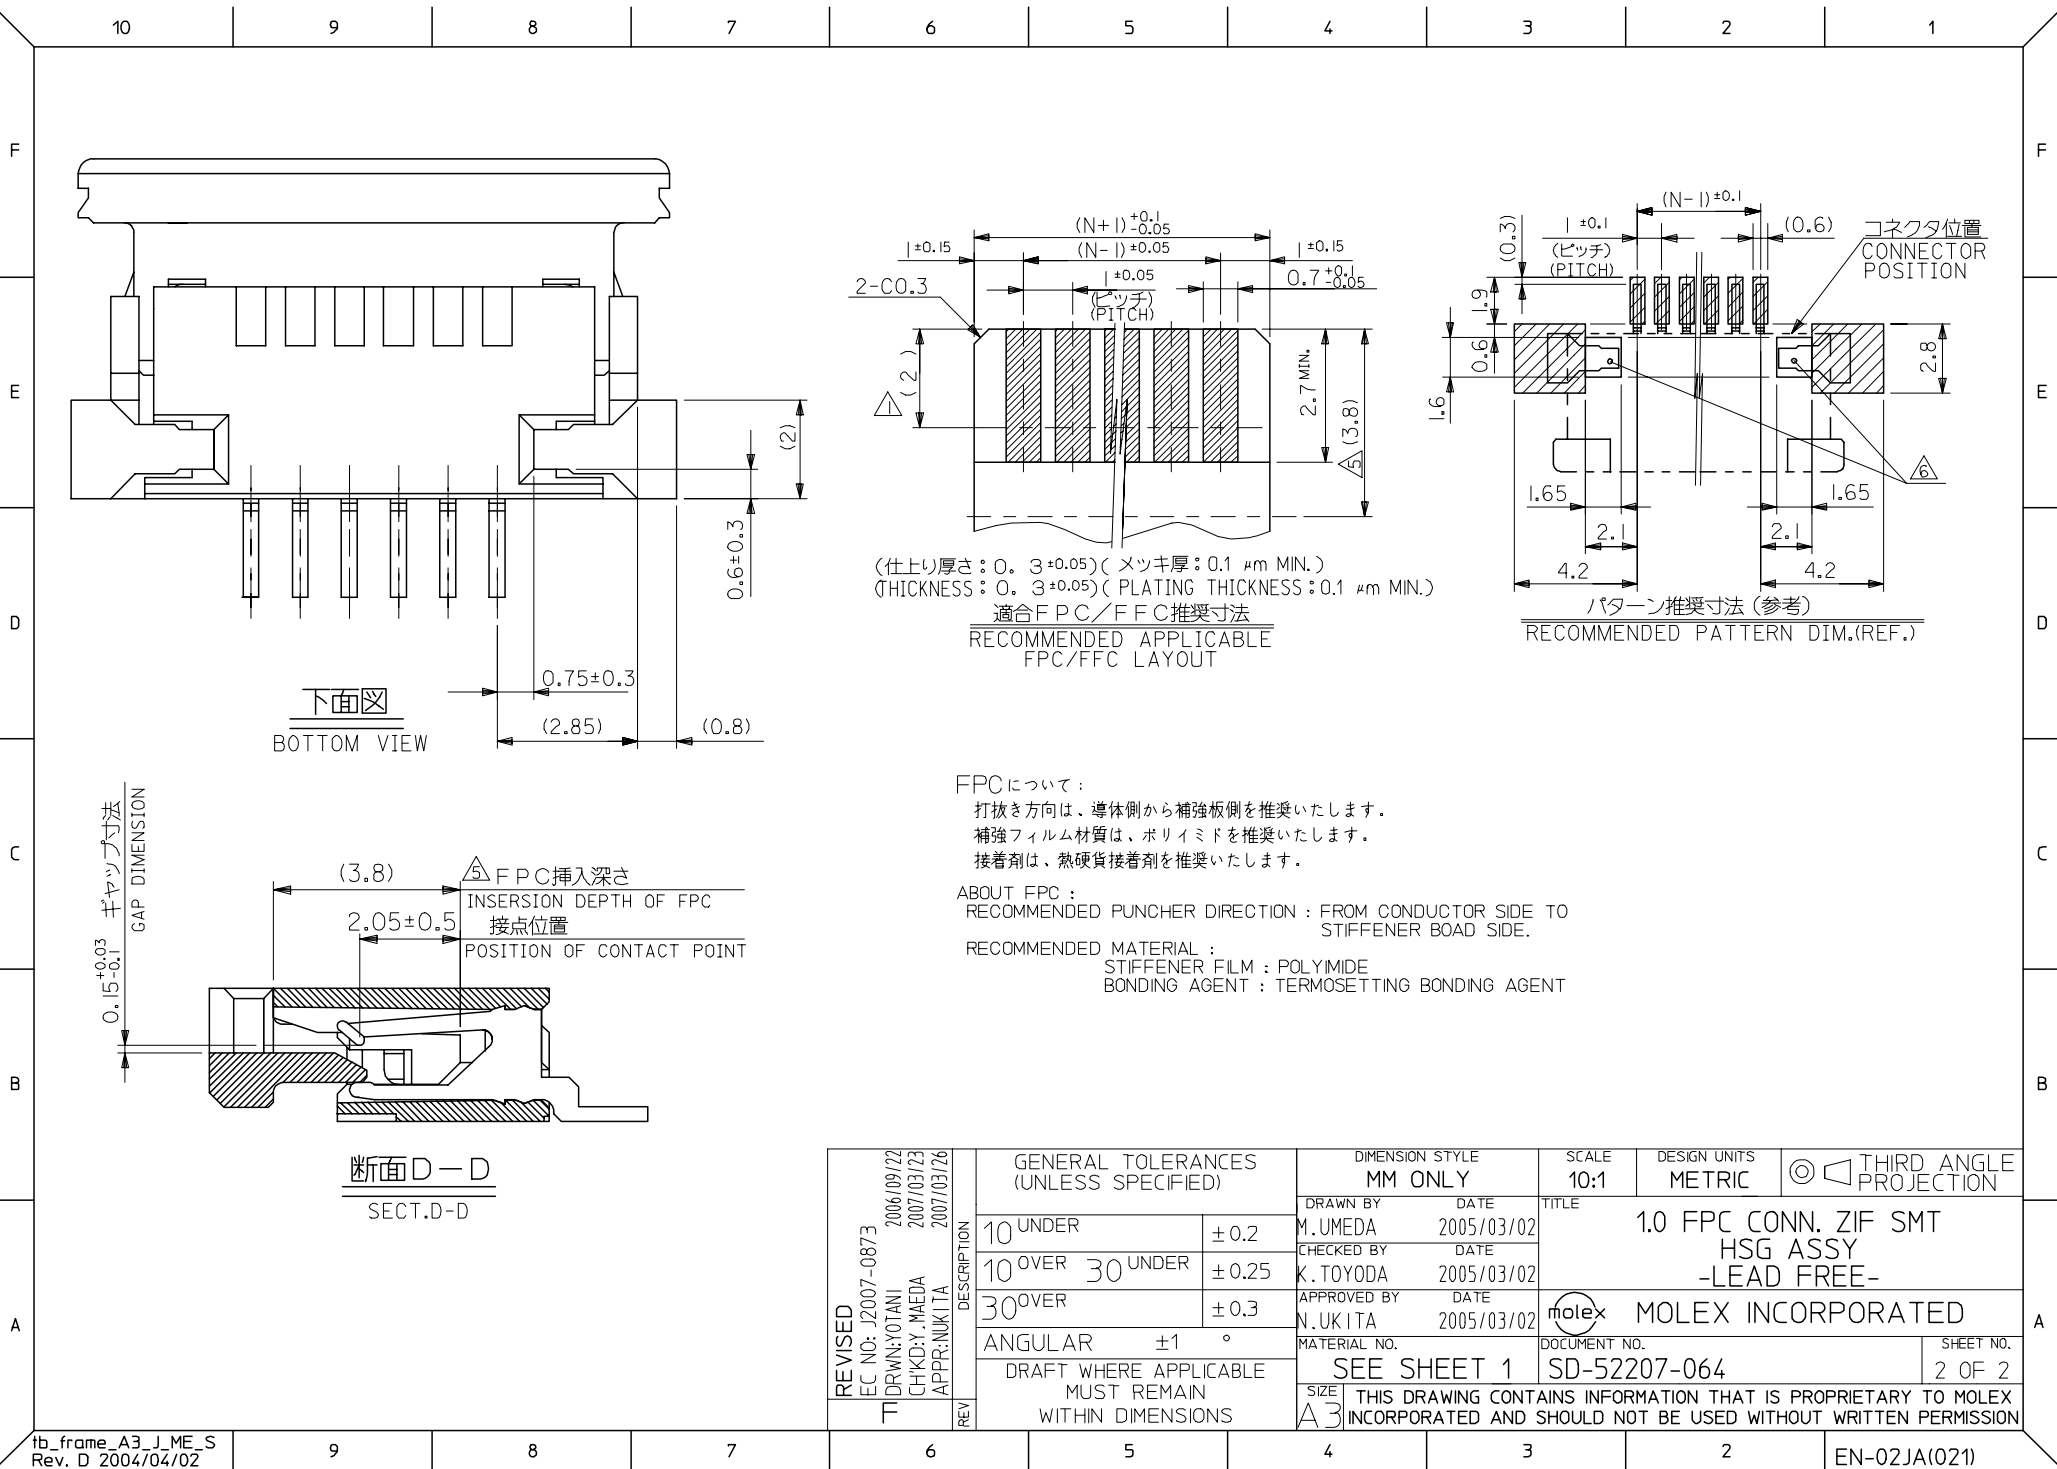


## 注記

1. 製品番号 52207-\*\*67 の梱包状態はアクチュエータがロックした状態とする。  
詳細寸法については図面 SD-52207-064 を参照下さい。  
IN THE PACKAGE, ACTUATOR OF PART NO.52207-\*\*67 SHOULD BE LOCKED  
RE DETAILED DIMENSIONS, SEE SD-52207-064


2. 梱包数量: 1000個/リール  
NUMBER OF CONNECTORS: 1000PCS/REEL

3. リードテープ長さ(LEAD TAPE LENGTH)

トップテープ TOP TAPE      トップテープ TOP TAPE  
リーダー部 LEADER PART      未接着部 NON-BONDED PART

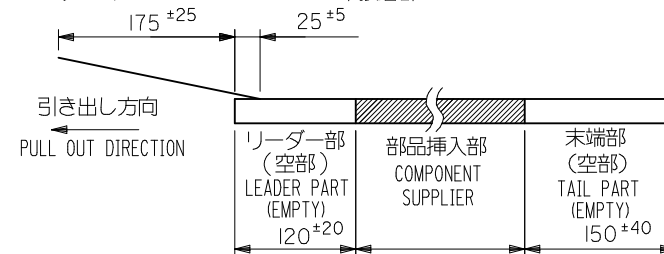

4. トップテープの剥離強度: 0.1~1.3N (10gf~130gf) (剥離方向は下図参照)  
尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)  
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N (10gf~130gf)  
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)  
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.(PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.)



## 5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)

トップテープ (TOPTAPE): PET, PE, PEF

リール (REEL): ポリスチレン (PS) <リサイクル材を含む>



POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は 52207-\*\*85 の金メッキ品である。

THIS PRODUCT IS GOLD PLATING OF 52207-\*\*85.

7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。


THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

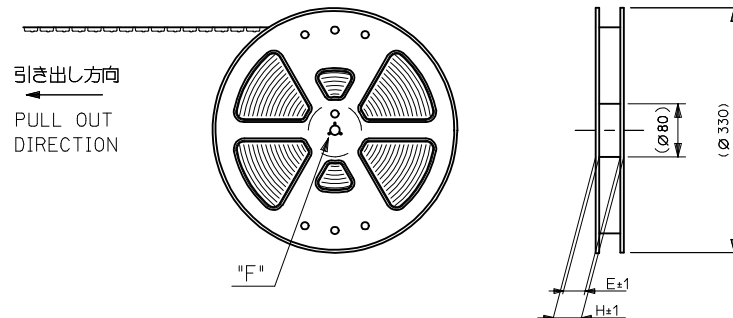

DETAIL "F"


MODEL No.52207-\*\*60

|         |                    |                                                             |                                        |             |                                                                                                                                                  |           |        |                            |            |                                                                                  |                        |                           |  |  |
|---------|--------------------|-------------------------------------------------------------|----------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|----------------------------|------------|----------------------------------------------------------------------------------|------------------------|---------------------------|--|--|
| REVISED | EC NO.: J2016-0832 | DRAWN: YMI ZUN002<br>CHKD: K TAKAHASHI<br>APPR: TKSUJHARA01 | 2016/02/03<br>2016/02/03<br>2016/02/12 | DESCRIPTION | GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                                                                                                         |           |        | DIMENSION STYLE<br>MM ONLY |            | SCALE<br>---                                                                     | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|         |                    |                                                             |                                        |             | 0.25 UNDER                                                                                                                                       | UNDER     | ± 0.03 | DRAWN BY                   | DATE       | TITLE<br>1.0 FPC CONN. ZIF SMT<br>WITH EMBSTP PKG<br>-LEAD FREE-<br><b>molex</b> |                        |                           |  |  |
|         |                    |                                                             |                                        |             | 0.25 OVER                                                                                                                                        | 0.5 UNDER | ± 0.05 | M.UMEDA                    | 2005/03/03 |                                                                                  |                        |                           |  |  |
|         |                    |                                                             |                                        |             | 0.5 OVER                                                                                                                                         | 1.0 UNDER | ± 0.1  | CHECKED BY                 | DATE       | DOCUMENT NO.<br>SD-52207-065                                                     |                        |                           |  |  |
|         |                    |                                                             |                                        |             | 1.0 OVER                                                                                                                                         | 10 UNDER  | ± 0.2  | K.TOYODA                   | 2005/03/03 |                                                                                  |                        |                           |  |  |
|         |                    |                                                             |                                        |             | 10 OVER                                                                                                                                          | 30 UNDER  | ± 0.25 | APPROVED BY                | DATE       | SHEET NO.<br>1 OF 5                                                              |                        |                           |  |  |
|         |                    |                                                             |                                        |             | 30 OVER                                                                                                                                          |           | ± 0.3  | N.UKITA                    | 2005/03/03 |                                                                                  |                        |                           |  |  |
|         |                    |                                                             |                                        |             | ANGULAR ±1 °                                                                                                                                     |           |        | MATERIAL NO.               |            | SEE SHEET 2-5                                                                    |                        |                           |  |  |
|         |                    |                                                             |                                        |             | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                                                                       |           |        | SIZE<br>A3                 |            |                                                                                  |                        |                           |  |  |
|         |                    |                                                             |                                        |             | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC<br>TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |           |        |                            |            |                                                                                  |                        |                           |  |  |

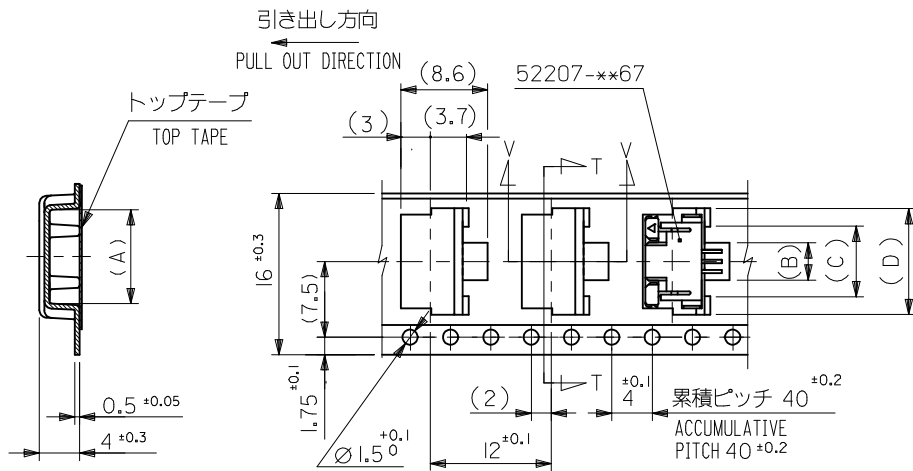


SECT:T-T

16mm 幅 キャリアテープ  
16mm WIDTH CARRIER TAPE

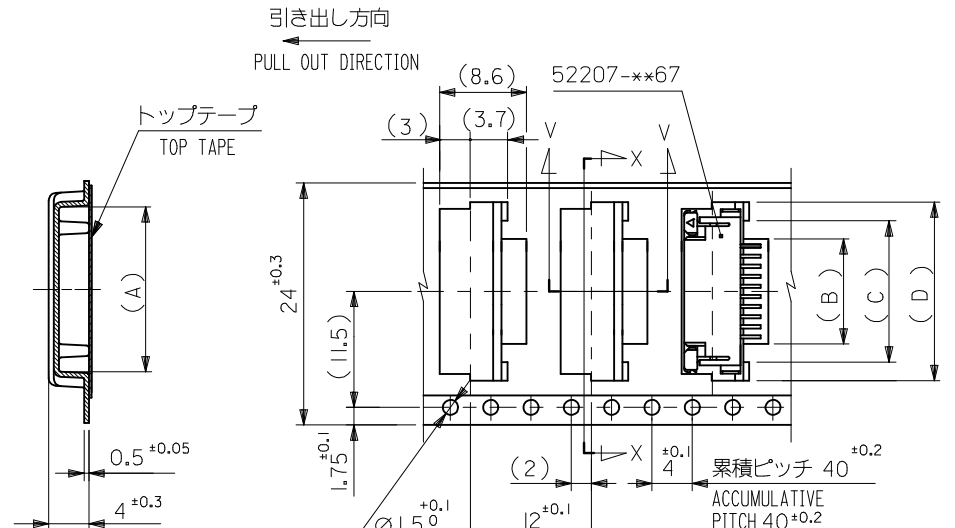

SECT:X-X



24mm 幅 キャリアテープ  
24mm WIDTH CARRIER TAPE

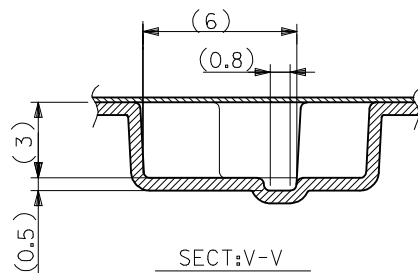

|                                |      |      |      |     |      |      |                               |            |
|--------------------------------|------|------|------|-----|------|------|-------------------------------|------------|
| 24                             | 29.4 | 25.4 | 18.5 | 15  | 11.7 | 17.3 | 52207-1160                    | 11         |
|                                |      |      | 17.5 | 14  | 10.7 | 16.3 | 52207-1060                    | 10         |
|                                |      |      | 16.5 | 13  | 9.7  | 15.3 | 52207-0960                    | 9          |
|                                |      |      | 15.5 | 12  | 8.7  | 14.3 | 52207-0860                    | 8          |
|                                |      |      | 14.5 | 11  | 7.7  | 13.3 | 52207-0760                    | 7          |
|                                |      |      | 13.5 | 10  | 6.7  | 12.3 | 52207-0660                    | 6          |
|                                |      |      | 12.5 | 9   | 5.7  | 11.3 | 52207-0560                    | 5          |
|                                |      |      | 11.5 | 8   | 4.7  | 10.3 | 52207-0460                    | 4          |
| 16                             | 21.4 | 17.4 | 10.5 | 7   | 3.7  | 9.3  | 52207-0360                    | 3          |
| キャリアテープ幅<br>CARRIER TAPE WIDTH | H    | E    | (D)  | (C) | (B)  | (A)  | EMBOSSED PACKAGE<br>ORDER NO. | 極数<br>CKT. |

|                                                                                                                                   |                                                            |                                          |           |            |                                                                                                                                                  |            |                                                                  |                        |                           |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------|-----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------|------------------------|---------------------------|--|--|
| SEE SHEET 1<br>EC NO.: J2016-0832<br>DRWN: YMI ZUN002 2016/02/03<br>CHKD: K TAKAHASHI 2016/02/03<br>APPR: T KUSUHARA01 2016/02/12 | DESCRIPTION                                                | GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |           |            | DIMENSION STYLE<br>MM ONLY                                                                                                                       |            | SCALE<br>---                                                     | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|                                                                                                                                   |                                                            | 0.25 UNDER                               | UNDER     | ± 0.03     | DRAWN BY                                                                                                                                         | DATE       | TITLE<br>1.0 FPC CONN. ZIF SMT<br>WITH EMBSTP PKG<br>-LEAD FREE- |                        |                           |  |  |
|                                                                                                                                   |                                                            | 0.25 OVER                                | 0.5 UNDER | ± 0.05     | M.UMEDA                                                                                                                                          | 2005/03/03 |                                                                  |                        |                           |  |  |
|                                                                                                                                   |                                                            | 0.5 OVER                                 | 1.0 UNDER | ± 0.1      | CHECKED BY                                                                                                                                       | DATE       | DOCUMENT NO.<br>SD-52207-065                                     |                        |                           |  |  |
|                                                                                                                                   |                                                            | 1.0 OVER                                 | 10 UNDER  | ± 0.2      | K.TOYODA                                                                                                                                         | 2005/03/03 |                                                                  |                        |                           |  |  |
|                                                                                                                                   |                                                            | 10 OVER                                  | 30 UNDER  | ± 0.25     | APPROVED BY                                                                                                                                      | DATE       | SHEET NO.<br>2 OF 5                                              |                        |                           |  |  |
|                                                                                                                                   |                                                            | 30 OVER                                  |           | ± 0.3      | N.UKITA                                                                                                                                          | 2005/03/03 |                                                                  |                        |                           |  |  |
|                                                                                                                                   |                                                            | ANGULAR ±1 °                             |           |            | MATERIAL NO.                                                                                                                                     |            |                                                                  |                        |                           |  |  |
|                                                                                                                                   | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                                          |           | SIZE<br>A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC<br>TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |            |                                                                  |                        |                           |  |  |
|                                                                                                                                   | REV                                                        |                                          |           |            |                                                                                                                                                  |            |                                                                  |                        |                           |  |  |

10 9 8 7 6 5 4 3 2 1

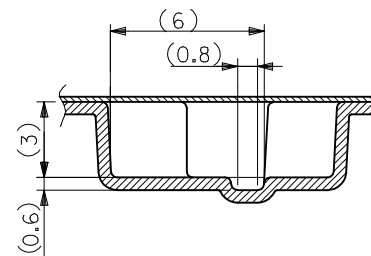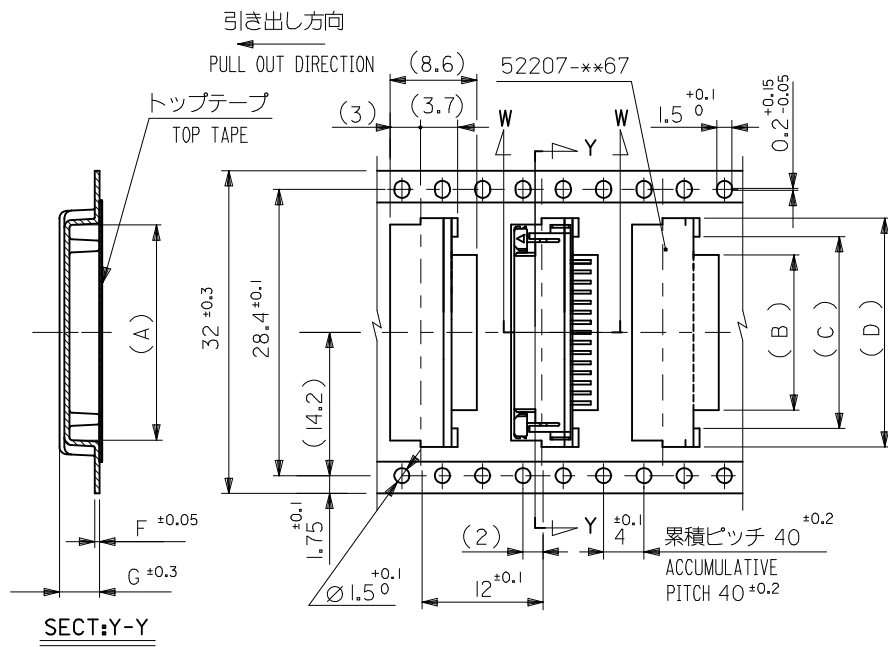

32mm 幅 キャリアテープ  
32mm WIDTH CARRIER TAPE

|                                |      |      |     |     |      |     |      |       |                              |            |
|--------------------------------|------|------|-----|-----|------|-----|------|-------|------------------------------|------------|
| 32                             | 37.4 | 33.4 | 4.0 | 0.5 | 23.5 | 20  | 16.7 | 22.35 | 52207-1660                   | 16         |
|                                |      |      | 4.2 | 0.6 | 22.5 | 19  | 15.7 | 21.35 | 52207-1560                   | 15         |
|                                |      |      | 4.2 | 0.6 | 21.5 | 18  | 14.7 | 20.35 | 52207-1460                   | 14         |
|                                |      |      | 4.2 | 0.6 | 20.5 | 17  | 13.7 | 19.35 | 52207-1360                   | 13         |
|                                |      |      | 4.2 | 0.6 | 19.5 | 16  | 12.7 | 18.35 | 52207-1260                   | 12         |
| キャリアテープ幅<br>CARRIER TAPE WIDTH | H    | E    | (G) | (F) | (D)  | (C) | (B)  | (A)   | EMBOSSD PACKAGE<br>ORDER NO. | 極致<br>CKT. |

|                                                                                                                                 |                    |                                                            |                                                                                                                                                  |       |                            |            |                                                                 |                        |                           |  |  |           |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------|------------|-----------------------------------------------------------------|------------------------|---------------------------|--|--|-----------|--|--|--|--|
| SEE SHEET 1<br>EC NO: J2016-0832<br>DRWN: YMIJUN002 2016/02/03<br>CHKD: K TAKAHASHI 2016/02/03<br>APPR: T KUSUHARA01 2016/02/12 | DESCRIPTION<br>REV | GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                   |                                                                                                                                                  |       | DIMENSION STYLE<br>MM ONLY |            | SCALE<br>---                                                    | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 0.25 UNDER                                                 | UNDER                                                                                                                                            | ±0.03 | DRAWN BY                   | DATE       | TITLE<br>1.0 FPC CONN ZIF SMT<br>WITH EMBSTP PKG<br>-LEAD FREE- |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 0.25 OVER                                                  | 0.5 UNDER                                                                                                                                        | ±0.05 | M.UMEDA                    | 2005/03/03 |                                                                 |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 0.5 OVER                                                   | 1.0 UNDER                                                                                                                                        | ±0.1  | CHECKED BY                 | DATE       | DOCUMENT NO.<br>SD-52207-065                                    |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 1.0 OVER                                                   | 10 UNDER                                                                                                                                         | ±0.2  | K.TOYODA                   | 2005/03/03 |                                                                 |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 10 OVER                                                    | 30 UNDER                                                                                                                                         | ±0.25 | APPROVED BY                | DATE       | SHEET NO.<br>3 OF 5                                             |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | 30 OVER                                                    |                                                                                                                                                  | ±0.3  | N.UKITA                    | 2005/03/03 |                                                                 |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 |                    | ANGULAR ±1 °                                               |                                                                                                                                                  |       | MATERIAL NO.               |            |                                                                 |                        |                           |  |  | SEE CHART |  |  |  |  |
|                                                                                                                                 |                    | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                                                                                                                                                  |       | SIZE<br>A3                 |            |                                                                 |                        |                           |  |  |           |  |  |  |  |
|                                                                                                                                 | I                  | REV                                                        | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC<br>TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |       |                            |            |                                                                 |                        |                           |  |  |           |  |  |  |  |

9 8 7 6 5 4 3 2 1

F


E

D

C

B

A

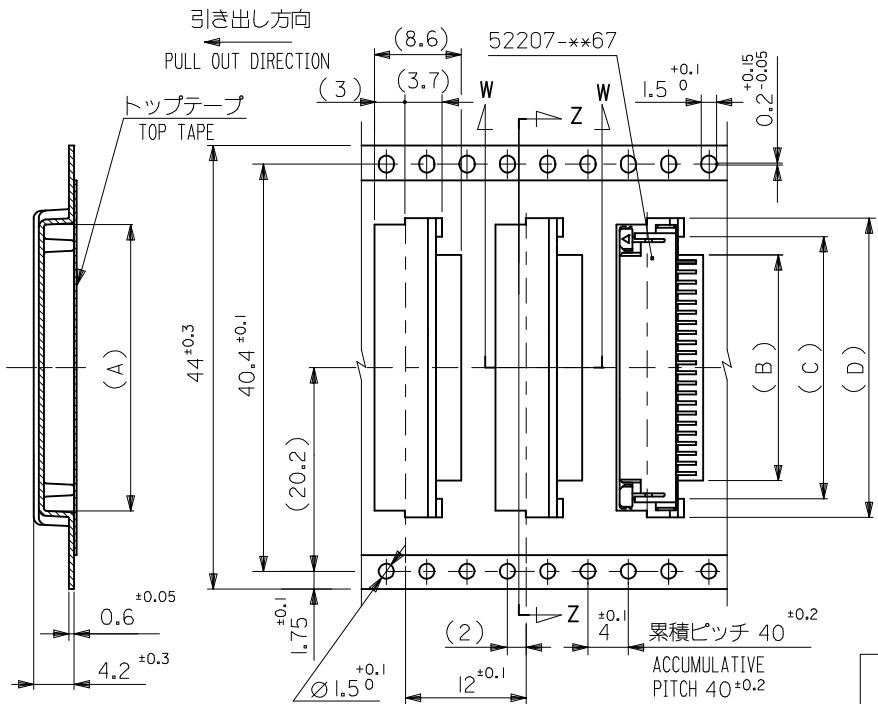

SECT:Z-Z

44mm 幅 キャリアテープ  
44mm WIDTH CARRIER TAPE

|                                |      |      |     |     |      |     |      |       |                               |            |
|--------------------------------|------|------|-----|-----|------|-----|------|-------|-------------------------------|------------|
| 44                             | 49.4 | 45.4 | —   | —   | 34.5 | 31  | 27.7 | 33.35 | 52207-2760                    | 27         |
|                                |      |      | —   | —   | 33.5 | 30  | 26.7 | 32.35 | 52207-2660                    | 26         |
|                                |      |      | —   | —   | 32.5 | 29  | 25.7 | 31.35 | 52207-2560                    | 25         |
|                                |      |      | —   | —   | 31.5 | 28  | 24.7 | 30.35 | 52207-2460                    | 24         |
|                                |      |      | —   | —   | 30.5 | 27  | 23.7 | 29.35 | 52207-2360                    | 23         |
|                                |      |      | —   | —   | 29.5 | 26  | 22.7 | 28.35 | 52207-2260                    | 22         |
|                                |      |      | —   | —   | 28.5 | 25  | 21.7 | 27.35 | 52207-2160                    | 21         |
|                                |      |      | —   | —   | 27.5 | 24  | 20.7 | 26.35 | 52207-2060                    | 20         |
|                                |      |      | —   | —   | 26.5 | 23  | 19.7 | 25.35 | 52207-1960                    | 19         |
|                                |      |      | —   | —   | 25.5 | 22  | 18.7 | 24.35 | 52207-1860                    | 18         |
|                                |      |      | —   | —   | 24.5 | 21  | 17.7 | 23.35 | 52207-1760                    | 17         |
| キャリアテープ幅<br>CARRIER TAPE WIDTH | H    | E    | (G) | (F) | (D)  | (C) | (B)  | (A)   | EMBOSSED PACKAGE<br>ORDER NO. | 極数<br>CKT. |

SEE SHEET 1  
EC NO.: J2016-0832  
DRWN: YIMZUN002 2016/02/03  
CHKD: KTAKAHASHI 2016/02/03  
APPR: KUSUHARA01 2016/02/12

DESCRIPTION  
REV  
H


GENERAL TOLERANCES  
(UNLESS SPECIFIED)  
0.25 UNDER UNDER ±0.03  
0.25 OVER 0.5 UNDER ±0.05  
0.5 OVER 1.0 UNDER ±0.1  
1.0 OVER 10 UNDER ±0.2  
10 OVER 30 UNDER ±0.25  
30 OVER ±0.3  
ANGULAR ±1 °  
DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE  
MM ONLY  
DRAWN BY DATE  
M.UMEDA 2005/03/03  
CHECKED BY DATE  
K.TOYODA 2005/03/03  
APPROVED BY DATE  
N.UKITA 2005/03/03  
MATERIAL NO.  
SEE CHART


SCALE  
---  
DESIGN UNITS  
METRIC  
THIRD ANGLE  
PROJECTION

1.0 FPC CONN ZIF SMT  
WITH EMBSTP PKG  
-LEAD FREE-  
**molex**  
DOCUMENT NO.  
SD-52207-065  
SHEET NO.  
4 OF 5

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC  
TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

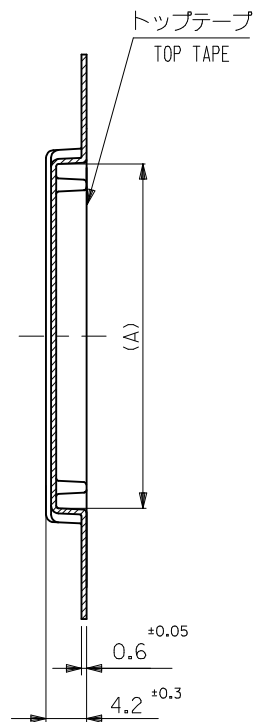

SECT:U-U

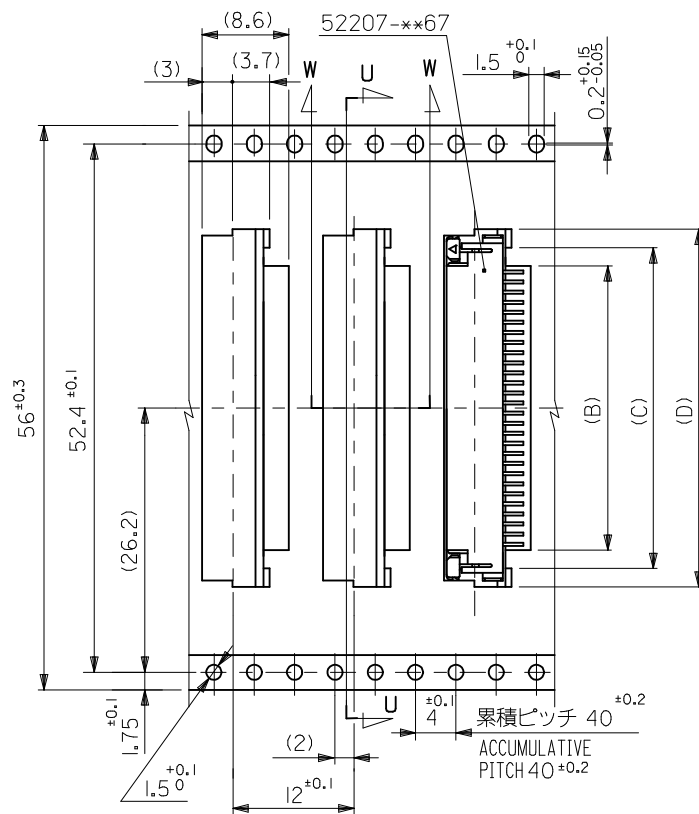

56mm 幅 キャリアテープ  
56mm WIDTH CARRIER TAPE

|                                |      |      |      |     |      |       |                               |            |
|--------------------------------|------|------|------|-----|------|-------|-------------------------------|------------|
| 56                             | 61.4 | 57.4 | 37.5 | 34  | 30.7 | 36.35 | 52207-3060                    | 30         |
|                                |      |      | 36.5 | 33  | 29.7 | 35.35 | 52207-2960                    | 29         |
|                                |      |      | 35.5 | 32  | 28.7 | 34.35 | 52207-2860                    | 28         |
| キャリアテープ幅<br>CARRIER TAPE WIDTH | H    | E    | (D)  | (C) | (B)  | (A)   | EMBOSSED PACKAGE<br>ORDER NO. | 極数<br>CKT. |

|                                                                                                                                  |                                                            |                                          |           |            |                                                                                                                                                  |            |                                                                                 |                        |                           |  |  |
|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------|-----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------|------------------------|---------------------------|--|--|
| SEE SHEET 1<br>EC NO: J2016-0832<br>DRWN: YMI ZUN002 2016/02/03<br>CHKD: K TAKAHASHI 2016/02/03<br>APPR: T KUSUHARA01 2016/02/12 | DESCRIPTION                                                | GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |           |            | DIMENSION STYLE<br>MM ONLY                                                                                                                       |            | SCALE<br>---                                                                    | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|                                                                                                                                  |                                                            | 0.25 UNDER                               | UNDER     | ± 0.03     | DRAWN BY                                                                                                                                         | DATE       | TITLE<br>1.0 FPC CONN ZIF SMT<br>WITH EMBSTP PKG<br>-LEAD FREE-<br><b>molex</b> |                        |                           |  |  |
|                                                                                                                                  |                                                            | 0.25 OVER                                | 0.5 UNDER | ± 0.05     | M.UMEDA                                                                                                                                          | 2005/03/03 |                                                                                 |                        |                           |  |  |
|                                                                                                                                  |                                                            | 0.5 OVER                                 | 1.0 UNDER | ± 0.1      | CHECKED BY                                                                                                                                       | DATE       | DOCUMENT NO.<br>SD-52207-065                                                    |                        |                           |  |  |
|                                                                                                                                  |                                                            | 1.0 OVER                                 | 10 UNDER  | ± 0.2      | K.TOYODA                                                                                                                                         | 2005/03/03 |                                                                                 |                        |                           |  |  |
|                                                                                                                                  |                                                            | 10 OVER                                  | 30 UNDER  | ± 0.25     | APPROVED BY                                                                                                                                      | DATE       | SHEET NO.<br>5 OF 5                                                             |                        |                           |  |  |
|                                                                                                                                  |                                                            | 30 OVER                                  |           | ± 0.3      | N.UKITA                                                                                                                                          | 2005/03/03 |                                                                                 |                        |                           |  |  |
|                                                                                                                                  |                                                            | ANGULAR ±1 °                             |           |            | MATERIAL NO.                                                                                                                                     |            | SEE CHART                                                                       |                        |                           |  |  |
|                                                                                                                                  | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                                          |           | SIZE<br>A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC<br>TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |            |                                                                                 |                        |                           |  |  |