




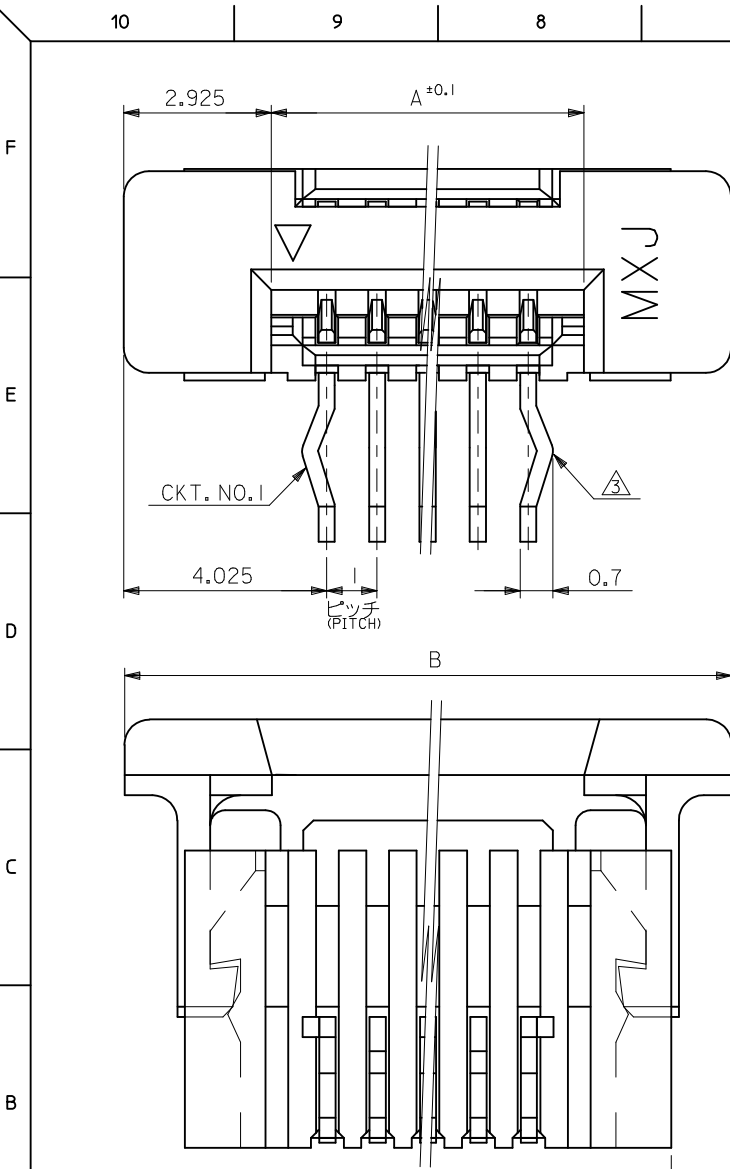

注記:
NOTES:
① CKT. NO. 1を基準に偶数番目のソルダータール。
EVEN NUMBER SOLDER TAIL.
② CKT. NO. 1を基準に奇数番目のソルダータール。
ODD NUMBER SOLDER TAIL.
③ ソルダータールキップは、△のソルダータールの両端部に設ける。
KINK TO BE APPLIED FOR THE BOTH END OF ODD NUMBER SOLDER TAIL.
4. 材 料: ターミナル: リン青銅、ニッケル下地 銅ビスマスマメッキ (t=0.32)
MATERIAL: TERMINAL: PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING (t=0.32)
ハウジング: 66ナイロン, UL94V-0
HOUSING: 66NYLON, UL94V-0
アクチュエーター: ポリエステル, UL94V-0
ACTUATOR: POLYESTER, UL94V-0
5. 本製品は 52043-**-10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52043-**-10.

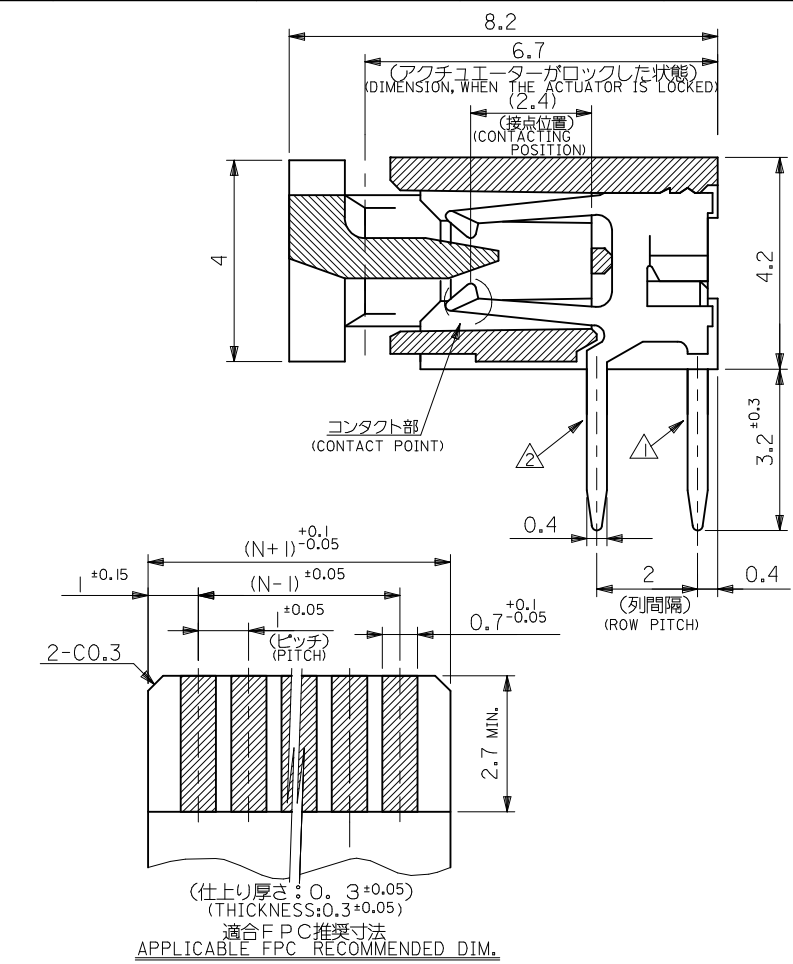

適合FPC推奨寸法
APPLICABLE FPC RECOMMENDED DIM.
FPCについて:
打抜き方向は導体側から補強板を推奨致します。補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。
ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT :
THERMOSETTING BONDING AGENT

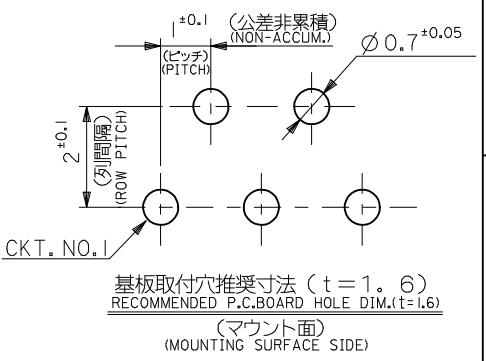

基板取付穴推奨寸法 (t=1.6) RECOMMENDED P.C. BOARD HOLE DIM. (t=1.6) (マウント面) (MOUNTING SURFACE SIDE)			
27.05	21.2	52043-2019	20
25.05	19.2	52043-1819	18
23.05	17.2	52043-1619	16
17.05	11.2	52043-1019	10
16.05	10.2	52043-0919	9
13.05	7.2	52043-0619	6
11.05	5.2	52043-0419	4
B	A	MATERIAL NO.	極数 CKT.
MODEL NO.		52043-**-19	

REVISED EC NO: J2016-1317 DRWN:YSHIBATA CHKD:Y01T0 APPR:Y01T0 A	DESCRIPTION 2016/06/29 2016/06/30 2016/06/30	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		0.25 UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 1.0 FPC CONN. Z.I.F R/A -LEAD FREE- molex				
		0.25 OVER	0.5 UNDER	± 0.05	YWADA	2004/05/19					
		0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY	DATE					
		1.0 OVER	10 UNDER	± 0.2	MSASAO	2004/05/19	-LEAD FREE- molex				
		10 OVER	30 UNDER	± 0.25	APPROVED BY	DATE					
		30 OVER		± 0.3	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	ANGULAR ±3 °			SEE TABLE			SD-52043-002			1 OF 1	
REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					