

10

9

8

7

6

5

4

3

2


1

トレードマーク
TRADE MARK


ハウジング
HOUSING

アクチュエータ
ACTUATOR



回路番号 1 用マーク
CKT. NO.1 MARK

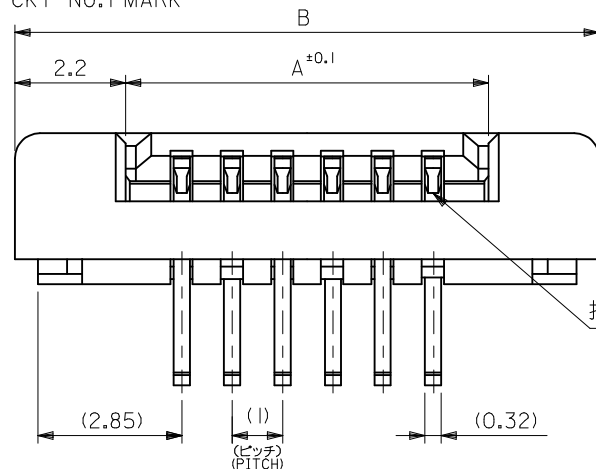

接点部 (上面)
CONNECT POINT
(UPPER SURFACE)

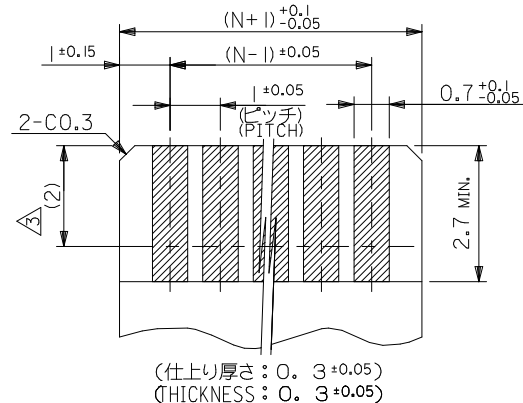

(仕上り厚さ: 0.3±0.05)
(THICKNESS: 0.3±0.05)
適合 FPC 推奨寸法
APPLICABLE FPC
RECOMMENDED DIM.

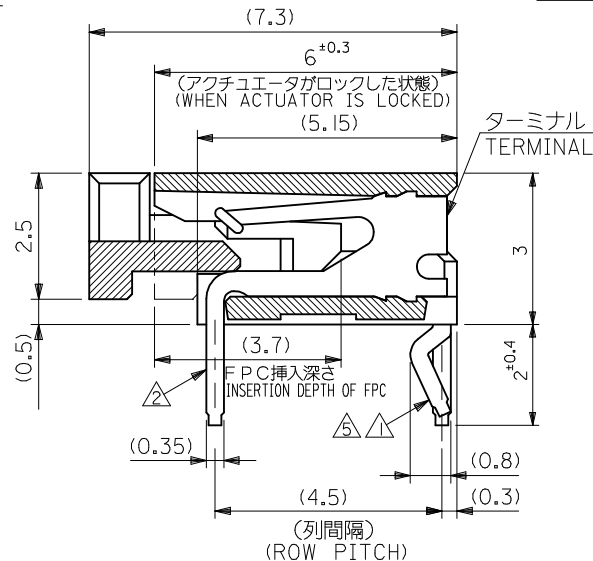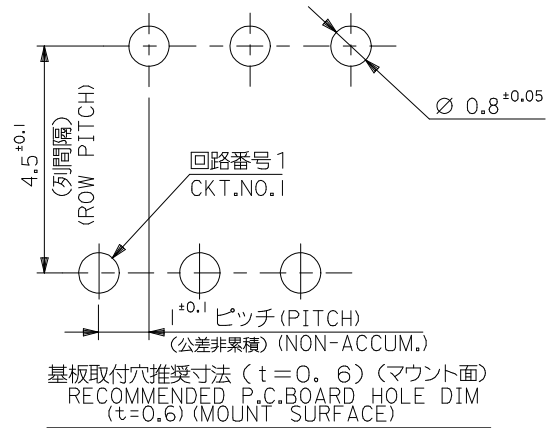

25.6	21.2	52089-2019	20
21.6	17.2	52089-1619	16
20.6	16.2	52089-1519	15
15.6	11.2	52089-1019	10
14.6	10.2	52089-0919	9
13.6	9.2	52089-0819	8
12.6	8.2	52089-0719	7
10.6	6.2	52089-0519	5
9.6	5.2	52089-0419	4
B	A	MATERIAL NO.	極数 CKT.

注記 NOTES

- △ CKT. NO. 1 を基準に偶数番目のソルダータール。
EVEN NUMBER SOLDER TAIL
- △ CKT. NO. 1 を基準に奇数番目のソルダータール。
ODD NUMBER SOLDER TAIL
- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
4. 使用材料 MATERIAL
ハウジング : 66 ナイロン, UL94V-0
HOUSING : 66 NYLON, UL94V-0
アクチュエータ : ポリエステル, UL94V-0
ACTUATOR : POLYESTER, UL94V-0
ターミナル : リン青銅, ニッケル下地 錫・ビスマスメッキ
TERMINAL : PHOS-BRO.TIN-BISMUTM OVER NICKEL-PLATED
- △ キングはソルダータール△の両端のみに適用。
KINK APPLIES BOTH SIDE △ TERMINALS ONLY
6. 本製品は 52089-**10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52089-**10.

REVISED	EC NO.: J2016-1317 DRWN:YSHI BATA CHKD:Y0110 APPR:Y0110	2016/06/29 2016/06/30 2016/06/30	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				0.25	UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 1.0 FPC CONN ZIF R/A			
				0.25	OVER	0.5	UNDER	± 0.05	J. SASAMO			2004/7/22	
				0.5	OVER	1.0	UNDER	± 0.1	CHECKED BY	DATE		-LEAD FREE- molex	
				1.0	OVER	10	UNDER	± 0.2	K. TOJO	2004/7/22			
				10	OVER	30	UNDER	± 0.25	APPROVED BY	DATE		DOCUMENT NO. SD-52089-001	
				30	OVER		± 0.3	N. UKITA	2004/7/22				
				ANGULAR			±3 °	MATERIAL NO. 52089-**19		SHEET NO. 1 OF 1			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				REV									

9

8

7

6

5

4

3

2

1