

10

9

8

7

6

5

4

3

2


1

トレードマーク
TRADE MARK


ハウジング
HOUSING

アクチュエータ
ACTUATOR



回路番号 1 用マーク
CKT. NO.1 MARK

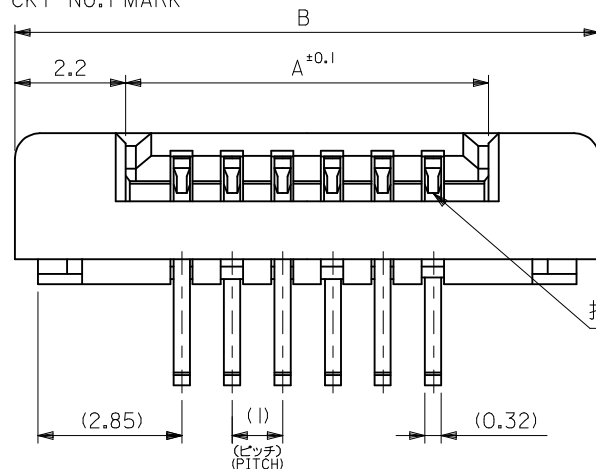

接点部 (上面)
CONNECT POINT
(UPPER SURFACE)

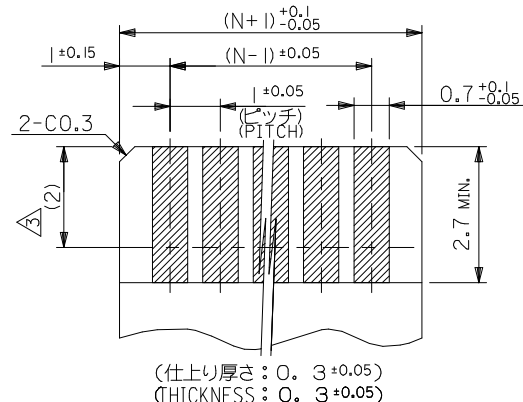

(仕上り厚さ: 0.3±0.05)
(THICKNESS: 0.3±0.05)
適合 FPC 推奨寸法
APPLICABLE FPC
RECOMMENDED DIM.

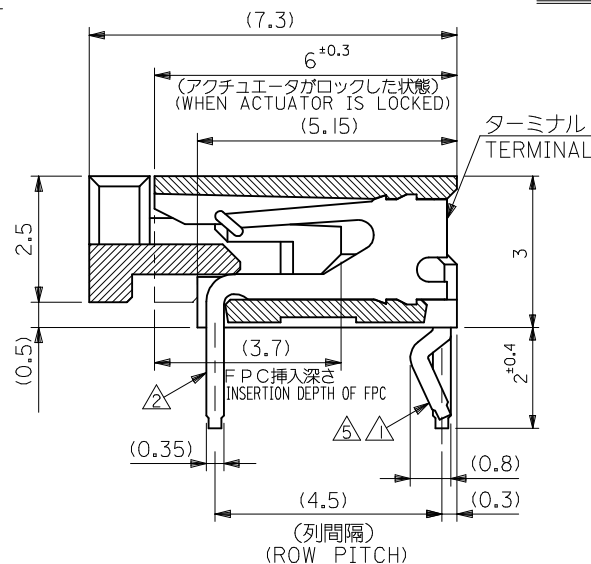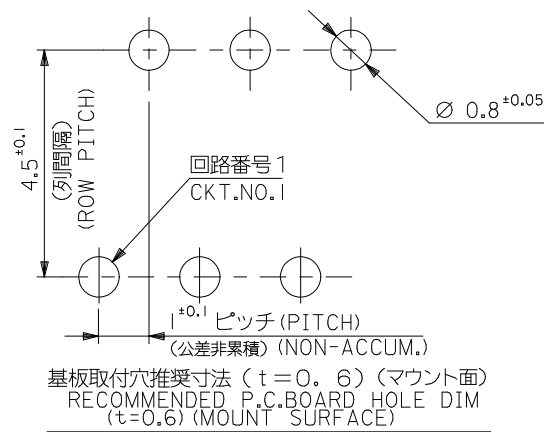

ターミナル
TERMINAL

注記 NOTES

- △ CKT. NO. 1 を基準に偶数番目のソルダータール。
EVEN NUMBER SOLDER TAIL
- △ CKT. NO. 1 を基準に奇数番目のソルダータール。
ODD NUMBER SOLDER TAIL
- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
4. 使用材料 MATERIAL
ハウジング : 66 ナイロン, UL94V-0
HOUSING : 66 NYLON, UL94V-0
アクチュエータ : ポリエステル, UL94V-0
ACTUATOR : POLYESTER, UL94V-0
ターミナル : リン青銅, ニッケル下地 錫・ビスマスメッキ
TERMINAL : PHOS-BRO.TIN-BISMUTM OVER NICKEL-PLATED
- △ キングはソルダータール△の両端のみに適用。
KINK APPLIES BOTH SIDE △ TERMINALS ONLY
6. 本製品は 52089-**10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52089-**10.

25.6	21.2	52089-2019	20
21.6	17.2	52089-1619	16
20.6	16.2	52089-1519	15
15.6	11.2	52089-1019	10
14.6	10.2	52089-0919	9
13.6	9.2	52089-0819	8
12.6	8.2	52089-0719	7
10.6	6.2	52089-0519	5
9.6	5.2	52089-0419	4
B	A	MATERIAL NO.	極数 CKT.

REVISED EC NO: J2016-1317 DRAWN: YSH BATA CHKD: Y01 TO APPR: Y01 TO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 1.0 FPC CONN ZIF R/A				
		0.25 OVER	0.5 UNDER	±0.05	J. SASAMO	2004/7/22					
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE	-LEAD FREE- molex				
		1.0 OVER	10 UNDER	±0.2	K. TOJO	2004/7/22					
		10 OVER	30 UNDER	±0.25	APPROVED BY	DATE	DOCUMENT NO. SD-52089-001				
		30 OVER		±0.3	N. UKITA	2004/7/22					
		ANGULAR ±3 °			MATERIAL NO. 52089-**19		SHEET NO. 1 OF 1				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3						
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

9

8

7

6

5

4

3

2

1