


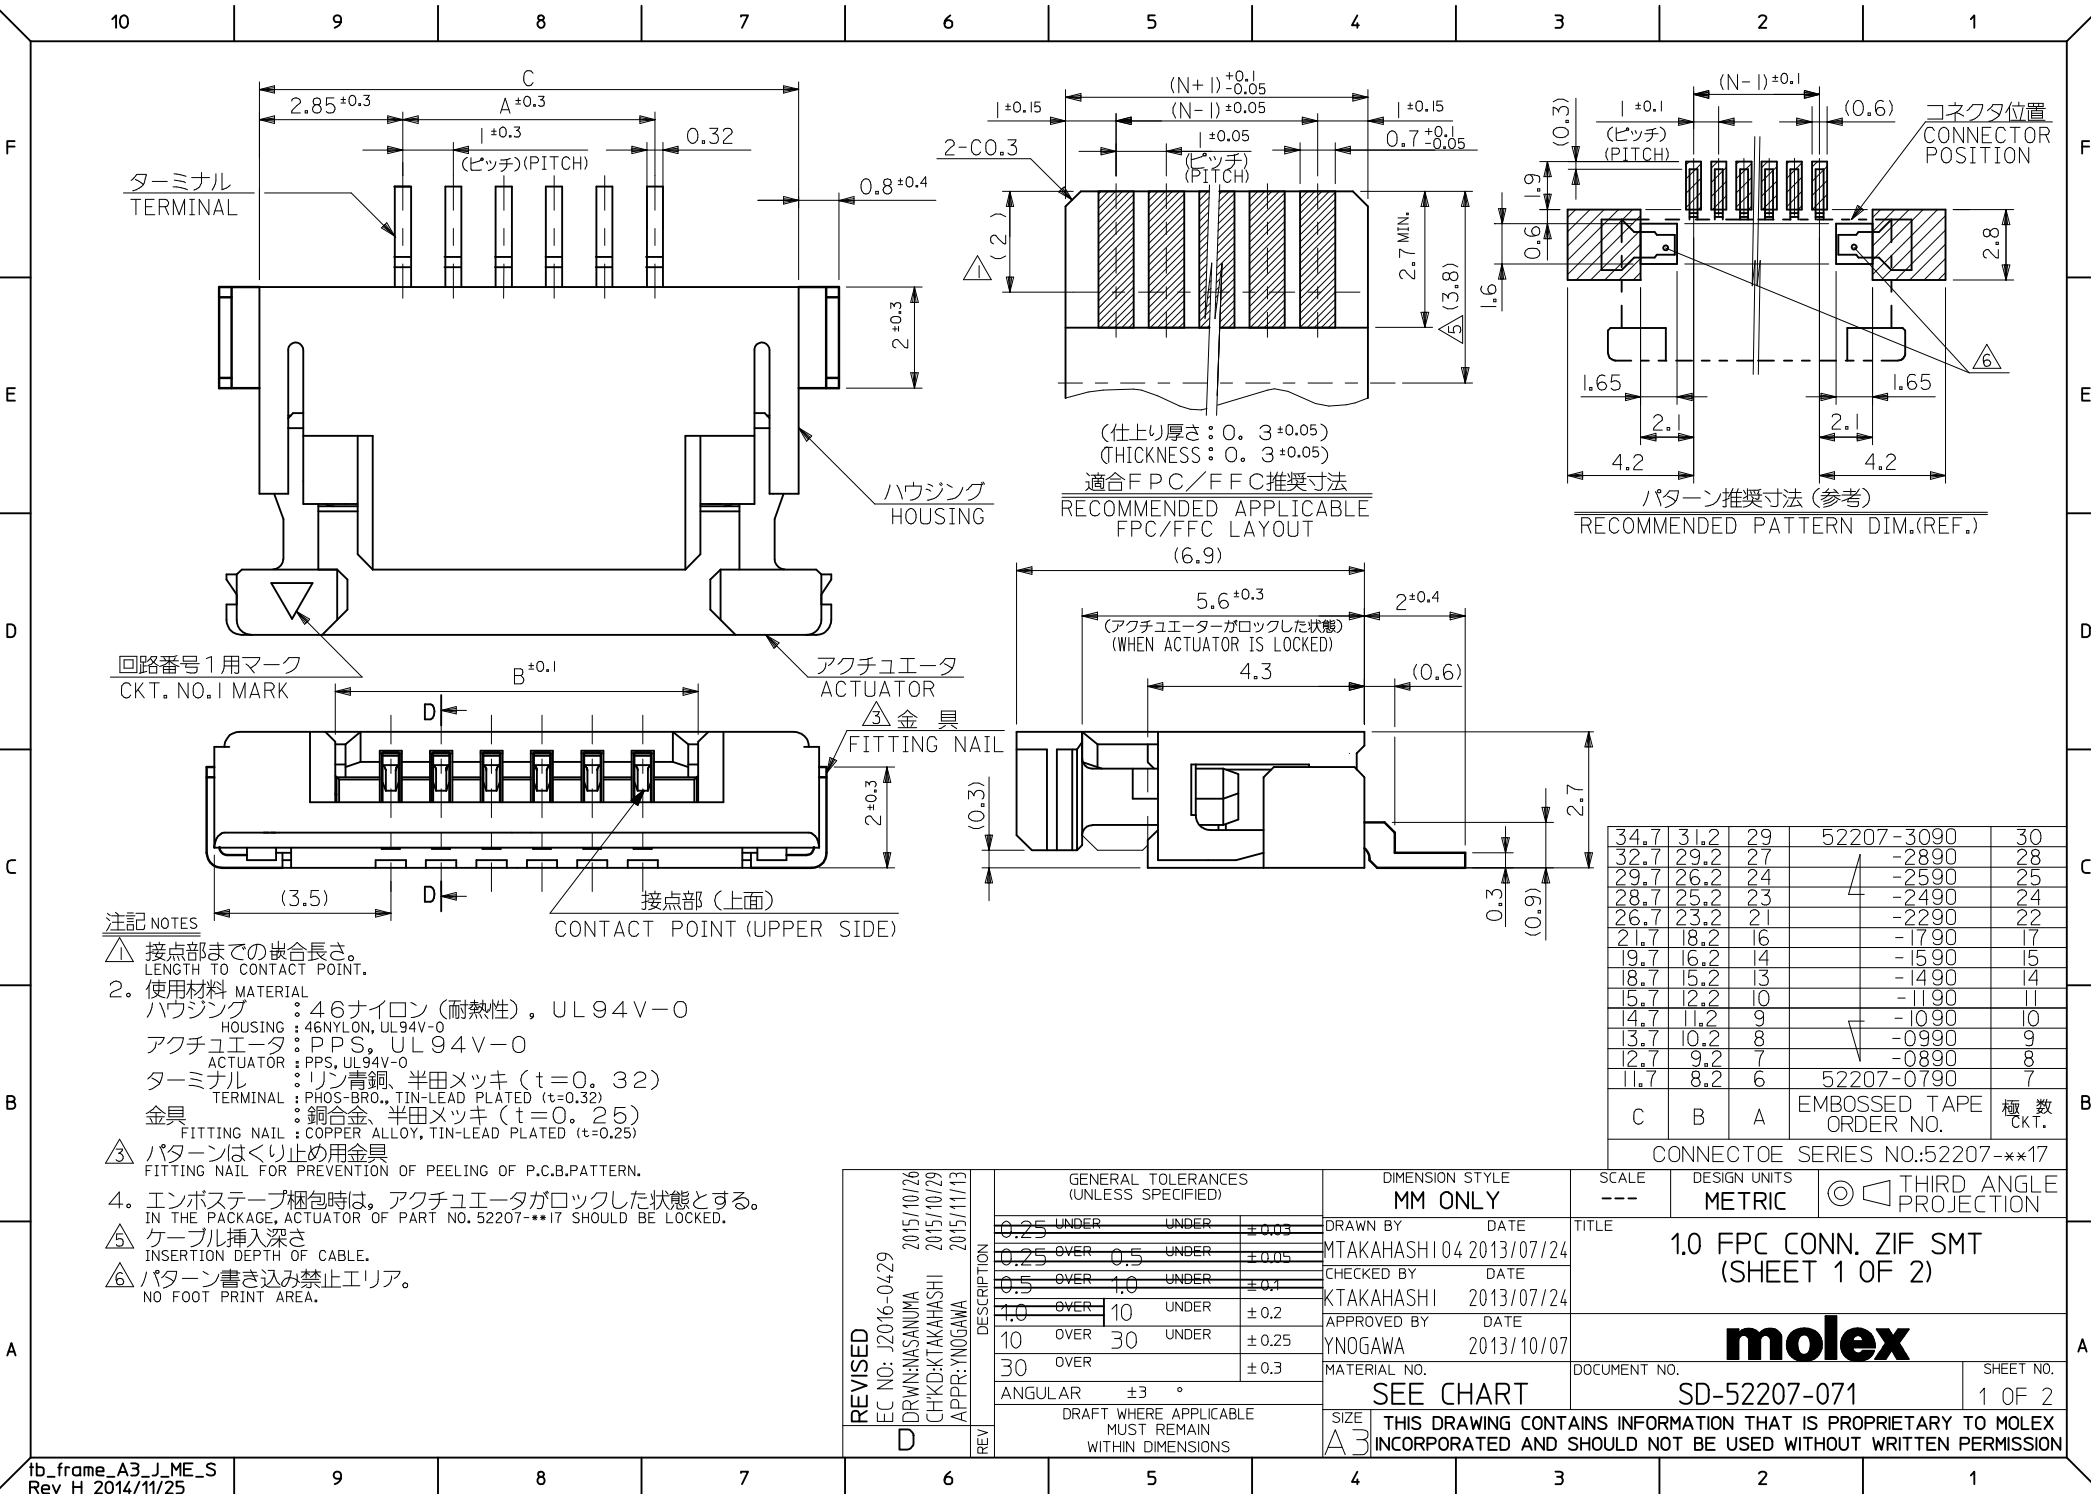

- 注記 NOTES
- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
 - 使用材料 MATERIAL
ハウジング : 46ナイロン (耐熱性), UL 94V-0
アクチュエータ : PPS, UL 94V-0
ターミナル : リン青銅、半田メッキ (t=0.32)
金具 : 銅合金、半田メッキ (t=0.25)
FITTING NAIL : COPPER ALLOY, TIN-LEAD PLATED (t=0.25)
 - △ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
 4. エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO. 52207-**17 SHOULD BE LOCKED.
 - △ ケーブル挿入深さ
INSERTION DEPTH OF CABLE.
 - △ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.

34.7	31.2	29	52207-3090	30
32.7	29.2	27	-2890	28
29.7	26.2	24	-2590	25
28.7	25.2	23	-2490	24
26.7	23.2	21	-2290	22
21.7	18.2	16	-1790	17
19.7	16.2	14	-1590	15
18.7	15.2	13	-1490	14
15.7	12.2	10	-1190	11
14.7	11.2	9	-1090	10
13.7	10.2	8	-0990	9
12.7	9.2	7	-0890	8
11.7	8.2	6	52207-0790	7
C	B	A	EMBOSSD TAPE ORDER NO.	極数 CKT.

REVISED		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: J2016-0429		0.25 UNDER UNDER ±0.03		MM ONLY		---		METRIC		◎ □	
DRWN: SANUMA		0.25 OVER 0.5 UNDER ±0.05		DRAWN BY DATE		TITLE		1.0 FPC CONN. ZIF SMT		SHEET NO.	
CHKD: TAKAHASHI		0.5 OVER 1.0 UNDER ±0.1		CHECKED BY DATE		MTAKAHASHI 104 2013/07/24		(SHEET 1 OF 2)		1 OF 2	
APPR: YNOGAWA		1.0 OVER 10 UNDER ±0.2		APPROVED BY DATE		TAKAHASHI 2013/07/24		molex		SD-52207-071	
REV		10 OVER 30 UNDER ±0.25		MATERIAL NO.		2013/10/07		DOCUMENT NO.		SEE CHART	
D		ANGULAR ±3 °		SIZE		A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

10 9 8 7 6 5 4 3 2 1

F


E

D


C

B

A

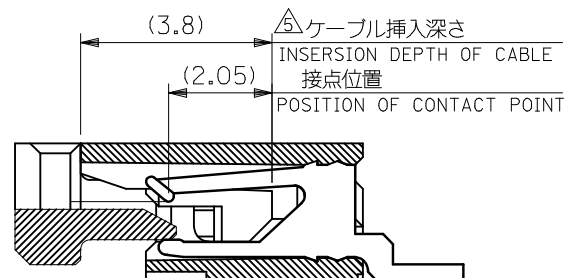

断面D-D
SECT.D-D

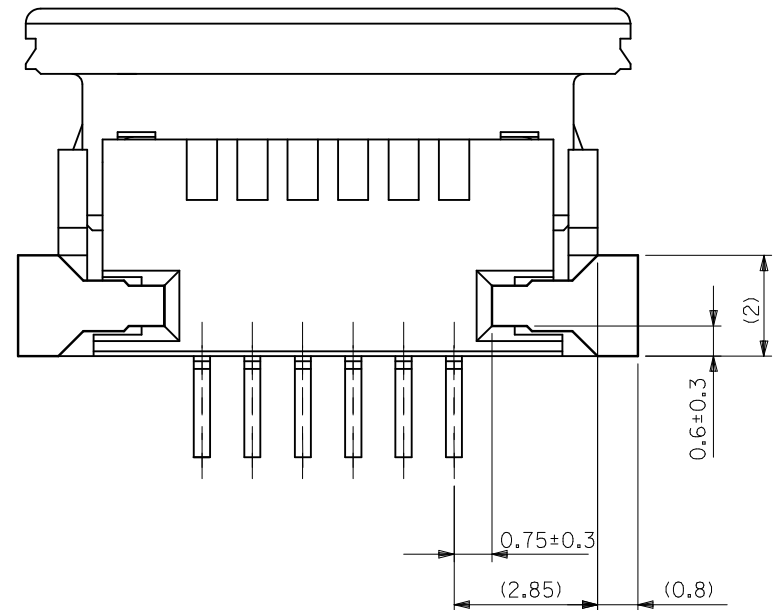

下面図
BOTTOM VIEW

9

8

7

6

5

4

3

2

1

REVISED EC NO: J2016-0429 DRWN: SANUMA 2015/10/26 CHKD: TAKAHASHI 2015/10/29 APPR: YNOGAWA 2015/11/13	DESCRIPTION D	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION					
		0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 1.0 FPC CONN ZIF SMT SHEET 2 OF 2							
		0.25 OVER	0.5 UNDER	±0.05	CHECKED BY KTAKAHASHI							DATE 2013/07/24		
		0.5 OVER	1.0 UNDER	±0.1										
		1.0 OVER	10 UNDER	±0.2	APPROVED BY YNOGAWA		DATE 2013/10/07		molex					
		10 OVER	30 UNDER	±0.25										
		30 OVER		±0.3	MATERIAL NO.									
		ANGULAR ±3 °												SEE SHEET 1 OF 2
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SD-52207-071									
										SHEET NO. 2 OF 2				
</														

F

E

D

C

B

A

SECT:V-V

24mm 幅 キャリアテープ
24mm WIDTH CARRIER TAPE

DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
UNDER	+0.03	DRAWN BY DATE	TITLE EMBOSSSED TAPE PACKAGE FOR 52207-**17 SHEET 1 OF 3			
UNDER	+0.05	MTAKAHASHI 04 2013/07/24				
UNDER	+0.1	CHECKED BY DATE	molex			
UNDER	+0.2	KTAKAHASHI 03 2013/07/24				
UNDER	+0.25	APPROVED BY DATE	SD-52207-072			
UNDER	+0.3	YNOGAWA 2013/10/07				
MATERIAL NO.		DOCUMENT NO.			SHEET NO.	
SEE CHART		SD-52207-072			1 OF 3	
SIZE A 3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

REVISED	EC NO. J2016-0429	2015/10/26	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	DRWN:NASUNJWA	2015/10/29	0.25	UNDER	UNDER	+0.03
	CHKD:KATAKASHI	2015/11/13	0.25	OVER	0.5 UNDER	+0.05
	APPR:YNOGAWA		0.5	OVER	1.0 UNDER	+0.1
			1.0	OVER	10 UNDER	± 0.2
			10	OVER	30 UNDER	± 0.25
			30	OVER		± 0.3
			ANGULAR ±3 °			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
		REV				

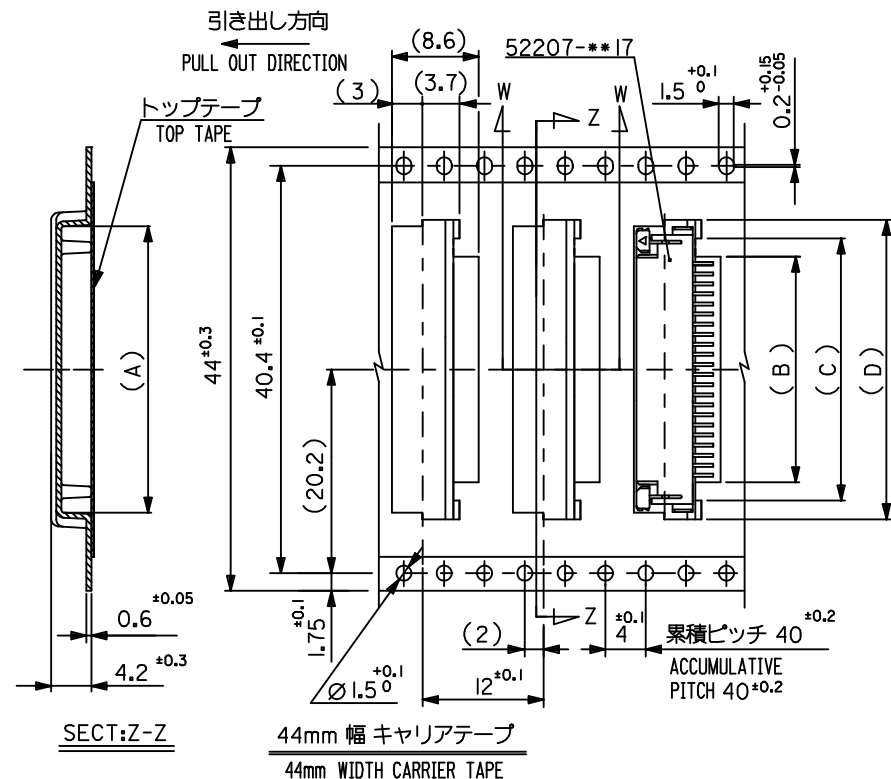


Diagram showing a cross-section of a beam with a central hole. The dimensions are labeled as follows:




- Overall width: (6)
- Hole diameter: (0.8)
- Overall height: (3)
- Hole depth: (0.6)

SECT:W-W


REVISED	EC NO: J2016-0429	2015/10/26	DRWN:NASUNIMA	2015/10/29	CHK:DKTAKAHASHI	2015/11/13	APPR:YNOGAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY			SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	D	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			0.25 UNDER	UNDER		±0.03	DRAWN BY	DATE	TITLE EMBOSSD TAPE PACKAGE FOR 52207-**17 SHEET 2 OF 3 molex					
						0.25 OVER	0.5 UNDER		±0.05	MTAKAHASHI	104 2013/07/24						
						0.5 OVER	1.0 UNDER		±0.1	CHECKED BY	DATE						
						1.0 OVER	10 UNDER		±0.2	KTAKAHASHI	2013/07/24						
						10 OVER	30 UNDER		±0.25	APPROVED BY	DATE						
						30 OVER			±0.3	YNOGAWA	2013/10/07						
			ANGULAR			±3 °	SEE CHART			DOCUMENT NO.		SHEET NO.					
									SD-52207-072		2 OF 3						
								SIZE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

引き出し方向
PULL OUT
DIRECTION



DETAIL "F"

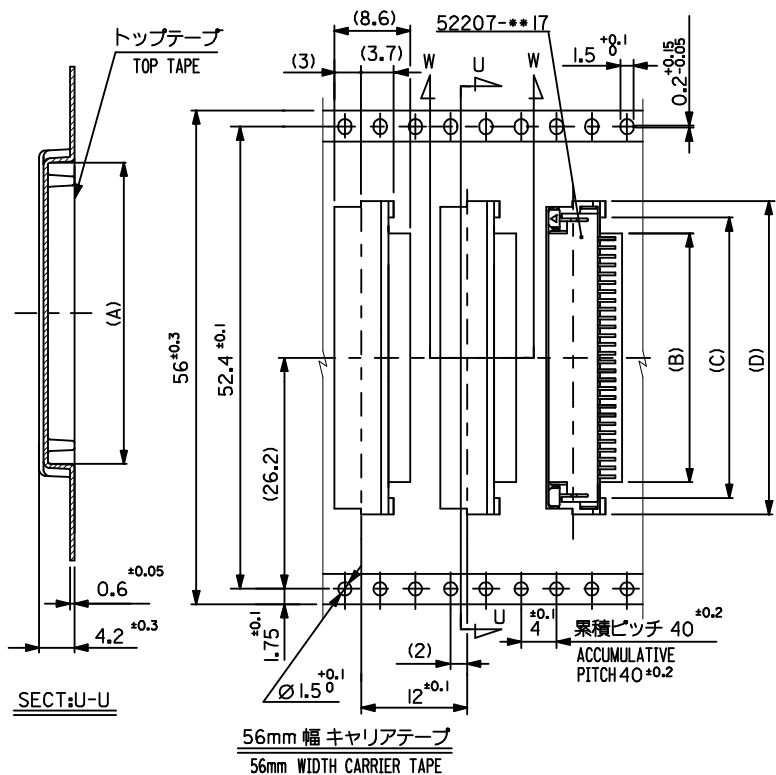

注記


1. 製品番号 52207-***17 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52207-071 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO.52207-***17 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52207-071

2. 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL


3. リードテープ長さ(LEAD TAPE LENGTH)

トップテープ TOP TAPE
リーダー部 LEADER PART

トップテープ TOP TAPE
未接着部 NON-BONDED PART

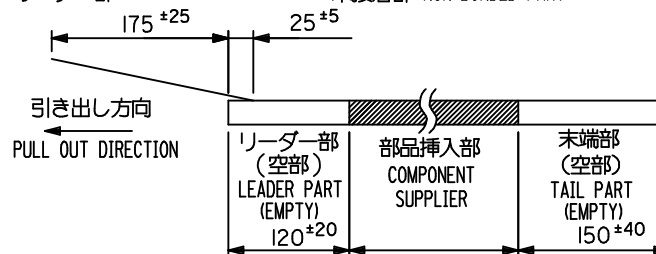

4. トップテープの剥離強度 : (剥離方向は下図参照)
60gf MAX. 尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)
PEELING OFF FORCE OF TOP TAPE : 60gf MAX. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT. (PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.)



5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)

トップテープ (TOPTAPE) : PET, PE, PEF

リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>

POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

56	57.5	37.5	34	30.7	36.35	52207-3090	30
		35.5	32	28.7	34.35	52207-2890	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	EMBOSSED PACKAGE ORDER NO.	極致 CKT.

REVISED	EC NO: J2016-0429	DRAWN:ASAJIWA	2015/10/26	CHKD:KTAKAHASHI	2015/10/29	APPR:YNOGAWA	2015/11/13	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
								0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 3 OF 3 molex			
								0.25 OVER	0.5 UNDER	±0.05	MTAKAHASHI	104 2013/07/24				
								0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE				
								1.0 OVER	10 UNDER	±0.2	KTAKAHASHI	2013/07/24				
								10 OVER	30 UNDER	±0.25	APPROVED BY	DATE	DOCUMENT NO. SD-52207-072			
								30 OVER		±0.3	YNOGAWA	2013/10/07				
								ANGULAR ±3 °			MATERIAL NO.					
								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART					
								REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			