


10	9	8	7	6	5	4	3	2	1
CONNECTOR P/N	ØD(mm)	K (KEY)	TYPE OF FIT	CABLE DIAMETER (mm)					
106056-2000	.1255	.083 2.1	STANDARD	3					
106055-2000		.0785 2.0	TIGHT						
106056-4000	.125	.083 2.1	STANDARD						
106055-4000		.0785 2.0	TIGHT						
106056-5000	.126	.083 2.1	STANDARD	2.4					
106055-5000		.0785 2.0	TIGHT						
106056-5300		.083 2.1	STANDARD						

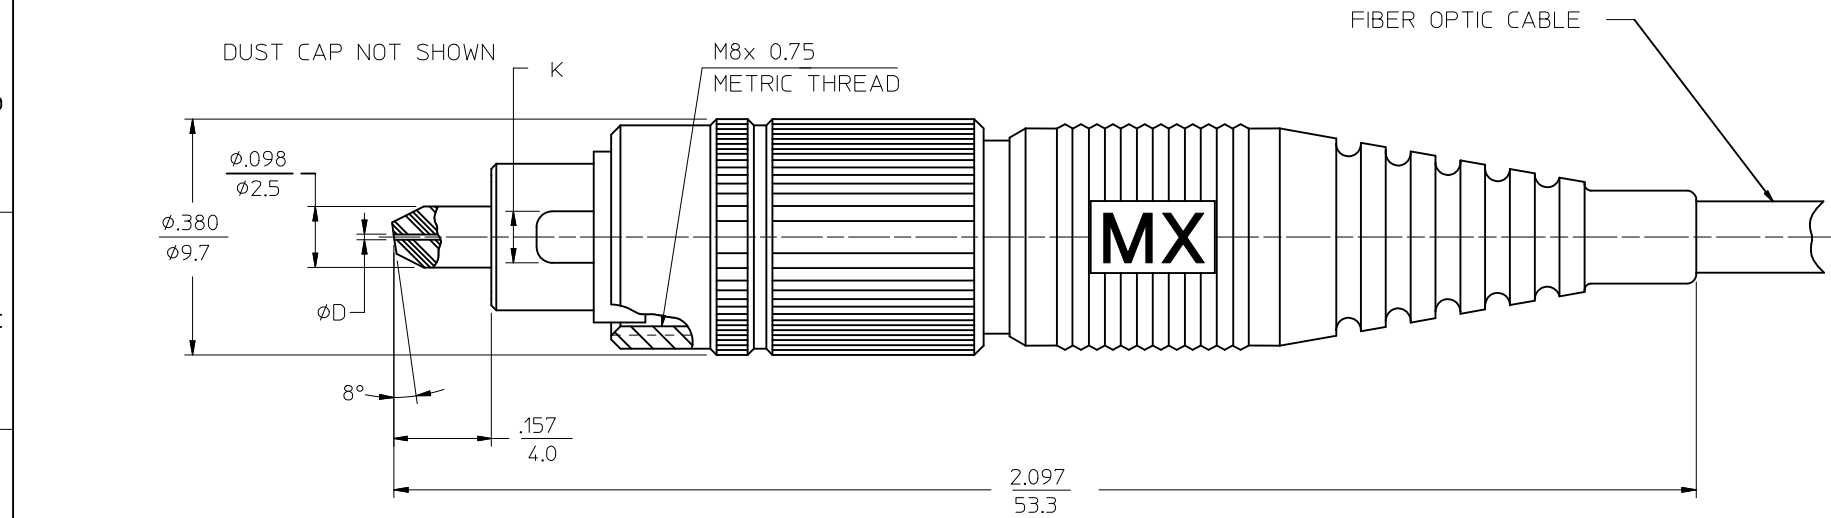

ENTER DESCRIPTION EC NO: MF2010-0066 DRW:KPEVZNER CHKD: 2009/08/13 APP: LGUMIN 2009/08/17	DESCRIPTION	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
A1	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-10605X-XX00		SHEET NO. 1 OF 01		
					SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				