

10

9

8

7

6

5

4

3

2




1

MAT'L NO.

ENG NO.

15-24-4557

A-8981-4V4-LF

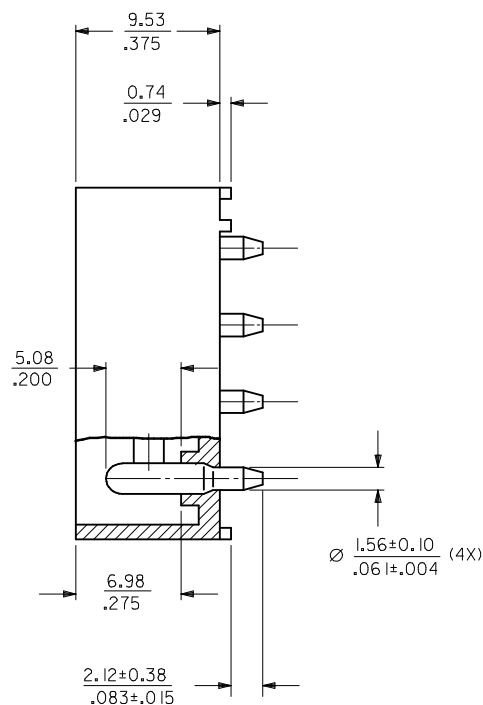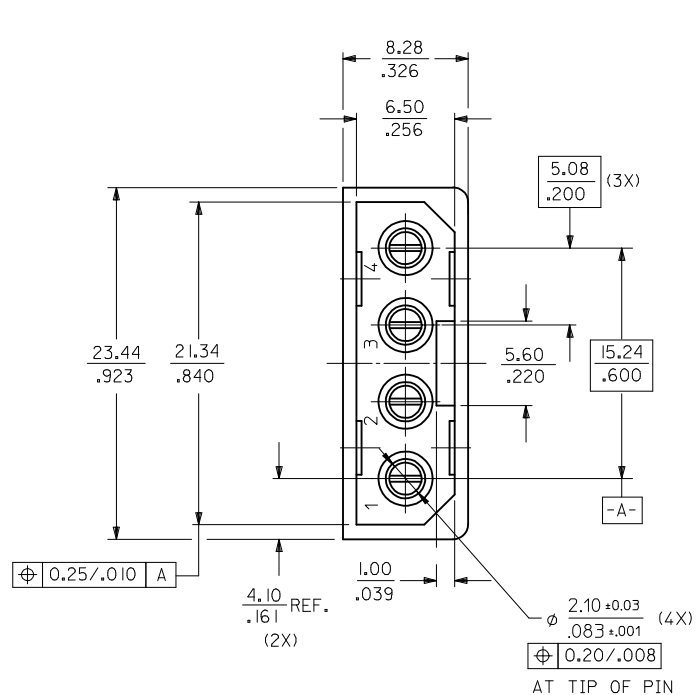

RECOMMENDED PCB HOLE LAYOUT

NOTES :

1. PLATING
POSTPLATE 0.00254/.000100 MIN. TIN
OVER 0.00127/.000050 MIN. NICKEL OVERALL.
2. PART TO MATE WITH HOUSING 8981-4P2
AND TERMINAL 8980-3*.
3. PRODUCT SPEC PS-8981-4V4/4R1-P APPLIES.
4. MATERIAL:
HOUSING - PCT, GLASS FILLED, UL94V-0
COLOR BLACK
TERMINAL - PHOS BRONZE

ADD CKT INDICATION EC NO: S2009-0836 DRWN:SKANG CHKD:ATSEE APPR:MLONG D1	2009/05/08 2009/05/08 2009/05/11	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	POWER CONNECTOR, 4 CKTS VERTICAL MOUNT MOLEX INCORPORATED SD-8981-4V4	SHEET NO. 1 OF 1	
				4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY SKTOH	DATE 1991/03/25	TITLE				
					± ---	± ---	CHECKED BY GWANG	DATE 1991/03/28					
					± ---	± .008	APPROVED BY RWONG	DATE 1991/03/28					
					± 0.20	± ---	MATERIAL NO. SEE TABLE						DOCUMENT NO. SD-8981-4V4
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				ANGULAR ± 3 °									