

10

9

8

7

6

5

4

3

2




1

MAT'L NO.

ENG NO.

15-24-4745

A-8981-4V5-LF

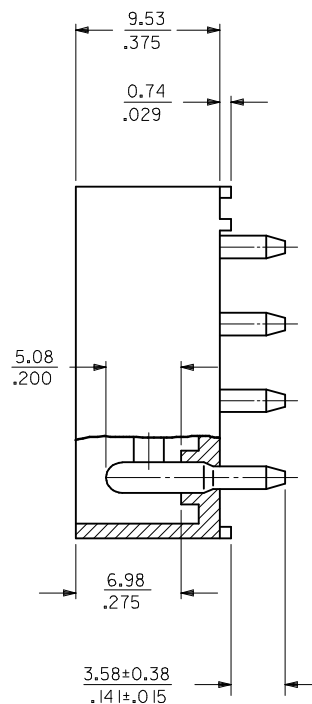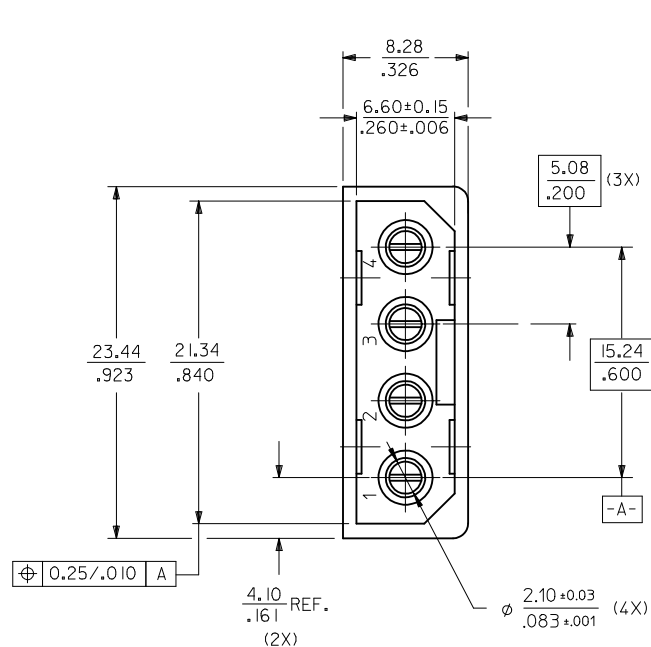

RECOMMENDED PCB HOLE LAYOUT

NOTES :

1. PLATING
POSTPLATE 0.00254/.000100 MIN. TIN
OVER 0.00127/.000050 MIN. NICKEL OVERALL.
2. PART TO MATE WITH HOUSING 8981-4P2
AND TERMINAL 8980-3*.
3. PRODUCT SPEC PS-8981-4V4/4R1-P APPLIES.
4. MATERIAL:
HOUSING - PCT, GLASS FILLED, UL94V-0
COLOR BLACK
TERMINAL - PHOS BRONZE

ADD CKT INDICATION EC NO: S2009-0836 DRWN:SKANG CHKD:ATSEE APPR:MLONG	2009/05/08 2009/05/08 2009/05/11	DESCRIPTION E1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
						DRAWN BY SKT0H	DATE 1991/10/17	TITLE POWER CONNECTOR, 4 CKTS VERTICAL MOUNT			
						CHECKED BY MLA1	DATE 1991/10/17				
						APPROVED BY RWONG	DATE 1991/10/18				
				ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-8981-4V5			
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					