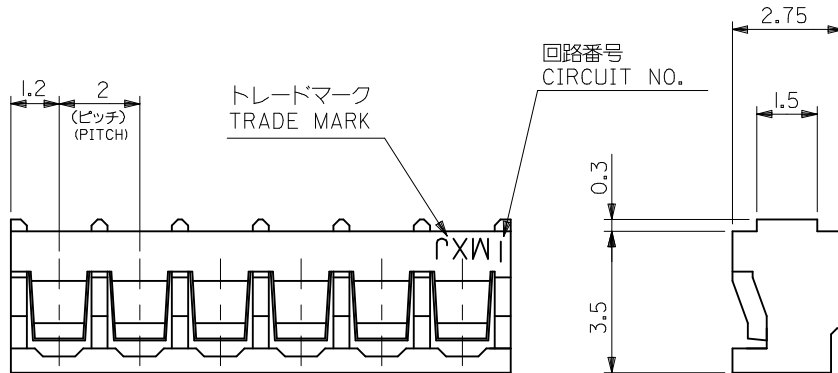



基板取付穴推奨寸法

(基板厚: $t=1 \sim 1.6$ mm)
RECOMMENDED PC BOARD
HOLE DIMENSION
(THICKNESS: $t=1 \sim 1.6$ mm)

注記

- △ 適合ターミナル: 50034 8*00
APPLICABLE TERMINAL: 50034 8*00
2. 材料 ハウジング: ポリアミド, UL94V-0
色: ナチュラル(白)
MATERIAL HOUSING: POLYAMIDE, UL94V-0
COLOR: NATURAL(WHITE)
3. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.

28	30.4	51015	1500	15
26	28.4	↑	1400	14
24	26.4		1300	13
22	24.4		1200	12
20	22.4		1100	11
18	20.4		1000	10
16	18.4		0900	9
14	16.4		0800	8
12	14.4		0700	7
10	12.4		0600	6
8	10.4		0500	5
6	8.4		0400	4
4	6.4		0300	3
2	4.4	51015	0200	2
B	A	ORDER No.	NO. OF CKT	

REVISED EC NO: J2012-0968 2012/01/18 DRWN:KASHIO 2013/04/09 CHKD:KASAKAWA APPR:Y01TO 2013/04/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 8:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		10 UNDER	±0.2	DRAWN BY HIJIMA	DATE 1996/05/28	TITLE 2.0 BOARD IN CONN HSG					
		10 OVER 30 UNDER	±0.25	CHECKED BY MFUKUSHIMA	DATE 1996/05/28						
		30 OVER	±0.3	APPROVED BY		DATE	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-51015-**00		1 OF 1			
	REV		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								