


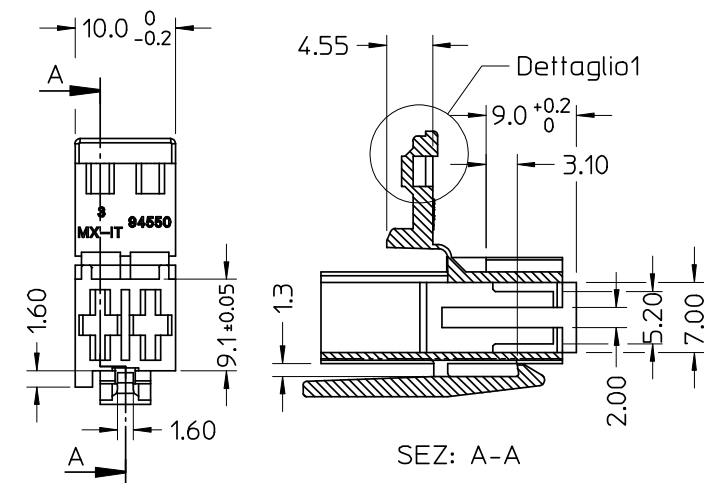


10 9 8 7 6 5 4 3 2 1



CONFIGURAZIONE POLARIZZAZIONI
POLARIZATION CONFIGURATION



NOTE:




- USATO CON TERMINALE 94518-0XXX E 94549-0XXX
- SPECIFICA DI RIFERIMENTO PER IL CONNETTORE PS-94550-001
- PER CARATTERISTICHE DI CRIMPATURA RIF. SD-94518-005 E SD-94549-001
- FORZA DI DISACCOPIAMENTO CONNETTORE (TRAZIONANDO DAI CAVI SENZA AZIONARE L'AGGANCIO): 40 N MIN.
- SPESSORE MINIMO PARETI CONNETTORE 0.40 mm.

NOTE:

- USED WITH TERMINALS 94518-0XXX AND 94549-0XXX
- REFER TO PS-94550-001 FOR CONNECTOR SPECIFICATION
- REFER TO SD-94518-005 AND SD-94549-001 FOR CRIMPING CHARACTERISTICS
- CONNECTOR DISENGAGEMENT FORCE (PULLING BY THE WIRES, WITHOUT ACTUATING THE LATCH): 40 N MIN.
- MINIMUM CONNECTOR WALL THICKNESS 0.40 mm.

CONFEZIONE: Box da 3500 Pz.

PACKAGING: 3500 pcs in carton box

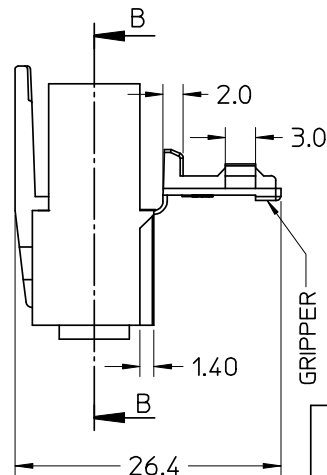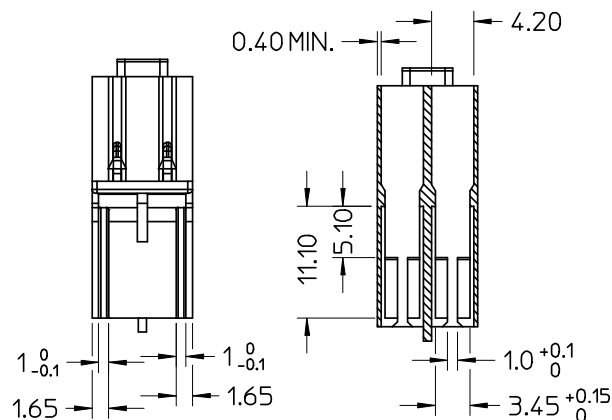

* AGENCY
RECOGNIZATIONS
CSA (file LR19980)
UL (file E-29179)

P/N	MATERIAL/COLOR
* 94550-9102	NYLON 6.6 V0 NATURAL
94550-8102	NYLON 6.6 V2 NATURAL
94550-4102	NYLON 6.6 GWT 750°C sec.IEC 60335-1 TEST METHOD IEC 60695-2-11 NATURAL

SPQ = 3500

Std. Descr.: 'HSG W/SEC LOCK AND LATCH 2CKT _____ COLOR'

EC NO: Z2006-0038 DRWN:FGOTTARD2005/09/21 CHKD:RSANDAN2005/09/21 APPR:GZUIN 2005/09/21	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS METRIC	 FIRST ANGLE PROJECTION	REVISE ON CAD ONLY	
		 - 0  - 0			DIMENSION STYLE MM ONLY		TITLE HSG 2 CKT WITH SEC.LOCK AND EXTERNAL LATCH		
			4 PLACES	± ---	± ---	DRAWN BY FGOTTARD 2002/06/27		DATE	
			3 PLACES	± ---	± ---				
			2 PLACES	± 0.10	± ---	CHECKED BY MTESTAGU 2002/06/27		DATE	
			1 PLACE	± 0.2	± ---				
ANGULAR ± 2 °		APPROVED BY GZUIN 2002/06/27		DATE	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-94550-006	SHEET NO. 1 OF 1		
DRAFT WHERE APPLICABLE		MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
A6	REV		A3						