


10		9		8		7		6		5		4		3		2		19203		F
MATERIAL NUMBER	ENGINEERING NUMBER	WIRE RANGE AWG	TAPED MATERIAL NUMBER	TAPED ENGINEERING NUMBER	T MAX	B MAX	F MIN	L MAX	E MIN	D1 MIN	D MAX	H NOMINAL								
192030373	192030373	16-14	192030467	192030373T	.030/.75	.239/6.06	.252/6.40	.587/14.92	.173/4.40	.083/2.10	.138/3.50	1.184/30.07								
192030390	192030390	16-14	192030469	192030390T	.030/.75	.302/7.66	.307/7.80	.666/16.92	.173/4.40	.083/2.10	.138/3.50	1.184/30.07								
192030379	192030379	12-10	192030468	192030379T	.030/.75	.302/7.66	.307/7.80	.706/17.92	.213/5.40	.130/3.30	.185/4.70	1.235/31.37								

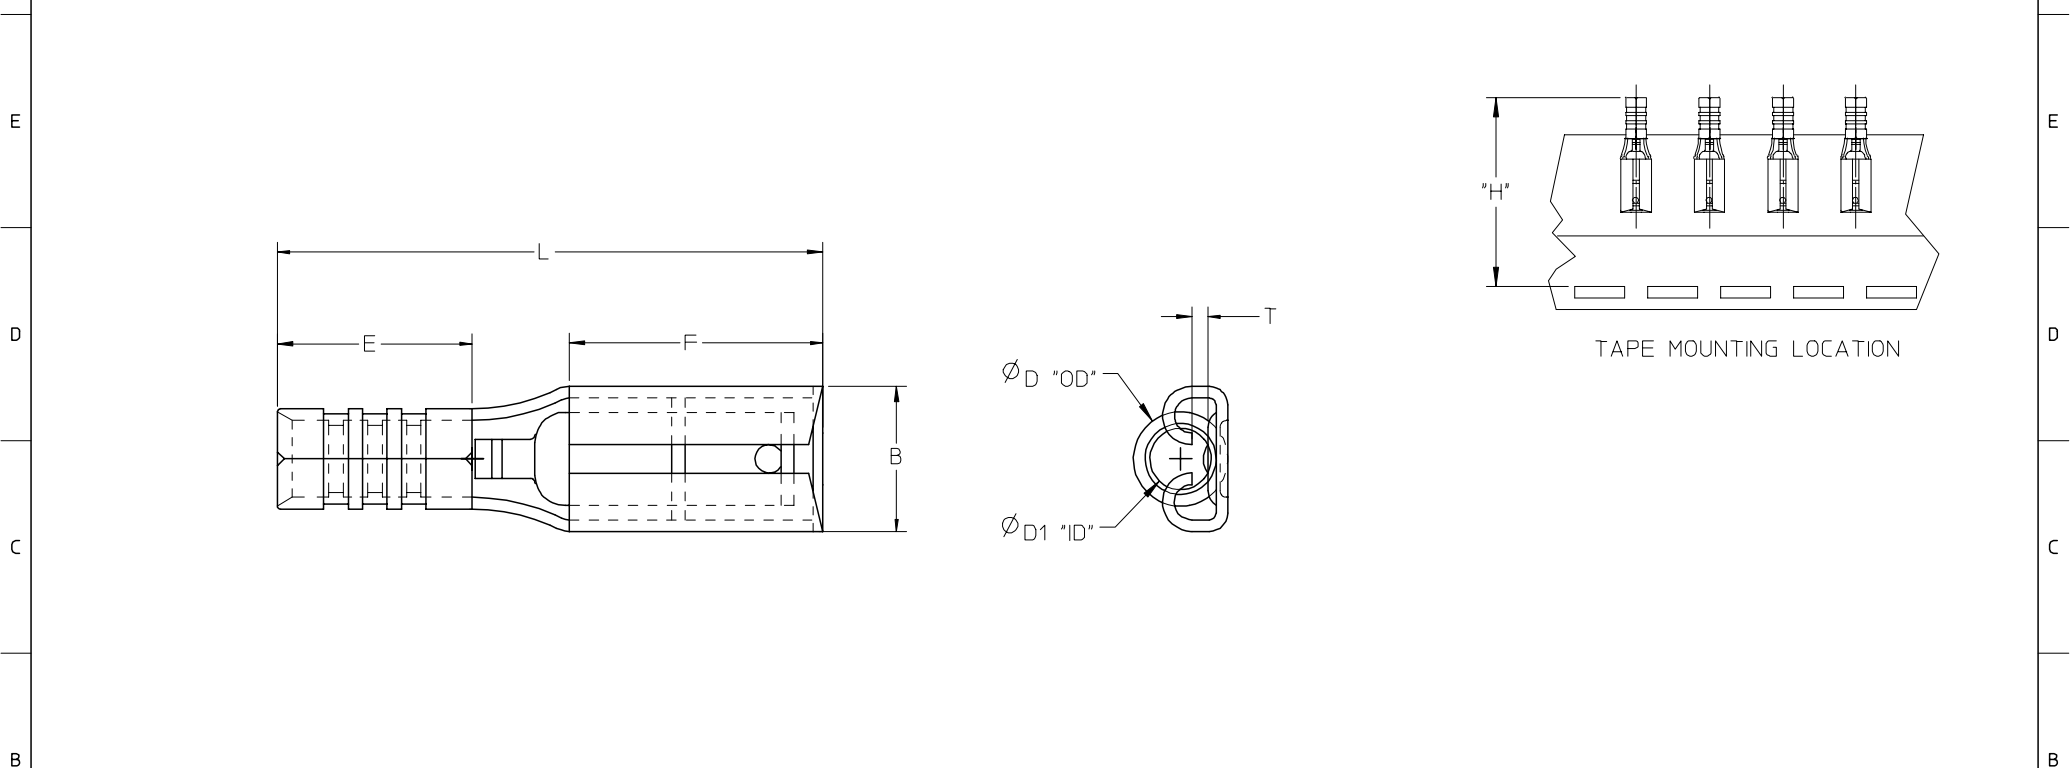

NOTE(S):
1. MATERIAL: STEEL .016/0.40 THICK REF.
2. FINISH: NICKEL PLATED
3. PART IS ROHS COMPLIANT.
4. AMBIENT OPERATING TEMPERATURE UP TO 900 °F (483 °C).

ADDED OPERATING TEMP EC NO: ETC2007-0297 2007/03/13 DRW: NEHLE CHKD: JMACNEIL APPR: JMACNEIL 2007/03/14	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY ASAYDEH	DATE 05/12/02	TITLE KRIMPTITE QUICK DISCONNECT, STEEL, 900 DEG F (483 DEG C)		
			4 PLACES ± ---	± ---	CHECKED BY	DATE			
			3 PLACES ± ---	± ---	R DEROSS	05/12/02	MOLEX INCORPORATED		
			2 PLACES ± ---	± ---	APPROVED BY	DATE			
1 PLACE ± ---	± ---	R DEROSS	05/12/02	DOCUMENT NO. SD-19203-025			SHEET NO. 1 OF 1		
B	REV	ANGULAR ± ---°		MATERIAL NO.		SEE CHART			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			