



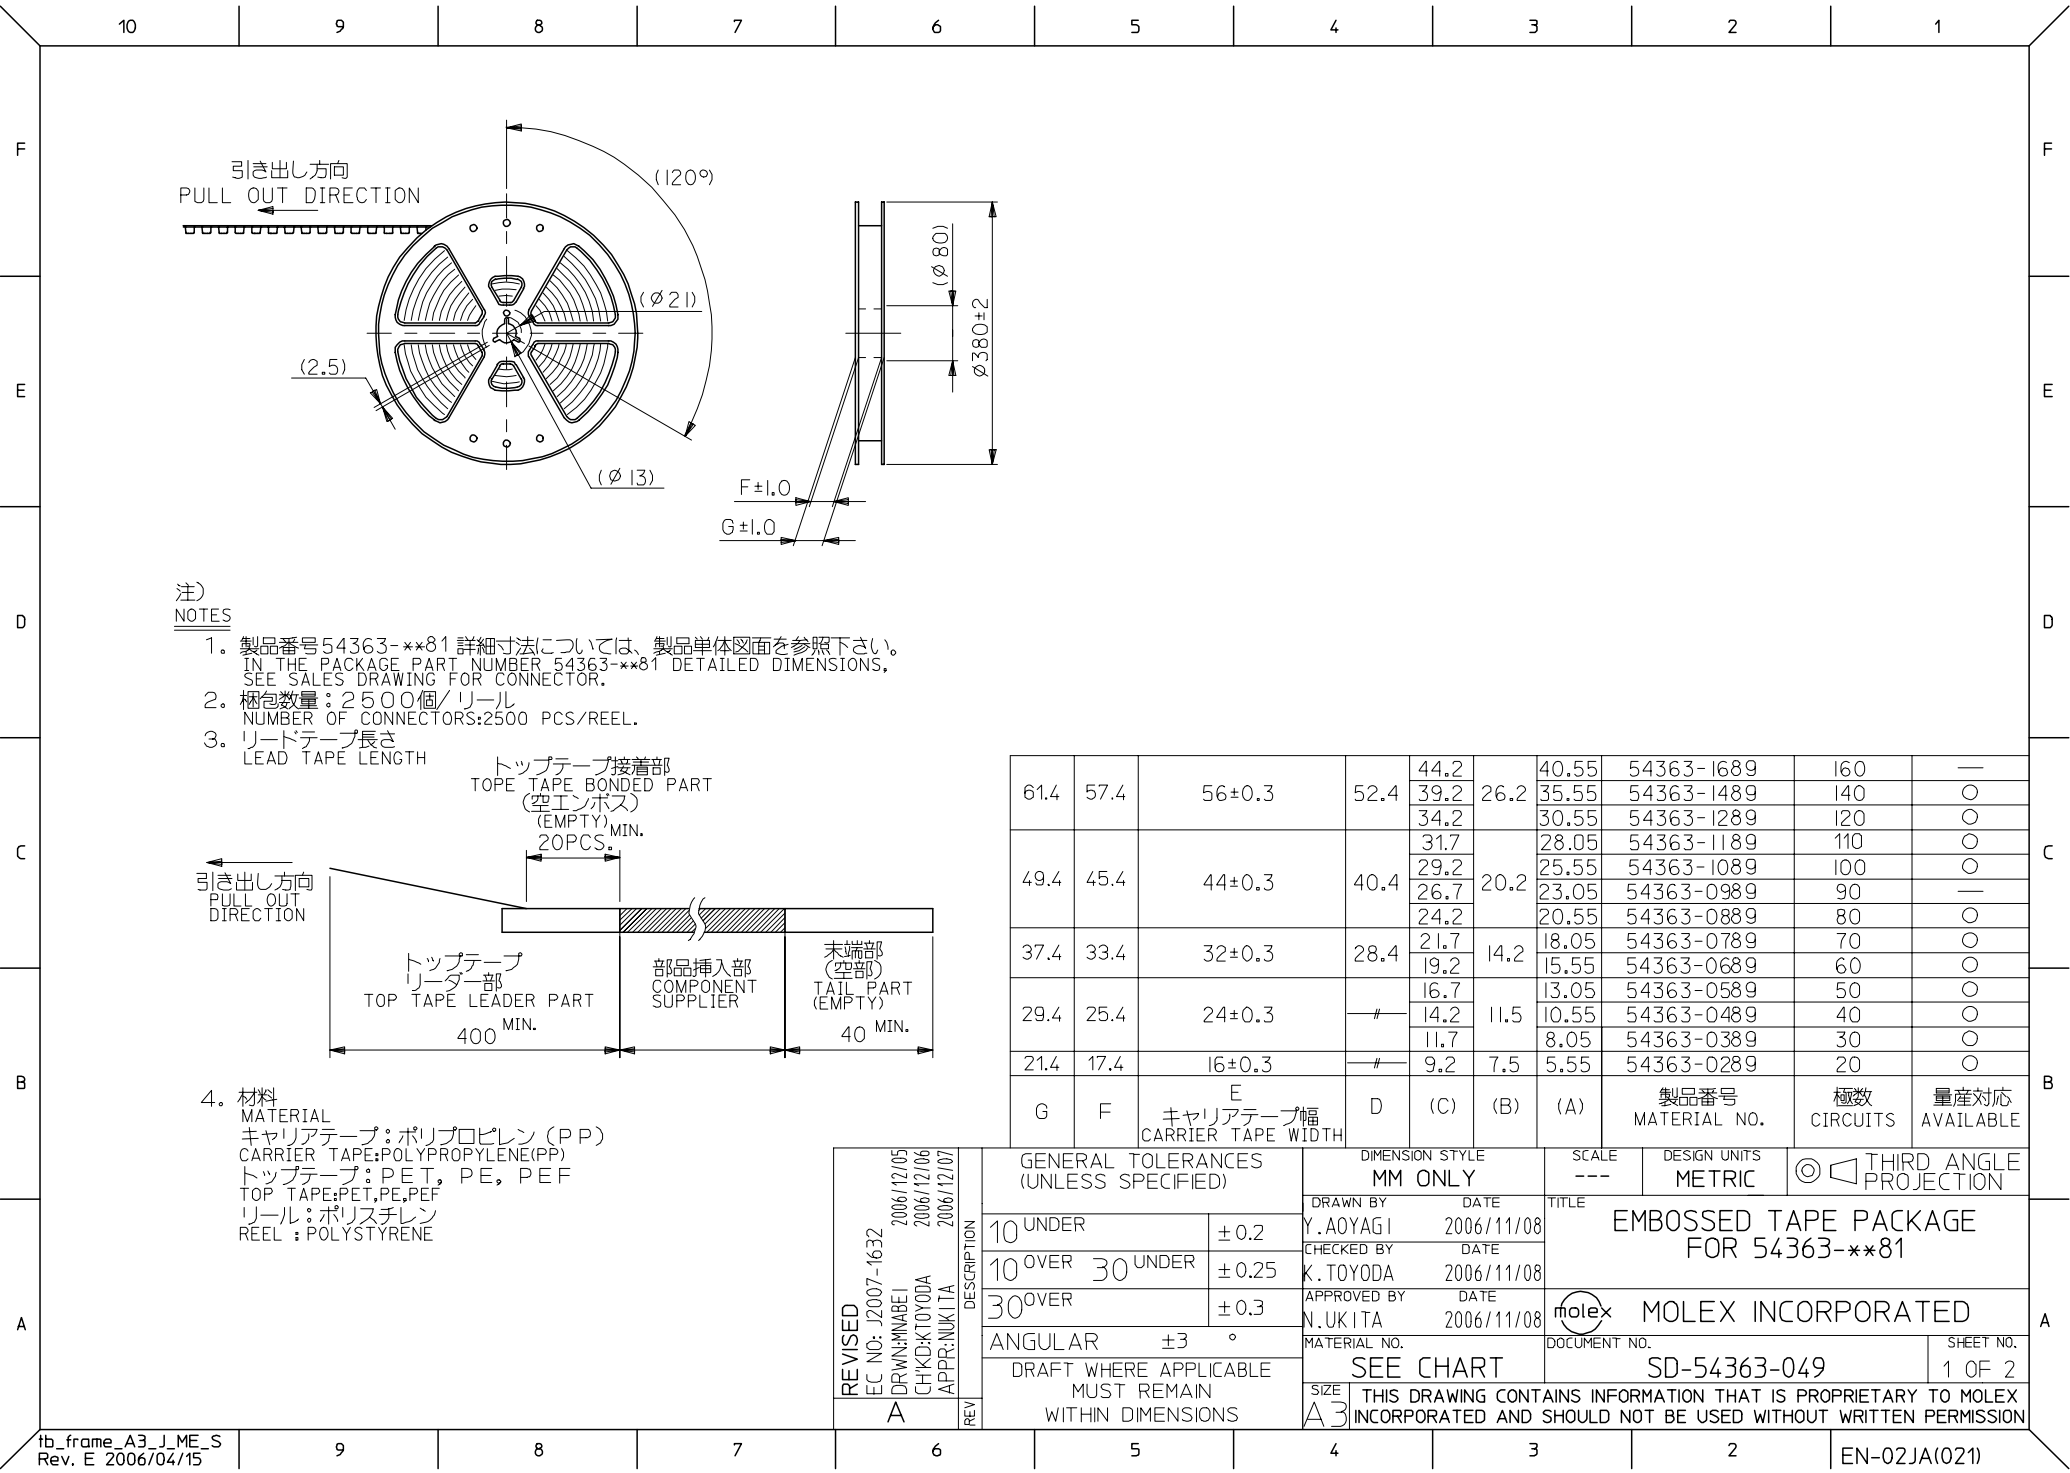

注)
NOTES


- 製品番号54363-**81 詳細寸法については、製品単体図面を参照下さい。
IN THE PACKAGE PART NUMBER 54363-**81 DETAILED DIMENSIONS,
SEE SALES DRAWING FOR CONNECTOR.
- 梱包数量: 2500個/リール
NUMBER OF CONNECTORS: 2500 PCS/REEL.
- リードテープ長さ
LEAD TAPE LENGTH

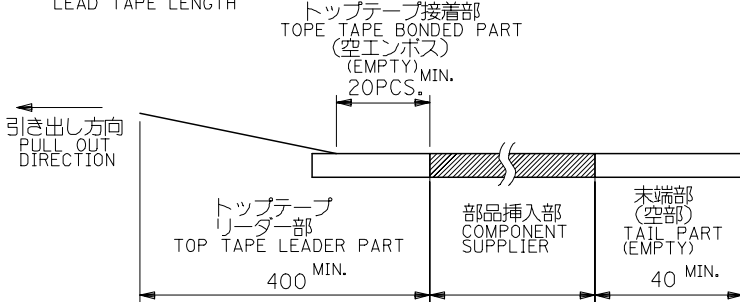



4. 材料
MATERIAL
キャリアテープ: ポリプロピレン (PP)
CARRIER TAPE: POLYPROPYLENE (PP)
トッパテープ: PET, PE, PEF
TOP TAPE: PET, PE, PEF
リール: ポリスチレン
REEL: POLYSTYRENE

61.4	57.4	56±0.3	52.4	44.2	26.2	40.55	54363-1689	160	—
				39.2		35.55	54363-1489	140	○
				34.2		30.55	54363-1289	120	○
49.4	45.4	44±0.3	40.4	31.7	20.2	28.05	54363-1189	110	○
				29.2		25.55	54363-1089	100	○
				26.7		23.05	54363-0989	90	—
				24.2		20.55	54363-0889	80	○
37.4	33.4	32±0.3	28.4	21.7	14.2	18.05	54363-0789	70	○
				19.2		15.55	54363-0689	60	○
29.4	25.4	24±0.3	—	16.7	11.5	13.05	54363-0589	50	○
				14.2		10.55	54363-0489	40	○
				11.7		8.05	54363-0389	30	○
21.4	17.4	16±0.3	—	9.2	7.5	5.55	54363-0289	20	○
G	F	E	D	(C)	(B)	(A)	製品番号 MATERIAL NO.	極数 CIRCUITS	量産対応 AVAILABLE
キャリアテープ幅 CARRIER TAPE WIDTH									

REVISED EC NO: J2007-1632 DRWN: MWABEI CHKD: KTOYODA APPR: NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY Y. AOYAGI	DATE 2006/11/08	TITLE EMBOSSSED TAPE PACKAGE FOR 54363-***81				
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TOYODA	DATE 2006/11/08					
		30 OVER	±0.3	APPROVED BY N. UKITA	DATE 2006/11/08	MOLEX MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-54363-049		1 OF 2		
		A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

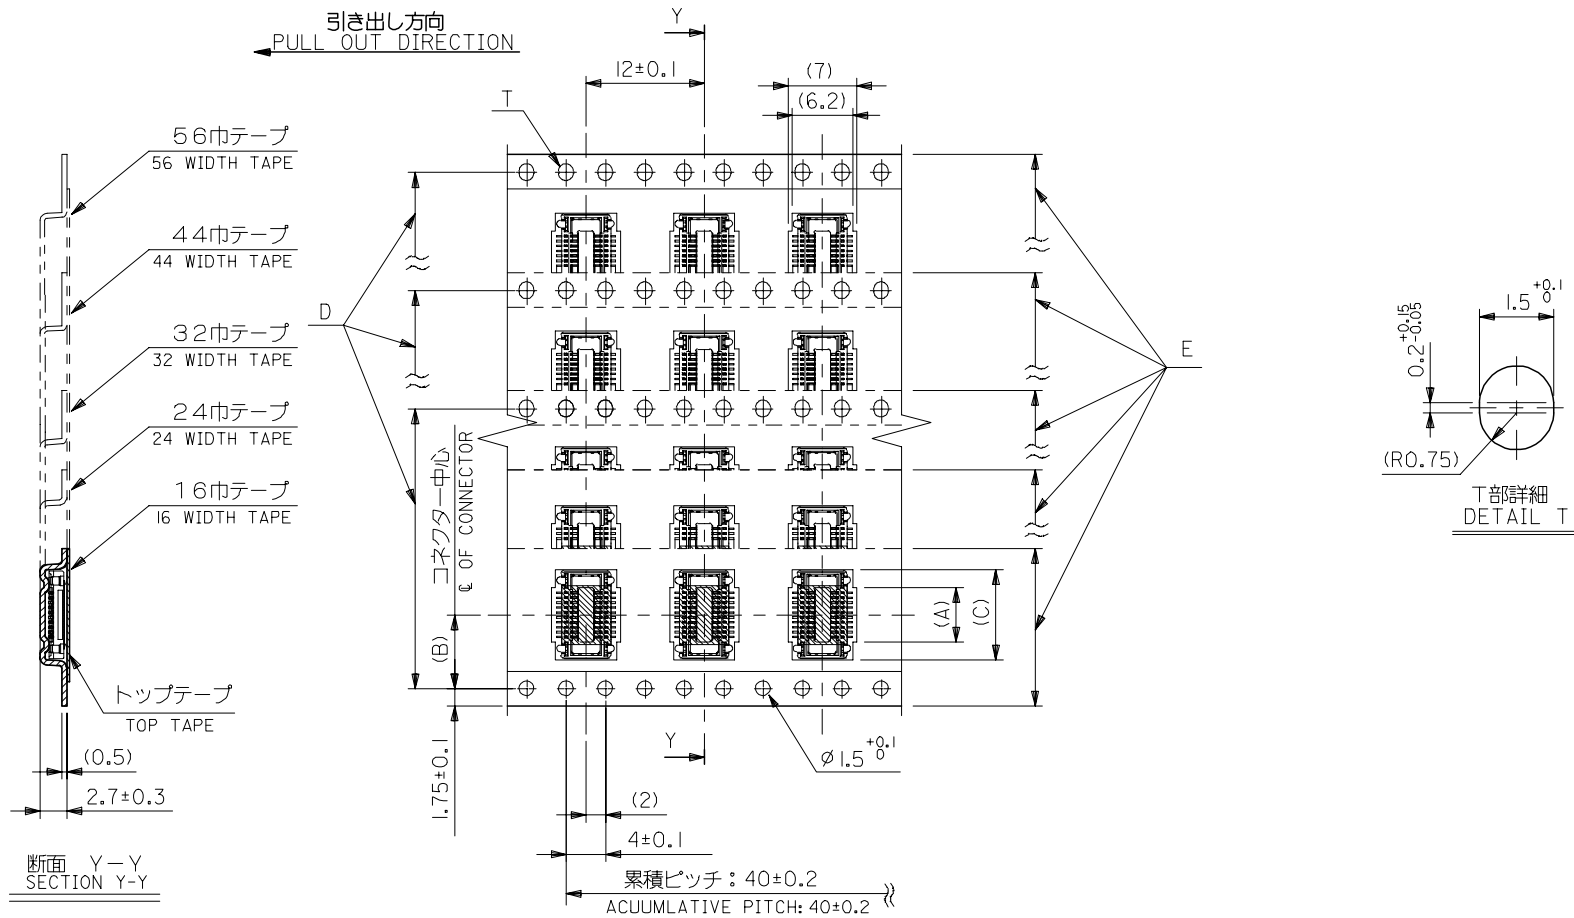


REVISED EC NO: J2007-4632 DRAWN:MABEL CHKD:K TOYODA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY Y.AOYAGI	DATE 2006/11/08	TITLE EMBOSSD TAPE PACKAGE FOR 54363-**81			
		10 OVER 30 UNDER	± 0.25	CHECKED BY K.TOYODA	DATE 2006/11/08				
		30 OVER	± 0.3	APPROVED BY N.UKITA	DATE 2006/11/08	 MOLEX INCORPORATED			
		ANGULAR ±3 °		MATERIAL NO.					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1		SD-54363-049		2 OF 2		
	REV A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

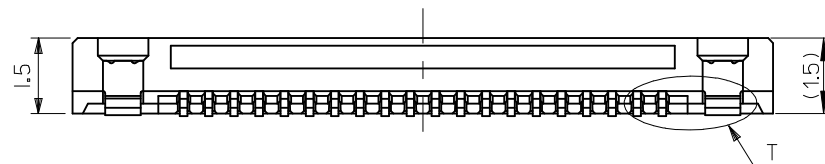


1. 材質
MATERIAL
ハウジング：LCP（液晶ポリマー）、ガラス充填、黒色、UL94V-0
HOUSING:LCP(LIQUID CRYSTAL POLYMER),GLASS FILLED,BLACK,UL94V-0
ターミナル：銅合金（ $t=0.15$ ）
TERMINAL:COPPER ALLOY($t=0.15$)
ネイル：銅合金（ $t=0.2$ ）
NAIL:COPPER ALLOY($t=0.2$)
2. メッキ仕様
PLATING
ターミナル
TERMINAL
接点部：金メッキ 0.25マイクロメートル以上
CONTACT AREA:GOLD 0.25 MICROMETER MINIMUM
半田付け部：金メッキ 0.4マイクロメートル以下
SOLDER TAIL AREA:GOLD 0.4 MICROMETER MAXIMUM
下地メッキ：ニッケルメッキ 1.5マイクロメートル以上
UNDER PLATING:NICKEL 1.5 MICROMETER MINIMUM
ネイル
NAIL
錫メッキ 3.0マイクロメートル以上
TIN 3.0 MICROMETER MINIMUM
下地メッキ：ニッケルメッキ1.0マイクロメートル以上
UNDER PLATING:NICKEL 1.0 MICROMETER MINIMUM
3. テール平坦度は、0.08ミリメートル以下。テールとネイルを併せた
平坦度は、0.1ミリメートル以下。
TAIL COPLANARITY TO BE 0.08 MAXIMUM. TAILS AND NAILS
COPLANARITY TO BE 0.1 MAXIMUM.
4. 嵌合相手：55201-***、55650-***（H=2mm）
MATED CONN.:55201-***,55650-***（H=2mm）
5. 本製品は、54363-***71（エンボス梱包品 54363-***78）のニッケルバリア品である。
THIS PRODUCT IS 'NICKEL BARRIER' OF
54363-***71,(EMBOSSD TAPE PKG 54363-***78).

40.5	41.9	39.5	43.9	54363-1689	54363-1681	160	—
35.5	36.9	34.5	38.9	54363-1489	54363-1481	140	○
30.5	31.9	29.5	33.9	54363-1289	54363-1281	120	○
28	29.4	27	31.4	54363-1189	54363-1181	110	○
25.5	26.9	24.5	28.9	54363-1089	54363-1081	100	○
23	24.4	22	26.4	54363-0989	54363-0981	90	—
20.5	21.9	19.5	23.9	54363-0889	54363-0881	80	○
18	19.4	17	21.4	54363-0789	54363-0781	70	○
15.5	16.9	14.5	18.9	54363-0689	54363-0681	60	○
13	14.4	12	16.4	54363-0589	54363-0581	50	○
10.5	11.9	9.5	13.9	54363-0489	54363-0481	40	○
8	9.4	7	11.4	54363-0389	54363-0381	30	○
5.5	6.9	4.5	8.9	54363-0289	54363-0281	20	○
D	C	B	A	エンボス梱包品 EMBOSSED TAPE PACKAGING	製品番号 MATERIAL NO.	極数 CIRCUITS	量産対応 AVAILABLE


REVISED	EC NO: J2016-0601	DRAWN: FURUKAWA CHKD: TASAKAWA APPR: KIMORI KAWA	2015/12/08 2015/12/08 2015/12/16	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					0.25 UNDER	UNDER	± 0.03	DRAWN BY Y. AOYAGI	DATE 2006/11/08	TITLE 0.5 MM PITCH B/B CONN. WITH FITTING NAIL -LEAD FREE- molex			
					0.25 OVER	0.5 UNDER	± 0.05						
					0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY K. TOYODA	DATE 2006/11/08				
					1.0 OVER	10 UNDER	± 0.2						
					10 OVER	30 UNDER	± 0.25	APPROVED BY N. UKITA	DATE 2006/11/08				
					30 OVER		± 0.3						
					ANGULAR ±3 °			MATERIAL NO.		DOCUMENT NO.			SHEET NO.
								SEE CHART		SD-54363-050			1 OF 2
					REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

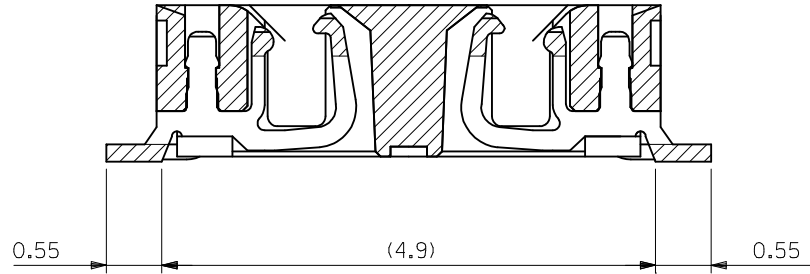

半田付け部詳細図
DETAIL FOR SOLDERING AREA



部品詳細
DETAIL T

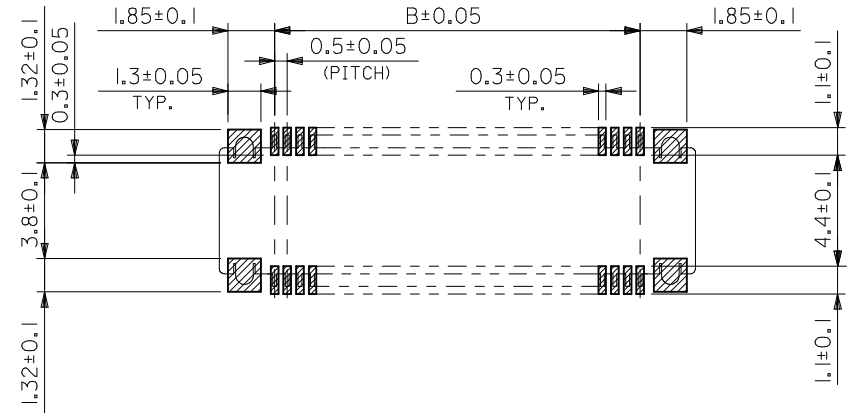

推奨基板寸法
RECOMMENDED PCB PATTERN LAYOUT
(SCALE 5:1)

REVISED	EC NO: J2016-0601	DRWN: FURUKAWA	2015/12/08	CHKD: TASAKAWA	2015/12/16	APPR: KMORIKAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
								0.25	UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 0.5 MM PITCH B/B CONN. WITH FITTING NAIL -LEAD FREE-					
								0.25	OVER	0.5	UNDER	± 0.05	Y.AOYAGI						2006/11/08
								0.5	OVER	1.0	UNDER	± 0.1	CHECKED BY	DATE	DOCUMENT NO. SD-54363-050				
								1.0	OVER	10	UNDER	± 0.2	K.TOYODA	2006/11/08					
								10	OVER	30	UNDER	± 0.25	APPROVED BY	DATE	SHEET NO. 2 OF 2				
								30	OVER		± 0.3	N.UKITA	2006/11/08						
								ANGULAR ±3 °			MATERIAL NO.		SEE SHEET 1						
								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
								REV											