


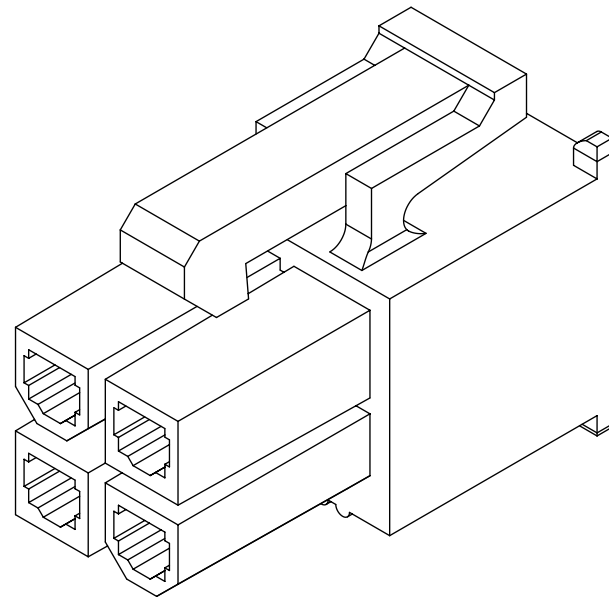

NOTES:

1) MATERIAL:

"BLANK" = NYLON 6/6, UNFILLED UL94V-2, COLOR: NATURAL.

"BL" = NYLON 6/6, UNFILLED UL94V-2, COLOR: BLACK.

"BU" = NYLON 6/6, UNFILLED UL94V-2, COLOR: BLUE.

"RE"= NYLON 6/6, UNFILLED UL94V-2, COLOR: RED.

"YE"= NYLON 6/6, UNFILLED UL94V-2, COLOR: YELLOW

"GRE"= NYLON 6/6, UNFILLED UL94V-2, COLOR: GREEN.

"210" = NYLON 6/6, UNFILLED UL94V-0, COLOR: NATURAL.

"400" = NYLON 6/6, UNFILLED UL94V-0, COLOR: BLACK.

2) FINISH: NOT APPLICABLE

3) PRODUCT SPECIFICATION: PS-5556-001

4) PACKAGING: BULK

5) PART MATES WITH MOLEX PLUG #5559 AND HEADERS #5566, #5569.

6) PART TO BE USED WITH MOLEX FEMALE TERMINAL #5556.

7) PART IS NOT DESIGNED FOR CURRENT SHARING.


8) CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.

9) WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.

10) PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002 WITH THE EXCEPTION OF DISCOLORATION, FLASH AND SINK MEET CLASS "C" REQUIREMENTS.

11 TO BE MEASURED AT SURFACE Z


12 TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY
DEPENDING ON PART NUMBER AND/OR TOOL.

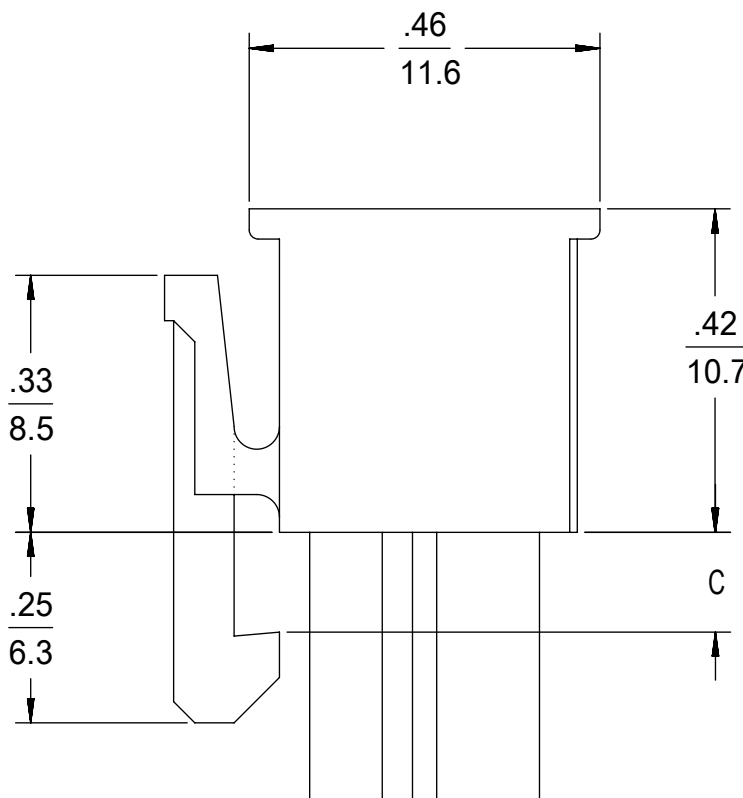

Technical drawing of a mechanical part, likely a bracket or support. The drawing shows a side view with a vertical dimension of 10.6 and a horizontal dimension of .42. The part has a complex profile with a curved section and a vertical slot.

2 CKT ONLY

2.031/(51.60)	1.819/(46.20)	.142/ (3.60)	24
1.866/(47.40)	1.654/(42.00)		22
1.701/(43.20)	1.488/(37.80)		20
1.535/(39.00)	1.323/(33.60)		18
1.370/(34.80)	1.157/(29.40)		16
1.205/(30.60)	0.992/(25.20)	.129/ (3.30)	14
1.039/(26.40)	0.827/(21.00)		12
0.874/(22.20)	0.661/(16.80)		10
0.709/(18.00)	0.496/(12.60)		8
0.543/(13.80)	0.331/(8.40)		6
0.378/(9.60)	0.165/(4.20)		4
0.213/(5.40)	—————		2
A	B	C	NO. OF C&TS

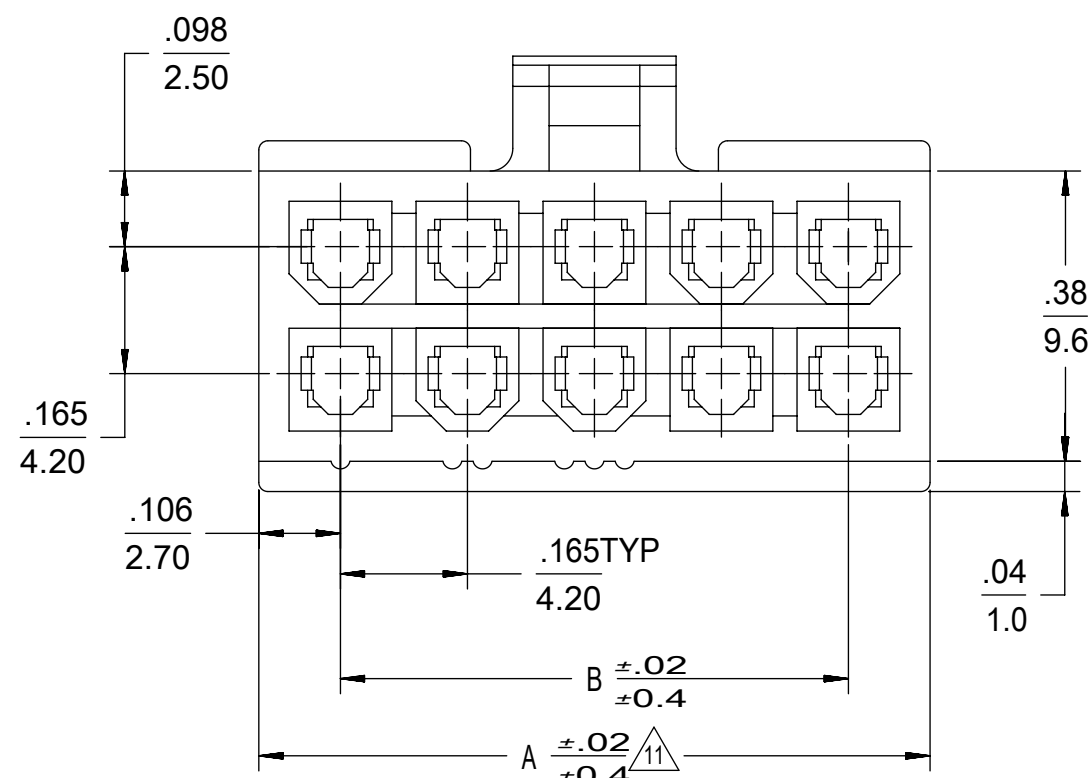

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	= 0	OBS -225 P/N'S EC NO: 105893 DRWN: CSLAFTER CHKD: REV APPR: FSMITH	2016/03/25 2016/07/15	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		 MINIFIT JR RECEPTACLE HOUSING DUAL ROW 2-24 CKT			
	= 0					IN/MM		4:1					
	= 0			MM	INCH	DRWN BY		DATE					
	= 0			4 PLACES ±	±	S.MOCHIZUKI		'90/02/22					
	= 0			3 PLACES ±	± 0.01	CHK'D BY		DATE					
	= 0			2 PLACES ±	± 0.015	M.FUKUSHIMA		'97/01/08					
	= 0			1 PLACES ±	± 0.38 ±	APPR BY		DATE					
	= 0			0 PLACES ±	±	FSMITH		2011/02/21					
	= 0			ANGULAR TOL ± 0.5		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES 5557 MATERIAL NUMBER SEE CHART CUSTOMER GENERAL MARKET			
	= 0			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		C							
J14		REV		DOCUMENT NUMBER SD-5557-003 DOC TYPE PSD DOC PART 000 SHEET NUMBER 1 OF 2									

MINIFIT JR
RECEPTACLE HOUSING DUAL ROW 2-24 CKT

PRODUCT CUSTOMER DRAWING

1	SERIES	MATERIAL NUMBER	CUSTOMER
---	--------	-----------------	----------

5557	SEE CHART	GENERAL MARKET
------	-----------	----------------

0001	SEE CHART	GENERAL INFORMATION	
0001	SEE CHART	0001	0001

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
SD-5557-003	PSD	000	1 OF 2

