
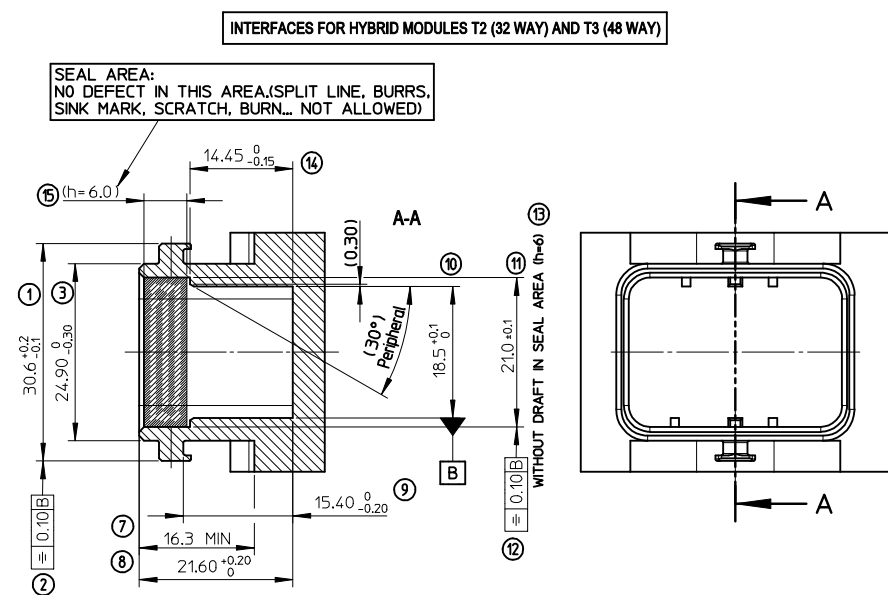
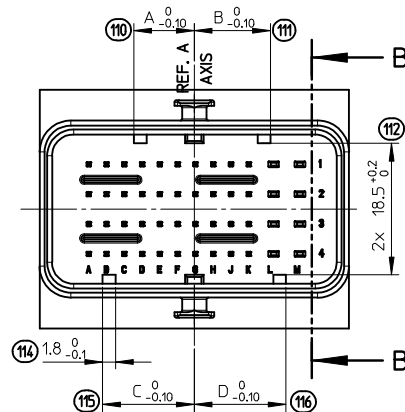





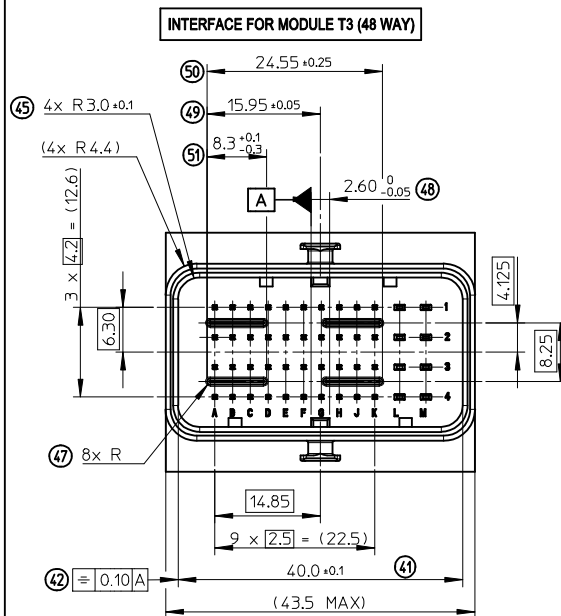


| HEADER'S CODINGS FOR MODULE T2 (32W) |        |        |        |        |        |
|--------------------------------------|--------|--------|--------|--------|--------|
| COLOR                                | CODING | DIM. A | DIM. B | DIM. C | DIM. D |
| BLACK                                | 1      | 9.1    | 4.3    | 5.9    | 4.3    |
| GREY                                 | 2      | 7.5    | 5.9    | 9.1    | 5.9    |
| BROWN                                | 3      | 5.9    | 7.5    | 9.1    | 9.1    |
| GREEN                                | 4      | 7.5    | 9.1    | 4.3    | 4.3    |
| BLUE                                 | 5      | 4.3    | 7.5    | 5.9    | 5.9    |
| YELLOW                               | 6      | 9.1    | 7.5    | 4.3    | 7.5    |


| HEADER'S CODINGS FOR MODULE T3 (48W) |        |        |        |        |        |
|--------------------------------------|--------|--------|--------|--------|--------|
| COLOR                                | CODING | DIM. A | DIM. B | DIM. C | DIM. D |
| BLACK                                | 1      | 12.9   | 6.3    | 8.5    | 6.3    |
| GREY                                 | 2      | 10.7   | 8.5    | 12.9   | 8.5    |
| BROWN                                | 3      | 8.5    | 10.7   | 12.9   | 12.9   |
| GREEN                                | 4      | 10.7   | 12.9   | 6.3    | 6.3    |
| BLUE                                 | 5      | 6.3    | 10.7   | 8.5    | 8.5    |
| YELLOW                               | 6      | 12.9   | 10.7   | 6.3    | 10.7   |

1- INTERFACE DEFINITION BASED ON NFR13-462 STANDARD.  
2- HEADER: ELASTICITY MODULUS: 8000Mpa min.  
(INITIAL CONDITION BEFORE AGEING)

ib\_frame\_A2\_P\_AM\_F  
Rev. F 2009/06/18



MANDATORY OVERTHICKNESS:



ADMISSIBLE SHAPES WITH OVERTHICKNESS 0.2 MIN (✱)

