
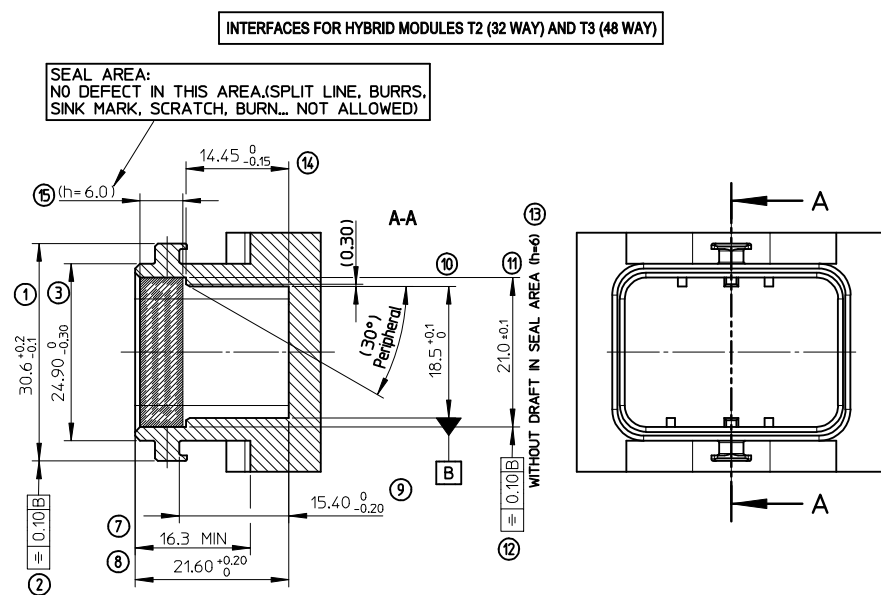
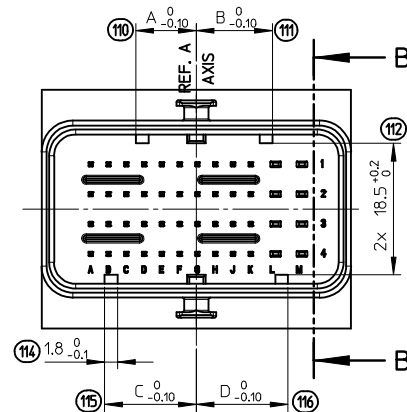


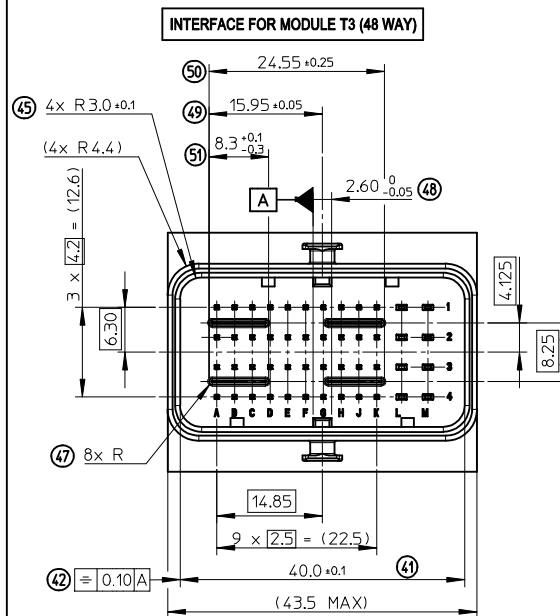

HEADER'S CODINGS FOR MODULE T2 (32W)					
COLOR	CODING	DIM. A	DIM. B	DIM. C	DIM. D
BLACK	1	9,1	4,3	5,9	4,3
GREY	2	7,5	5,9	9,1	5,9
BROWN	3	5,9	7,5	9,1	9,1
GREEN	4	7,5	9,1	4,3	4,3
BLUE	5	4,3	7,5	5,9	5,9
YELLOW	6	9,1	7,5	4,3	7,5


HEADER'S CODINGS FOR MODULE T3 (48W)					
COLOR	CODING	DIM. A	DIM. B	DIM. C	DIM. D
BLACK	1	12.9	6.3	8.5	6.3
GREY	2	10.7	8.5	12.9	8.5
BROWN	3	8.5	10.7	12.9	12.9
GREEN	4	10.7	12.9	6.3	6.3
BLUE	5	6.3	10.7	8.5	8.5
YELLOW	6	12.9	10.7	6.3	10.7

- 1- INTERFACE DEFINITION BASED ON NFR13-462 STANDARD.
- 2- HEADER: ELASTICITY MODULUS: 8000Mpa min.
(INITIAL CONDITION BEFORE AGEING)

tb_frame_A2_P_AM_F
Rev. F 2009/06/18


PINS 0.635 DEFINITION

5:1

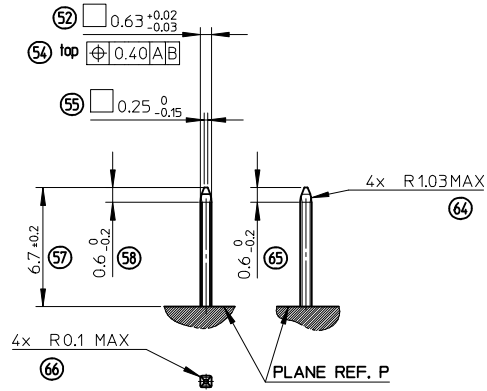


TABS 1.5 DEFINITION

5:1

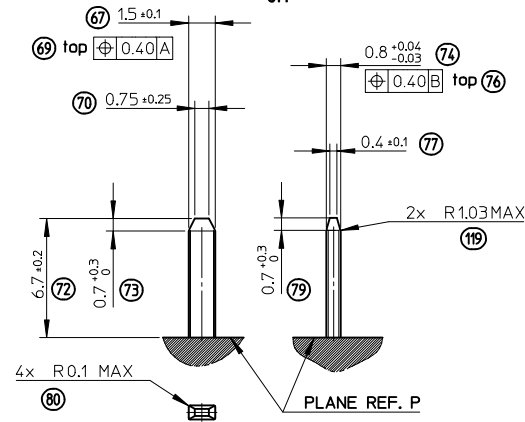

GROUND TABS 1.5 DEFINITION


5:1

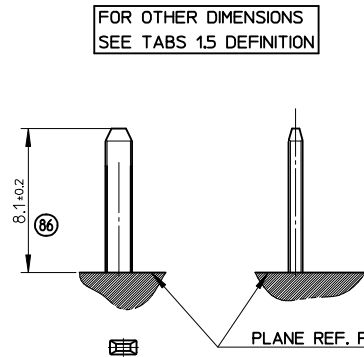

PROTECTION WALL DEFINITION

5:1


1: SHAPES ALLOWED

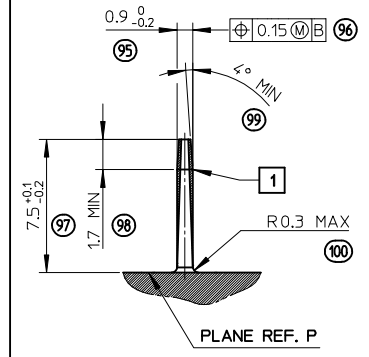


LOCKING AXIS PROTECTION

2:1

MANDATORY OVERTHICKNESS: dimension noted (*)
IF THE LOCKING AXIS ARE OUT OF
EQUIPMENT OVERALL DIMENSIONS.

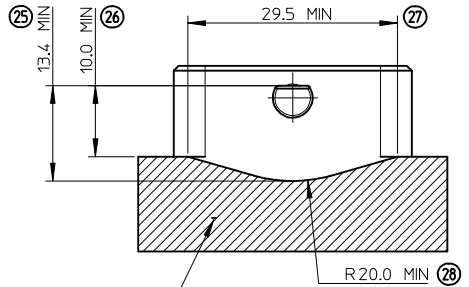


ADMISSIBLE SHAPES WITH OVERTHICKNESS 0.2 MIN (*)

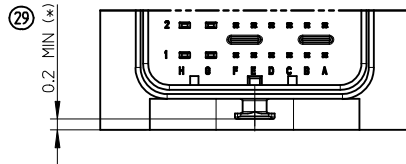

LOCKING AXIS DEFINITION


5:1

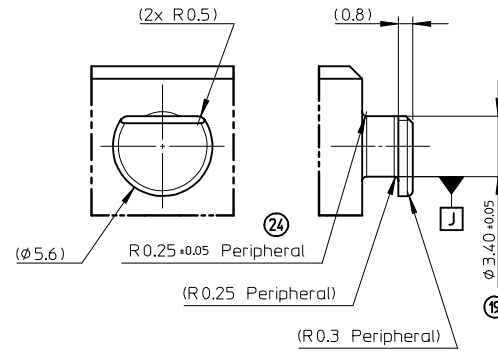


ENTER DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	FIRST ANGLE PROJECTION	TITLE	DOCUMENT NO.	SHEET NO.
EC NO: G2010-0220	mm	MM ONLY	1:1	METRIC		INTERFACES FOR CONNECTOR	SD-98644-006	2 OF 3
DRWN: POCHELE 2010/05/20	INCH					32 & 48 CKT CMC		
CHKD: J. GIURIATO 2008/10/03	4 PLACES ± --- ± ---	DRAWN BY DATE				GENERIC SALES DRAWING		
APPR: CBOUCHAN 2010/06/29	3 PLACES ± --- ± ---	CHECKED BY DATE				MOLEX INCORPORATED		
	2 PLACES ± 0.10 ± ---	J. GIURIATO 2008/10/03						
	1 PLACE ± 0.10 ± ---	APPROVED BY DATE						
	ANGULAR ± 2 °	O. PLESSIS 2008/10/06						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.						
		N/A						
		SIZE A2						
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

CONNECTOR ON HEADER - OVERALL DIMENSIONS


UNLOCKED CONNECTOR - OVERALL DIMENSIONS

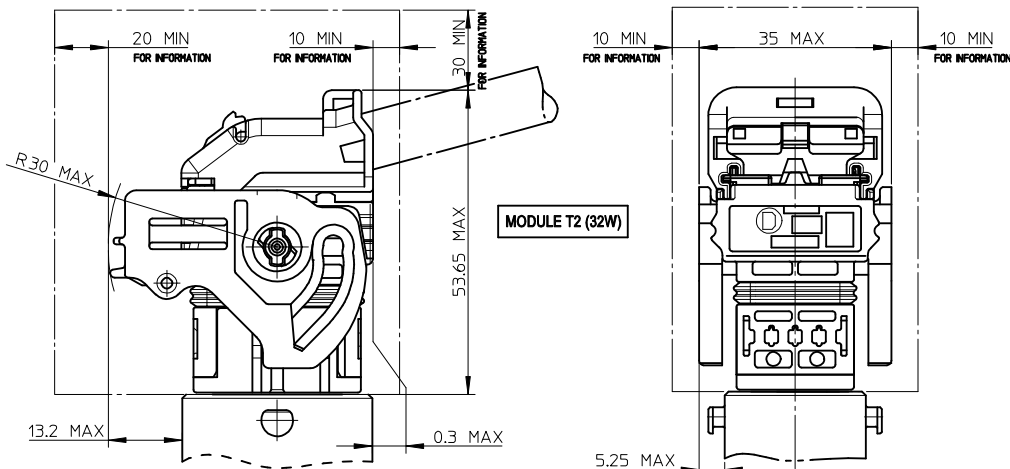


LOCKED CONNECTOR - OVERALL DIMENSIONS

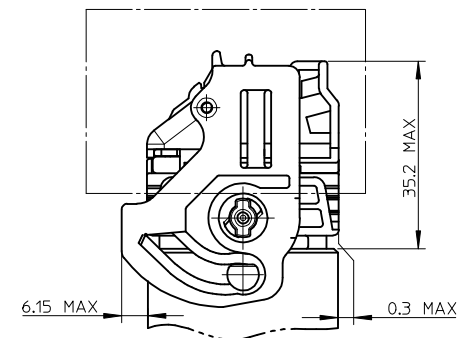

UNLOCKED CONNECTOR - OVERALL DIMENSIONS

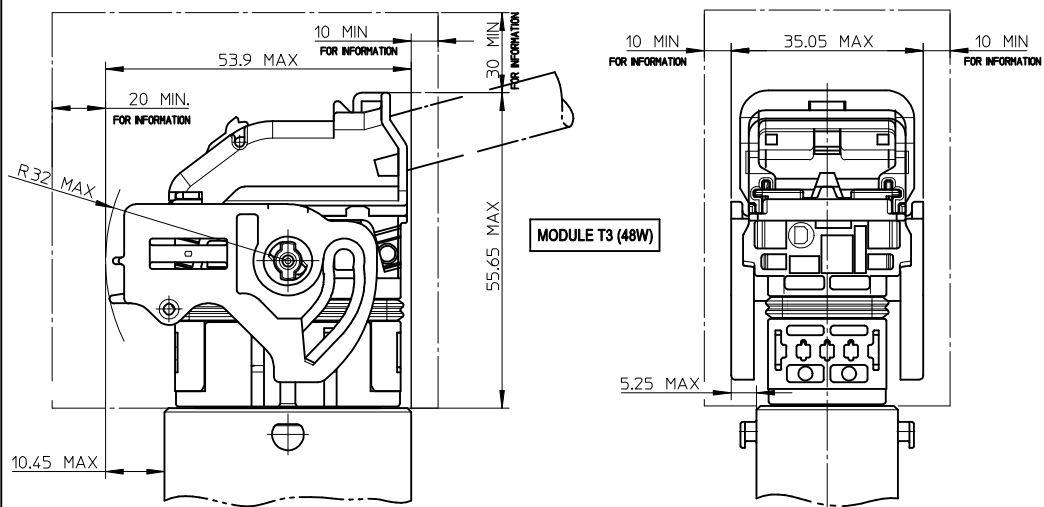

LOCKED CONNECTOR - OVERALL DIMENSIONS

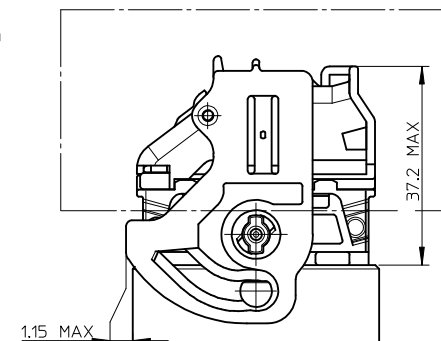


NOTE:
1- T2 = 32 WAY / T3 = 48 WAY

MULTI-HEADERS LAYOUT

LAYOUT FOR TWO INTERFACES T2 (32W)

FOR SAME HARNESS EXIT CONFIGURATION




FOR OPPOSITE HARNESS EXIT CONFIGURATION



LAYOUT FOR TWO INTERFACES T2 (32W) AND T3 (48W)

FOR SAME HARNESS EXIT CONFIGURATION




FOR OPPOSITE HARNESS EXIT CONFIGURATION



LAYOUT FOR TWO INTERFACES T3 (48W)


FOR SAME HARNESS EXIT CONFIGURATION



FOR OPPOSITE HARNESS EXIT CONFIGURATION



LEGEND:



FREE VOLUME FOR MANUAL LOCKING AND UNLOCKING
DIMENSIONS GIVEN FOR INFORMATION ONLY TO BE
CONFIRMED BASED UPON VEHICLE CONFIGURATION.

ENTER DESCRIPTION

EC NO: G2010-0220
DRAWN: P. DECELE 2010/05/20
CHKD: J. GIURIATO 2008/10/03
APPR: C. BOUCHAN 2010/06/29

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± 0.10	± 0.004
3 PLACES	± 0.15	± 0.006
2 PLACES	± 0.20	± 0.008
1 PLACE	± 0.30	± 0.012
ANGULAR	± 2 °	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY

DRAWN BY	DATE
G. DESBRUERES	2008/10/02
CHECKED BY	DATE
J. GIURIATO	2008/10/03
APPROVED BY	DATE
O. PLESSIS	2008/10/06
MATERIAL NO.	
N/A	

SCALE 1:1 DESIGN UNITS METRIC FIRST ANGLE PROJECTION

TITLE
INTERFACES FOR CONNECTOR
32 & 48 CKT CMC
GENERIC SALES DRAWING

MOLEX INCORPORATED

DOCUMENT NO. SD-98644-006 SHEET NO. 3 OF 3