

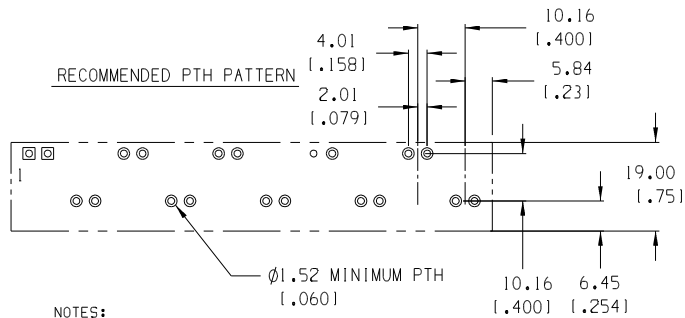
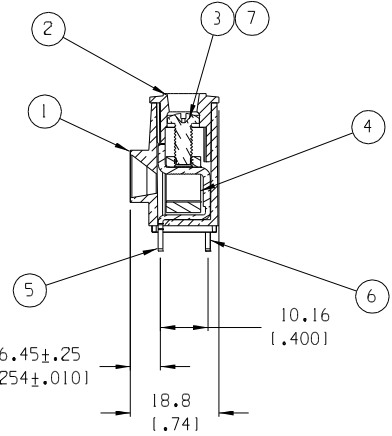


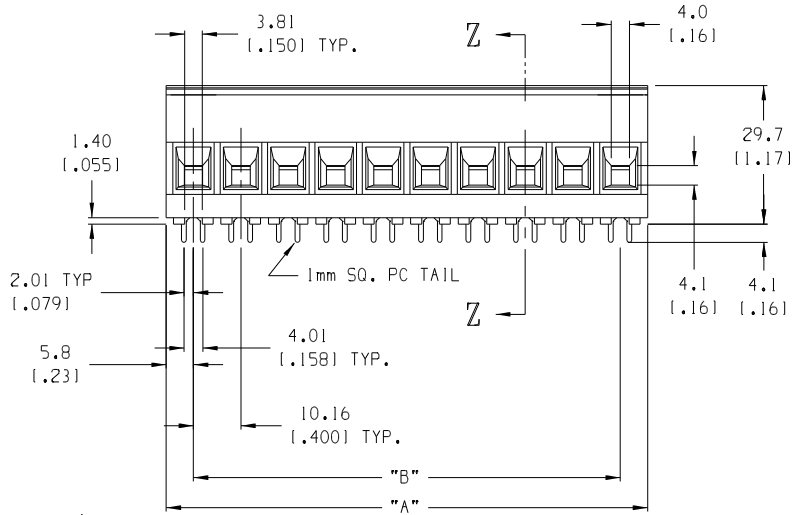

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATION: NOT REQUIRED
 4. PACKAGING: NOT REQUIRED
 5. MATES WITH: NONE
 6. PART IS DESIGNED TO MEET UL 1059 CLASS C 600V, 40A
 7. STAGGERED PC TAIL POSITION ON ALTERNATE CIRCUITS
 8. "XX" REFERS TO NUMBER OF CIRCUITS
 9. FOR OPTIONAL IMPRINTING, REFER TO SD-38120-005

7	XX	SCREW, M4, #2 POZI-SLOT, ST. STEEL	ST. STEEL	TIN
6	A/R	REAR TERMINAL	COPPER	TIN
5	A/R	FRONT TERMINAL	COPPER	TIN
4	XX	CAGE	BRASS	NICKEL
3	XX	SCREW, M4, #2 POZI-SLOT, BRONZE	BRONZE	TIN
2	I	COVER	THERMOPLASTIC	BLACK
1	I	BODY	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

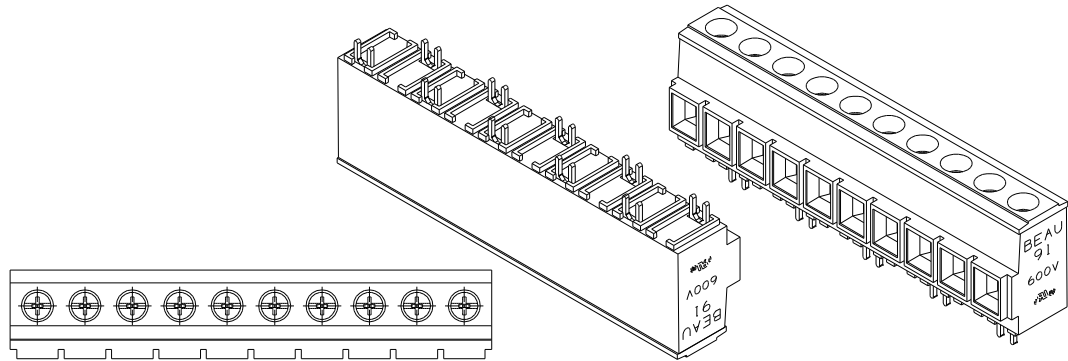

SECTION Z-Z

EC NO. 4261 DRN: RK 10-7-05 CHK: APPR: REV	DESCRIPTION	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 1:1	DESIGN UNITS ☐ mm ☒ INCH	THIRD ANGLE PROJECTION	PROJECT NO. -		-	-
					DRAWN BY & DATE R.STONE 9-13-00	DIMENSIONS: ☒ mm ☐ INCH ☐ mm ONLY		SHT	REV		
					CHECKED BY & DATE R.KEMP 9-13-02	REVISE ON CAD ONLY					
					APPROVED BY & DATE L. ROTHBAUS 9-27-02						
			ANGULAR: ±2°		CAD FILENAME 9135XX	MATERIAL NO. SEE CHART	DRAWING NO. SD-39910-002	SHEET NO. 1 OF 2		SIZE B	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						

MOLEX INCORPORATED

SR BTS 8 AWG ASSY, 600V 40 A

