
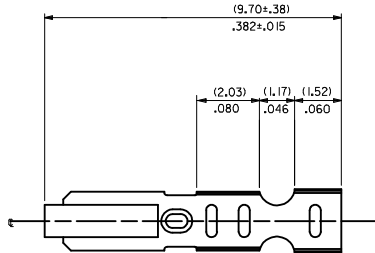





20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

CARRIER VIEW




- NOTES:
1. MATERIAL:
(0.20)/.008 THICK BRASS
 2. FINISH:
122 - OVERALL TIN: (0.00381)/.000150 MIN. TIN OVER
(0.00076)/.000030 MIN NICKEL
154 - OVERALL TIN: (0.00254)/.000100 MIN. TIN OVER
(0.00127)/.000050 MIN NICKEL
P909 - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
550 - SELECT GOLD: (0.000381)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
555- SELECT GOLD (0.000381)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030
558 - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
 3. PRODUCT SPEC: PS-10-07
 4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: PER PK-2759-002
 5. CRIMP IS FOR 22-30 GA WIRE WITH (1.57)/.062 DIA INSULATION MAX.
 6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
 7. TERMINAL RETENTION IN HOUSING IS 26.7N / 6LBS MIN. WHEN PULLED AT THE RATE OF (25.4MM) / 1 INCH PER MINUTE.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.



SELECT GOLD LOCATION

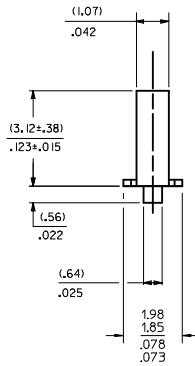

CRIMP DETAIL



CRIMPED TERMINAL 2759-(P909)C IS USED WITHOUT WIRE AND IS INSERTED INTO HOUSING TO PROVIDE TENSION WHEN ASSEMBLED TO HEADERS DURING SHIPMENT.

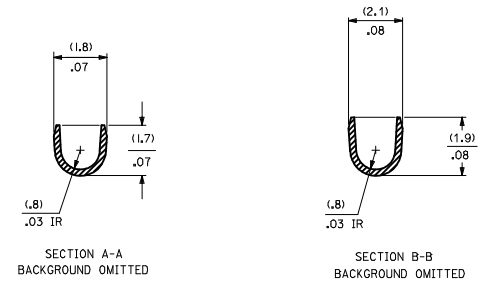

2759-(***)*
FORM
L=LOOSE
C=LOOSE CRIMPED
A=CHAIN, PER WINDING DETAIL "A"
B=CHAIN, PER WINDING DETAIL "B"
PLATING
SEE NOTE 2


ADD WINDING DETAIL EC NO: UCP2014-4131 DRAWN BY: CHYONGKUN CHECKED BY: CHYONGKUN APPROVED BY: CHYONGKUN REV: AW2	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
					DRAWN BY	DATE	TITLE		
			4 PLACES ± ---		SAMIEC	07/28/87	CRIMP TERMINAL 22-30 GA WIRE		
			3 PLACES ± ---		CHECKED BY	DATE			
			2 PLACES ± 0.25		PA TEL	07/28/87			
AW2	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	1 PLACE ± 0.36		APPROVED BY		DATE		
			0 PLACE ± ---		FSM1 TH		2012/03/20		
			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		
			DRAFT WHERE APPLICABLE		SEE CHART		SD-2759		SHEET NO.
			MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 2

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

2759-(***)*		
	PART NO.	ENG. NO.
	08-55-0101	2759-(555)B
	08-55-0102	2759-(555)L
	08-55-0126	2759-(555)A
	08-56-0109	2759-(550)B
	08-56-0110	2759-(550)L
	08-50-0113	2759-(P909)B
	08-50-0114	2759-(P909)L
	08-50-0124	2759-(P909)C
	08-51-0108	2759-(122)B
		2759-(122)L
	08-50-0274	2759-(P909)B
	08-50-0273	2759-(P909)A
	08-55-0130	2759-(558)B
	08-55-0131	2759-(558)L
	08-50-0160	2759-(154)L
	08-50-0159	2759-(154)B

WINDING DETAIL "A"

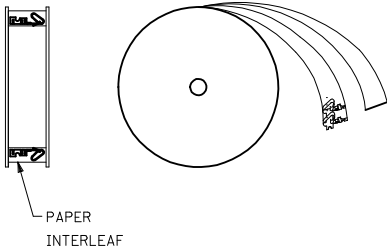

WINDING DETAIL "B"

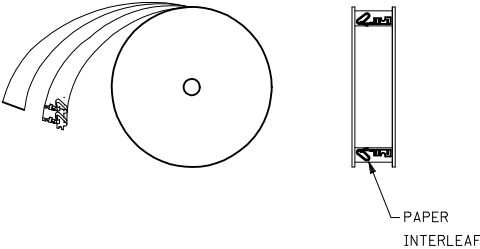

SEE SHEET 1 EC NO. UCP2014-431 DRAWN BY: IPFER 2014/04/07 CHKD BY: NGUYEN 2014/04/08 APPR: FSMITH 2014/04/21	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY	DATE	TITLE		CRIMP TERMINAL 22-30 GA WIRE				
			4 PLACES ±.--- ±.---	3 PLACES ±.--- ±.010	SAMIEC	07/28/87	CHECKED BY						
			2 PLACES ±0.25 ±.014	1 PLACE ±0.36 ±.---	PATEL	07/28/87	APPROVED BY						
			0 PLACE ±.--- ±.---		FSMITH		2012/03/20		DOCUMENT NO.		SD-2759		SHEET NO. 2 OF 2
			ANGULAR ±1/2°		MATERIAL NO.		SEE CHART		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1