
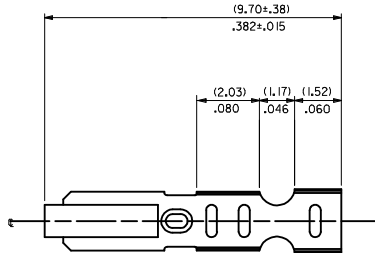





20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

CARRIER VIEW




- NOTES:
1. MATERIAL:
(0.20)/.008 THICK BRASS
 2. FINISH:
122 - OVERALL TIN: (0.00381)/.000150 MIN. TIN OVER
(0.00076)/.000030 MIN NICKEL
154 - OVERALL TIN: (0.00254)/.000100 MIN. TIN OVER
(0.00127)/.000050 MIN NICKEL
P909 - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
550 - SELECT GOLD: (0.000381)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
555- SELECT GOLD (0.000381)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030
558 - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
 3. PRODUCT SPEC: PS-10-07
 4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: PER PK-2759-002
 5. CRIMP IS FOR 22-30 GA WIRE WITH (1.57)/.062 DIA INSULATION MAX.
 6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
 7. TERMINAL RETENTION IN HOUSING IS 26.7N / 6LBS MIN. WHEN PULLED AT THE RATE OF (25.4MM) / 1 INCH PER MINUTE.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.


SELECT GOLD LOCATION

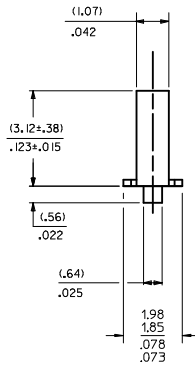

CRIMP DETAIL



CRIMPED TERMINAL 2759-IP909IC IS USED WITHOUT WIRE AND IS INSERTED INTO HOUSING TO PROVIDE TENSION WHEN ASSEMBLED TO HEADERS DURING SHIPMENT.

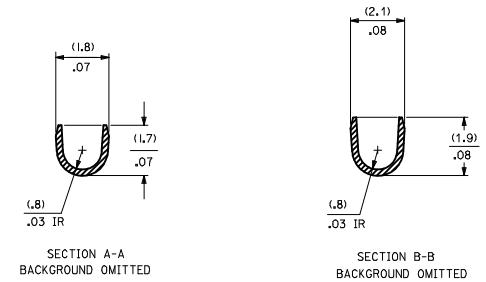

SECTION A-A
BACKGROUND OMITTED

SECTION B-B
BACKGROUND OMITTED


2759-*****)
FORM
L=LOOSE
C=LOOSE CRIMPED
A=CHAIN, PER WINDING DETAIL "A"
B=CHAIN, PER WINDING DETAIL "B"
PLATING
SEE NOTE 2

ADD WINDING DETAIL EC NO: UCP2014-4131 DRAWN BY: CHYONGKUN 2014/04/07 2014/04/08 APPROVED BY: FSM TH 2014/04/21	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
					DRAWN BY	DATE	TITLE		
			4 PLACES ± ---		SAMIEC	07/28/87	CRIMP TERMINAL 22-30 GA WIRE		
			3 PLACES ± ---		CHECKED BY	DATE			
			2 PLACES ± 0.25		PAIEL	07/28/87			
AW2	REV	DESCRIPTION	1 PLACE ± 0.36		APPROVED BY		DATE		
			0 PLACE ± ---		FSM TH		2012/03/20		
			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		
			DRAFT WHERE APPLICABLE		SEE CHART		SD-2759		SHEET NO.
			MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

2759-(***)*		
	PART NO.	ENG. NO.
	08-55-0101	2759-(555)B
	08-55-0102	2759-(555)L
	08-55-0126	2759-(555)A
	08-56-0109	2759-(550)B
	08-56-0110	2759-(550)L
	08-50-0113	2759-(P909)B
	08-50-0114	2759-(P909)L
	08-50-0124	2759-(P909)C
	08-51-0108	2759-(122)B
		2759-(122)L
	08-50-0274	2759-(P909)B
	08-50-0273	2759-(P909)A
	08-55-0130	2759-(558)B
	08-55-0131	2759-(558)L
	08-50-0160	2759-(154)L
	08-50-0159	2759-(154)B

WINDING DETAIL "A"

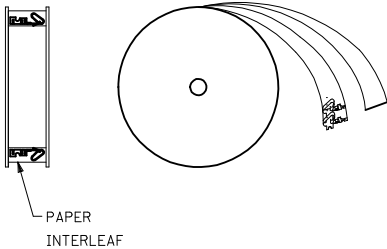

WINDING DETAIL "B"

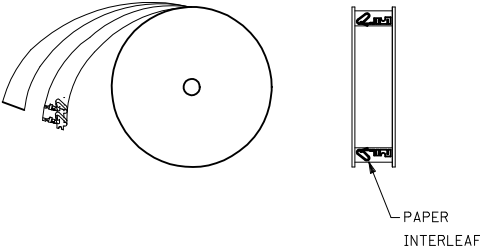

SEE SHEET 1 EC NO. UCP2014-431 DRAWN BY: IPER 2014/04/07 CHKD BY: NGUYEN 2014/04/08 APPR: FSMITH 2014/04/21	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY SAMIEC	DATE 07/28/87	TITLE CRIMP TERMINAL 22-30 GA WIRE		
			4 PLACES ±.--- ±.---	3 PLACES ±.--- ±.010	CHECKED BY PATEL	DATE 07/28/87	APPROVED BY FSMITH		
			2 PLACES ±0.25 ±.014	1 PLACE ±0.36 ±.---	DATE 2012/03/20	MATERIAL NO. SD-2759			
			ANGULAR ±1/2°		DOCUMENT NO.		SHEET NO. 2 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

10 9 8 7 6 5 4 3 2 1

10 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1