
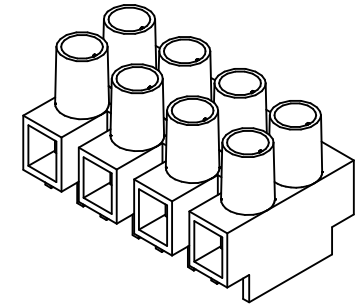

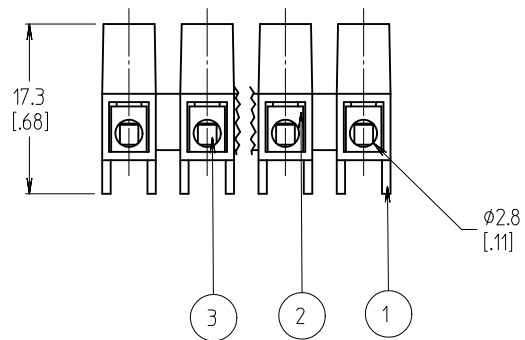


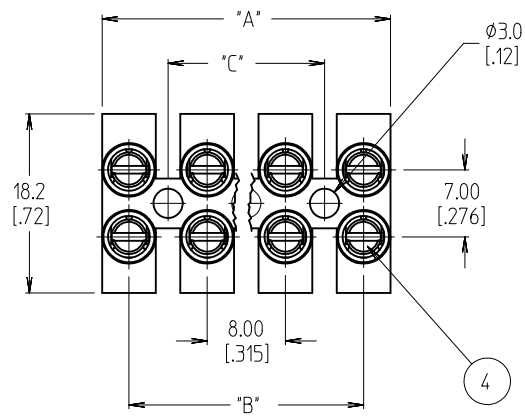

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3.*XX* REFERS TO THE NUMBER OF CIRCUITS
4. ASSEMBLY IS ROHS COMPLIANT BY EXEMPTION.
COMPONENTS MARKED WITH AN ASTERISK (*) ARE ROHS
COMPLIANT BY EXEMPTION, ALL OTHERS ARE ROHS COMPLIANT.

4	XX*2	CLAMPING SCREWS, M2.6 (B)	STEEL	ZINC
3	XX	WIRE PROTECTOR	BRASS	NICKEL
2	XX	TERMINAL (*)	BRASS	NICKEL
1	1	INSULATOR	NYLON 6	CLEAR
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

REVISED & REDRAWN EC NO: WNA2010-0649 DRAWN: CLYORK 2010/04/26 CHKD: DTITUS 2010/04/26 APPR: DTITUS 2010/04/26 B	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 				
				mm	INCH	DRAWN BY CLYORK	DATE 2010/04/26	TITLE 8MM PITCH HIGH PROFILE WITH WIRE PROTECTORS					
			4 PLACES	± ---	± ---	CHECKED BY DTITUS	DATE 2010/04/26						
			3 PLACES	± ---	± .005	APPROVED BY DTITUS			DATE 2010/04/27			MOLEX MOLEX INCORPORATED	
			2 PLACES	± 0.13	± .010								
			1 PLACE	± 0.3	± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			ANGULAR ± 2 °										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-39100-002							
REV			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								