

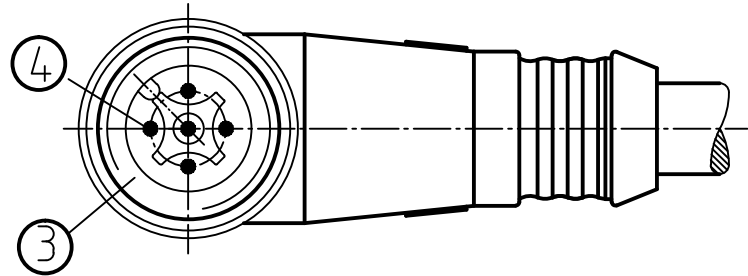


FINISHED LENGTH (SEE TABLE)

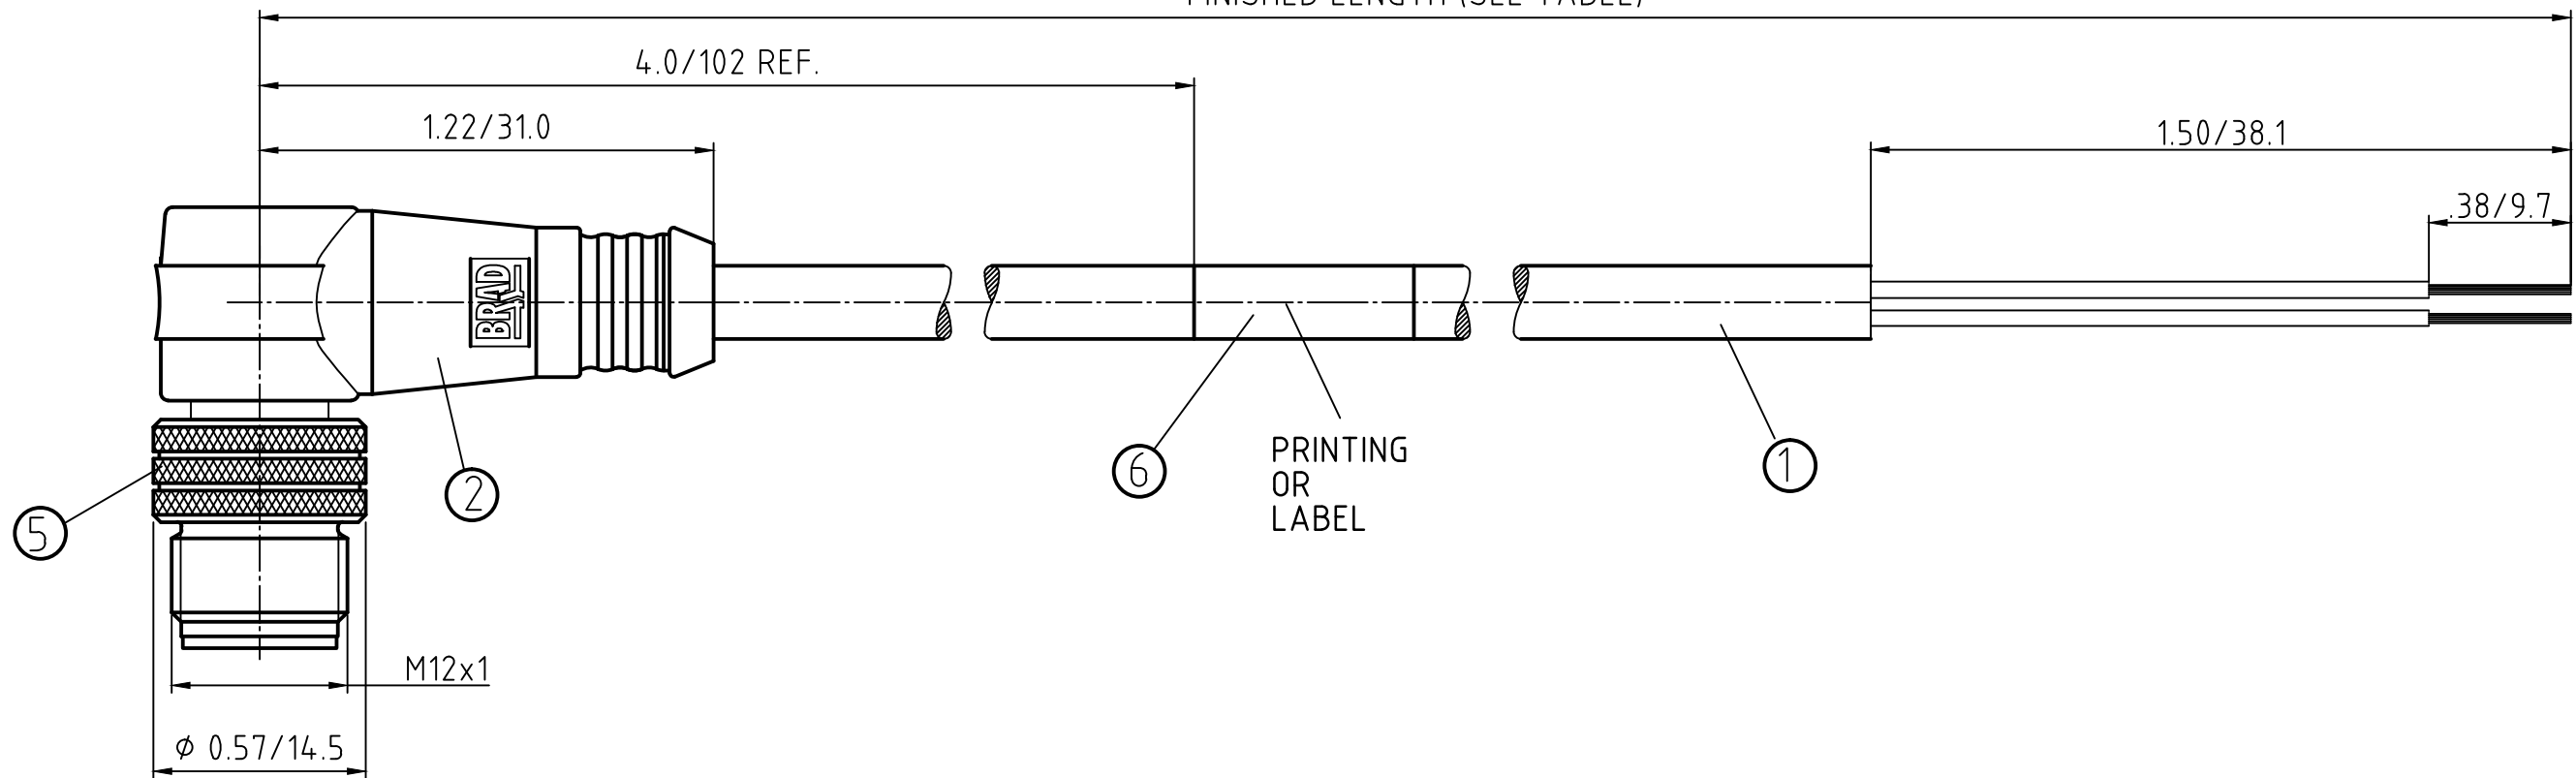

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

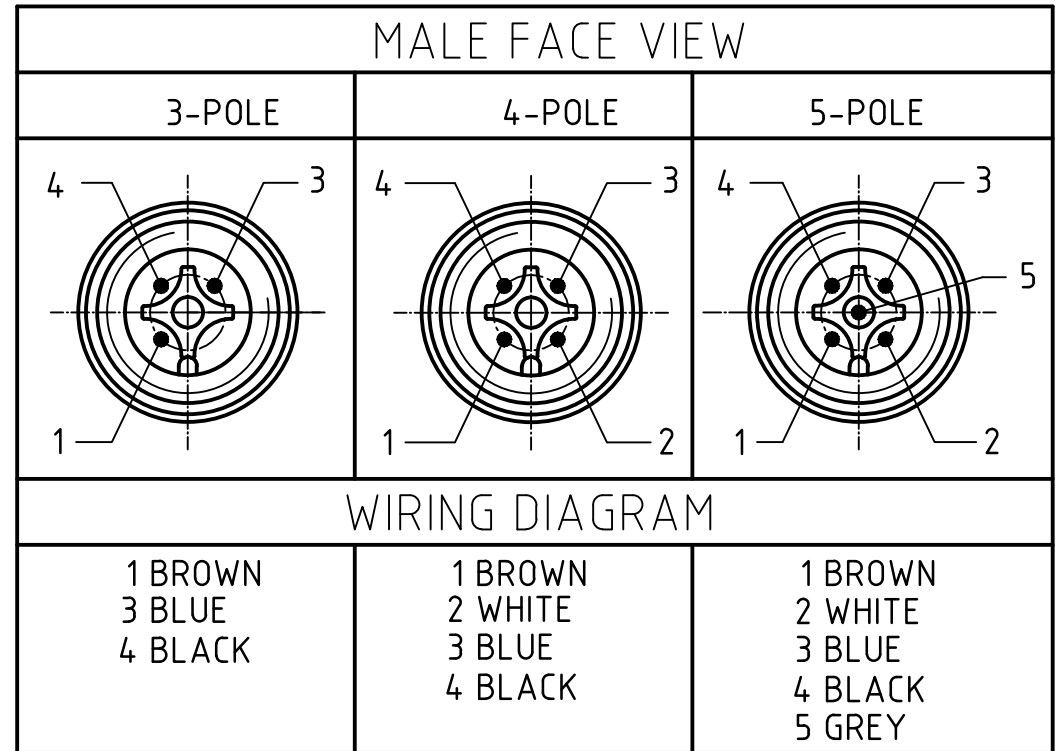

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

ADDED PART NUMBER EC NO: IPG2014-1140 DRWN: GGUSTAFS 2013/12/17 CHKD: BARDEN APPR: BWOODMAN 2010/01/25 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±.13 ±.010 1 PLACE ±.25 ±.020 ANGULAR ± --- °	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽ = 0 ◻ = 0		IN/MM	NTS	INCH	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY DATE CHECKED BY DATE RE 2010/01/14 APPROVED BY DATE NSTAUDIG 2010/01/25	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE			
		MATERIAL NO. SEE TABLE SHEET 2	MOLEX INCORPORATED DOCUMENT NO. SD-120065-029	SHEET NO. 1 OF 2		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651497	803007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
3	1200659208	803007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651662	804007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651665	804007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651666	804007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651668	804007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651669	804007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651724	805007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651726	805007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651727	805007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651728	805007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200652123	805007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

ADDED PART NUMBER EC NO.: IPG2014-1140 DRWN.: GGUSTAFS 2013/12/17 CHKD.: BARDEN APPR.: BWOODMAN 2010/01/25	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	$\nabla = 0$ $\sphericalangle = 0$	mm	INCH	IN/MM	NTS	INCH			
		4 PLACES ±---	±---		DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE		
		3 PLACES ±---	±.005		CHECKED BY	DATE			
		2 PLACES ±.13	±.010		RE	2010/01/14	MOLEX INCORPORATED SD-120065-029		
	1 PLACE ±.25	±.020		APPROVED BY	DATE				
	ANGULAR ± --- °			NSTAUDIG	2010/01/25	MATERIAL NO. SEE TABLE DOCUMENT NO. SHEET NO.			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				