

6

5



4

3

2

1

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
130010-0519	114020A01F030	3.00' +1.75' -0 [0.9M +44.5mm -0]
130010-0525	114020A01F060	6.00' +2.19' -0 [1.8M +55.6mm -0]
130010-0533	114020A01F120	12.00' +3.50' -0 [3.7M +88.9mm -0]
130010-0541	114020A01F200	20.00' +6.50' -0 [6.1M +165.1mm -0]

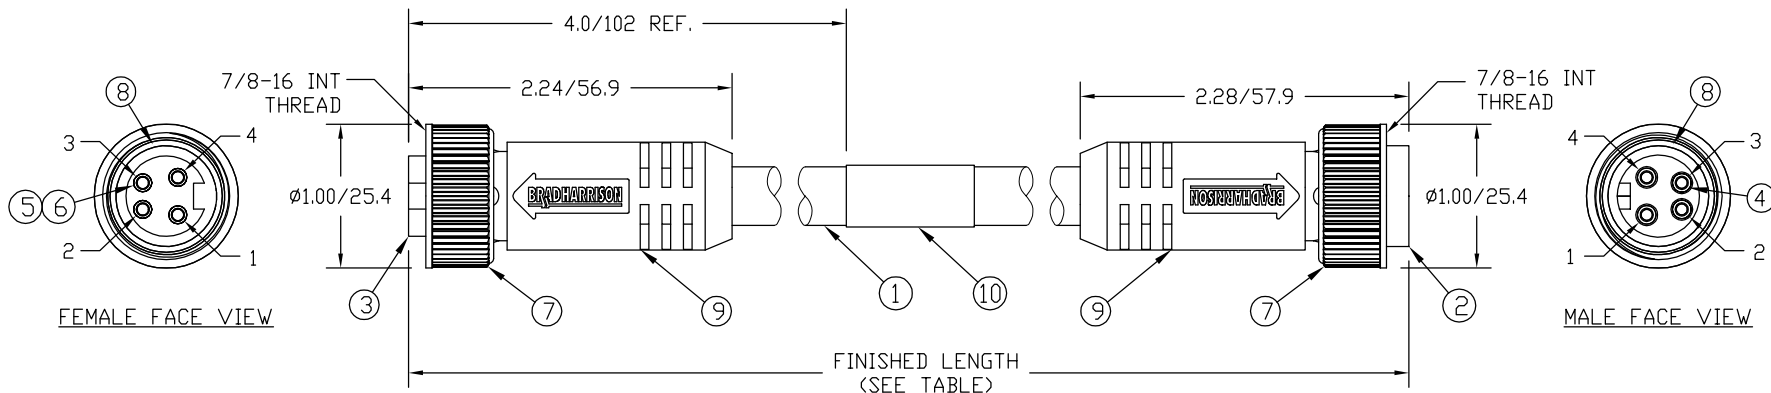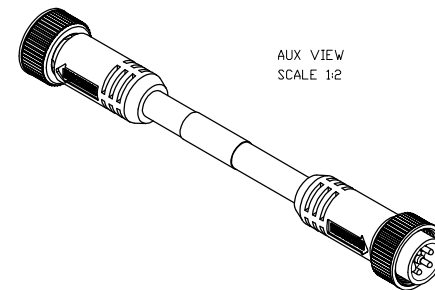

- NOTES:
- 1) MATERIALS: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) CABLE: #16/4 ST00W/ST PVC
 - 4) ELECTRICAL DATA:
MAX. VOLTAGE: 600 VAC/VDC
MAX. CURRENT 10 AMPS
 - 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 105°C
 - 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE.
 - 7) ASSEMBLY IS RoHS COMPLIANT.

S1	P1
1	1
2	2
3	3
4	4

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL	NYLAR	BLACK/YELLOW
9	2	OVERMOLD	PVC	YELLOW
8	2	FRICTION RING	NYLON	WHITE
7	2	COUPLING NUT	ZINC DIECAST	BLACK E-COAT
6	4	SOCKET SLEEVE	STAINLESS STEEL	
5	4	CONTACT SOCKET	BRASS	GOLD OVER NICKEL
4	4	CONTACT PIN	BRASS	GOLD OVER NICKEL
3	1	FEMALE INSERT, 4 POLE	PVC	YELLOW
2	1	MALE INSERT, 4 POLE	PVC	YELLOW
1	1	CABLE, ST00W/ST #16/4	PVC JACKET	YELLOW

RELEASED DRAWING EC NO: WNA2009-0846 DRWN: LHARTMAN 8/10/09 CHKD: BWOODMAN09/08/11 APPR: JFMURPHY 2009/08/14	QUALITY SYMBOLS $\nabla = 0$ $\nabla C = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES	mm	INCH	DRAWN BY	DATE	TITLE MINI-CHANGE CORDSET 4P MALE/FEMALE ST/ST #16/4 YELLOW ST00W/ST		
		3 PLACES	±----	±----	CHECKED BY	DATE	MOLEX INCORPORATED		
		2 PLACES	±----	±0.1	APPROVED BY	DATE	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-130010-005
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±----°		SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

6

5

4

3

2

1