

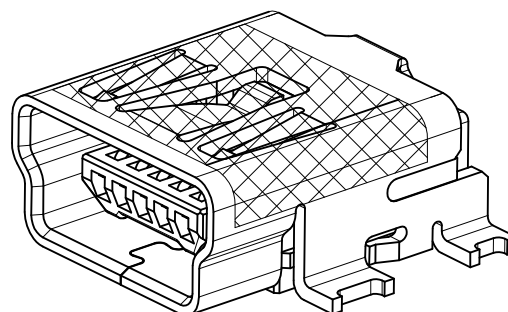
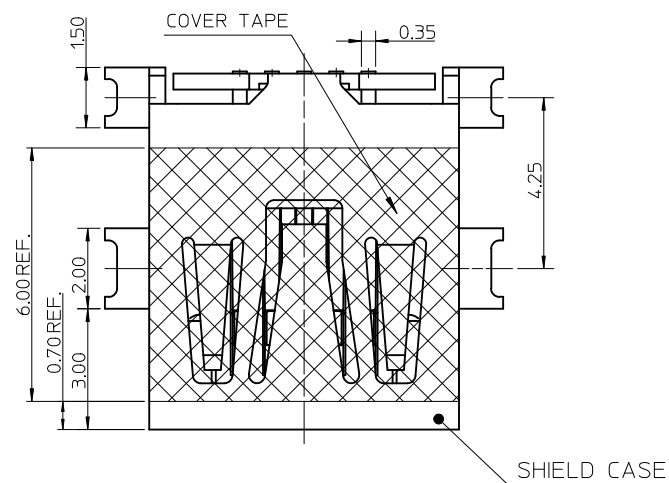


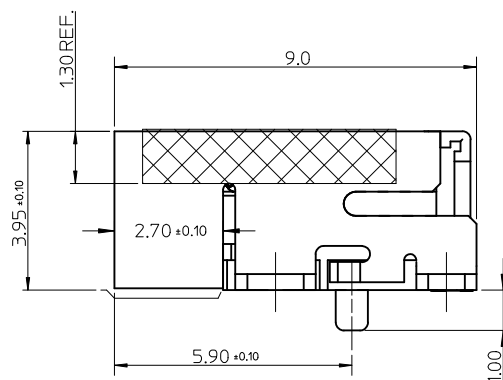


NOTE :


1. MATERIAL :
HOUSING : HIGH TEMPERATURE THERMAL PLASTIC ,
BLACK,UL94V-0
TERMINAL : COPPER ALLOY THICKNESS = 0.2 MM
SHIELD CASE : COPPER ALLOY THICKNESS = 0.4 MM
2. PLATING :
TERMINAL:
CONTACT AREA : GOLD 0.75 MICROMETER MINIMUM.
SOLDER TAIL AREA :PURE TIN 1~3 MICROMETER PLATING.
UNDER PLATING : NICKEL 1.25 MICROMETER MINIMUM.
SHIELD CASE :
PURE TIN 1~3 MICROMETER PLATING.
UNDER PLATING : NICKEL 1.0 MICROMETER MINIMUM.
3. TAIL & NAIL COPLANARITY 0.1 mm MAXIMUM.
4. PRODUCT SPECIFICATION REFER TO PS-67803-001.
5. PACKAGING INFORMATION REFER TO PK-67503-001.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV
DIRECTIVE 2000/53/EC.

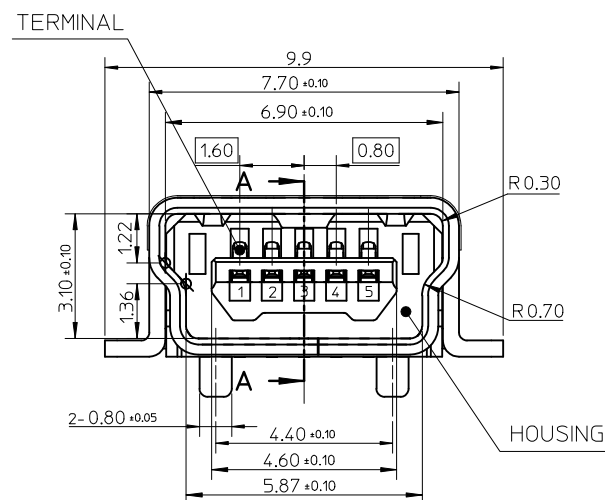

PRODUCT NO.	REMARK
67503-1020	N/A
67503-1120	HALOGEN FREE

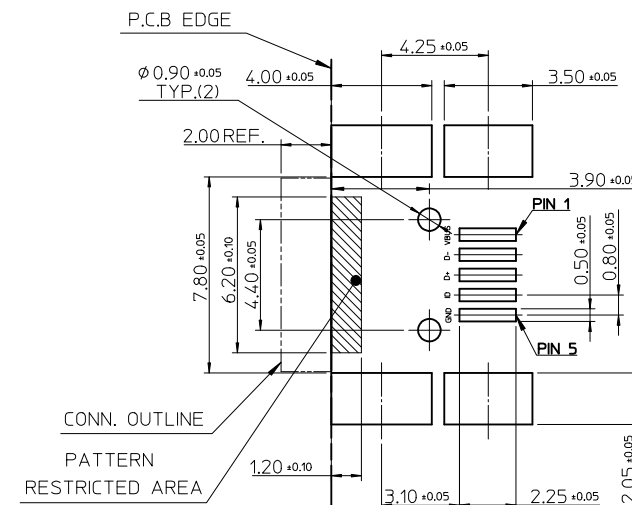

RECOMMENDED P.C.B. PATTERN LAYOUT

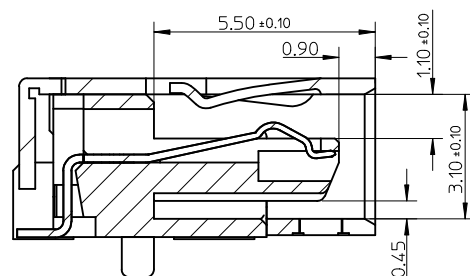

SECTION A-A

REMOVE PART NUMBER		EC NO: SH2012-0143		2011/11/16		2011/11/16		2011/11/21		DESCRIPTION		REV	
T1		DRWN:XQZHANG		CHKD:GLLI		APPR:XJSONG							