

10

9

8

7

6

5

4

3

2

1

F




E

D

C

B

A

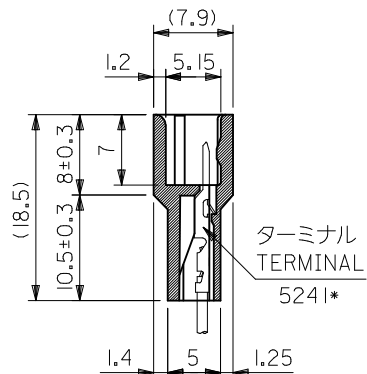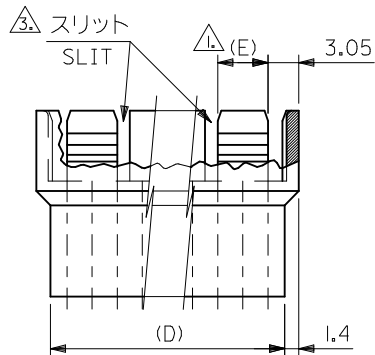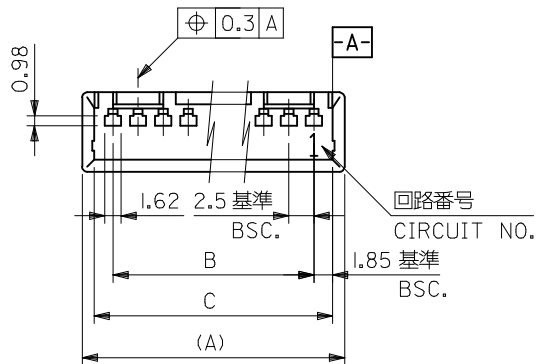

ナイロン66, 94V-0
NYLON66, 94V-0
色: オフホワイト
COLOR: OFF WHITE

注)
NOTE.

△ フリクションロック構成:
FRICTION LOCK CONFIGURATION:
4極までは1箇所
4CKT AND UNDER - 1LOCK
5極以上は2箇所
5CKT AND OVER - 2LOCKS

2. 嵌合相手: 5102-N
MATES WITH HOUSING: 5102-N

△ スリット構成:
SLIT CONFIGURATION:
4極以下はなし
4CKT AND UNDER - NO SLIT
5及び6極は1箇所
5 AND 6CKTS - 1 SLIT
7極以上は2箇所
7CKT AND OVER - 2 SLITS

29-11-0153	5240-151	35	38.7	41.1	5	38.3	15
-0143	-141	32.5	36.2	38.6	5	35.8	14
-0133	-131	30	33.7	36.1	5	33.3	13
-0123	-121	27.5	31.2	33.6	5	30.8	12
-0103	-101	22.5	26.2	28.6	5	25.8	10
-0093	-091	20	23.7	26.1	5	23.3	9
-0083	-081	17.5	21.2	23.6	5	20.8	8
-0073	-071	15	18.7	21.1	5	18.3	7
-0063	-061	12.5	16.2	18.6	5	15.8	6
-0053	-051	10	13.7	16.1	3.75	13.3	5
-0043	-041	7.5	11.2	13.6	7.5	10.8	4
-0033	-031	5	8.7	11.1	5	8.3	3
29-11-0023	5240-021	2.5	6.2	8.6	2.5	5.8	2
EDP.NO.	ENG.NO.	B	C	(A)	(E)	(D)	極数 CKT.

REVISED EC NO: J2016-0727 DRWN: SNAKAMURA08 2016/01/20 CHKD: KASAKAWA 2016/02/12 APPR: TANAKA 2016/02/26	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		0.25 UNDER	UNDER	±0.2		DRAWN BY KKOHAYA	DATE 2000/01/28	TITLE MINI. SPOX PLUG HSG			
		0.25 OVER	0.5 UNDER	±0.2		CHECKED BY	DATE				
		0.5 OVER	1.0 UNDER	±0.2		TYAMAGUCHI	2000/03/30				
		1.0 OVER	10 UNDER	±0.2		APPROVED BY		DATE	molex SD-5240-N1		
		10 OVER	30 UNDER	±0.25							
		30 OVER		±0.3							
		ANGULAR ± 3 °				MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
					SEE CHART		SD-5240-N1		1 OF 1		
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9

8

7

6

5

4

3

2

1