

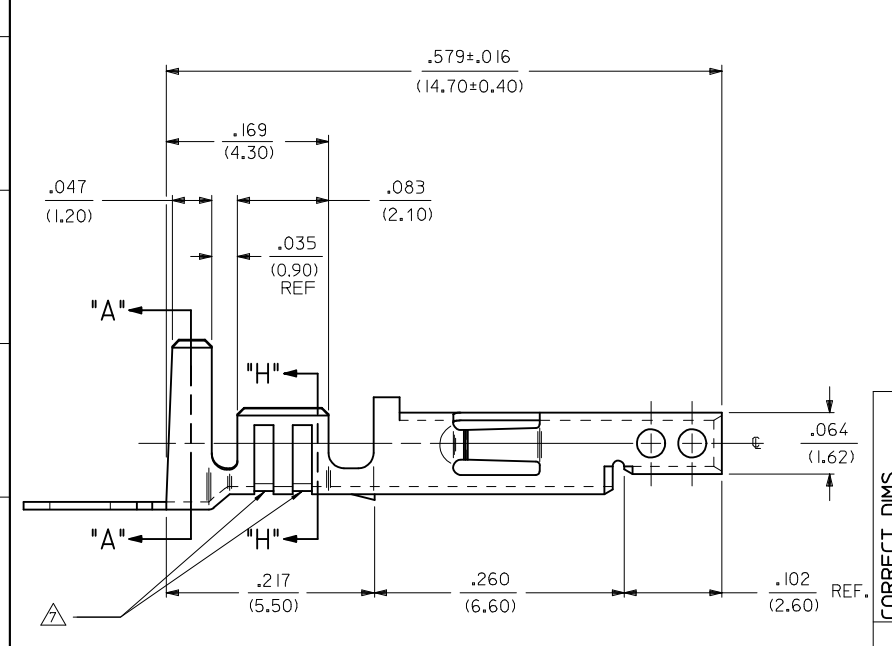


13	12	11	10	9	8	7	6	5	4	3	2	1
PART NO.	ENG. NO.	MAT'L.	PLATE	WIRE GAGE	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "G"	LEGEND:	
39-00-0207	5556-SP	A	A	18-24 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.30±0.40)	.020 (0.50)		
39-00-0208	5556-SPL			22-28 GA.	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)	5556 - ** S * P *	
39-00-0209	5556-S2P											
39-00-0210	5556-S2PL			16 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.30)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)		
39-00-0211	5556-S3P											
39-00-0212	5556-S3PL	B	A	18-24 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.30±0.40)	.020 (0.50)	BASE NO. _____ MATERIAL _____ BLANK= BRASS PB= PHOS. BRONZE S= TIN OVER NICKEL PLATING & CRIMP SIZE COMB. _____ BLANK THRU 5 CHAIN OR LOOSE _____ BLANK= CHAIN L= LOOSE	
39-00-0213	5556-PBSP			22-28 GA.	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)		
39-00-0214	5556-PBSPL											
39-00-0215	5556-PBS2P											
39-00-0216	5556-PBS2PL											
39-00-0217	5556-PBS3P											
39-00-0218	5556-PBS3PL			16 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.30)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)		

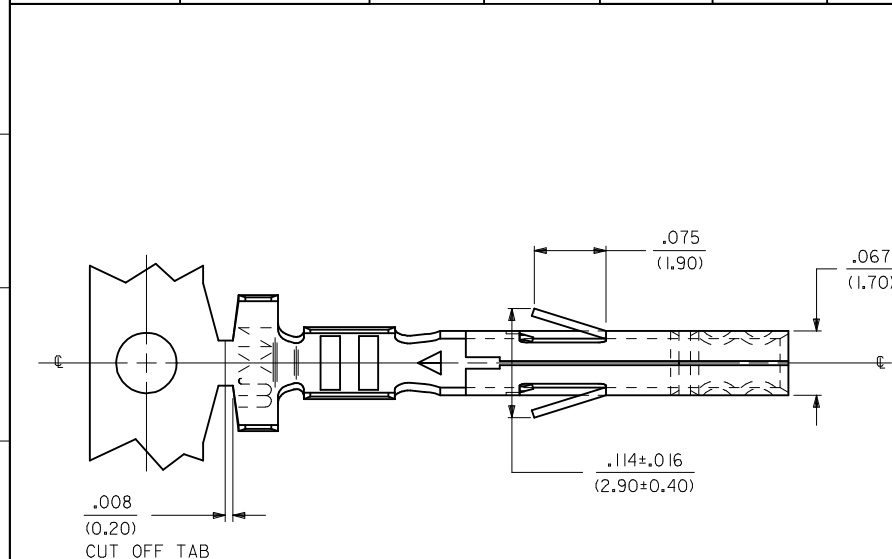


NOTES


- MATERIAL:
A= BRASS
B= PHOS. BRONZE
- FINISH:
A= .000100/((.00254) MIN BRIGHT TIN OVER .000050/((.00127)MIN. NICKEL
- PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003.
- PACKAGING SPECIFICATION: PK-5556-001 FOR CHAIN TERMINALS
PK-5556-003 FOR LOOSE TERMINALS.
- MATES WITH: 5558, 5566, 5569, 30069, 30070, 42440, 42404, 43879, 43810, 44068.
- APPLICABLE HOUSINGS: 5557, 30067, 43760, 44516, OR 42474.
- THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.
- WHEN TERMINALS ARE INSTALLED IN THE HOUSING THE WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
- THIS TERMINAL IS DESIGNED FOR SINGLE WIRE CRIMPING.
- PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.



SECT. "H-H"



SECT. "A-A"



CORRECT DIMS		EC NO: UCP2013-4634 2013/04/24 DRW:NGUYEN CHKD:JBELL 2013/04/24 APPR:FSMITH		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	TITLE	DOCUMENT NO.	SHEET NO.
								IN/MM		10:1	INCH				
F2		REV			▽=0 ▽=0 ▽=0	mm INCH		DRAWN BY DATE		MINI FIT JR OVERALL BRIGHT TIN OVER NICKEL FEMALE CRIMP TERMINAL molex SD-5556-SP* 1 OF 1					
						4 PLACES ± --- ± ---		GEP 5/17/1990							
						3 PLACES ± --- ± .010		CHECKED BY DATE							
						2 PLACES ± 0.25 ± .014		RJF 5/17/1990							
						1 PLACE ± 0.36 ± ---		APPROVED BY DATE							
F2		REV			▽=0	0 PLACE ± ±		RAS 5/17/1990		SEE CHART					
						ANGULAR ±1/2°		MATERIAL NO.							
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							