

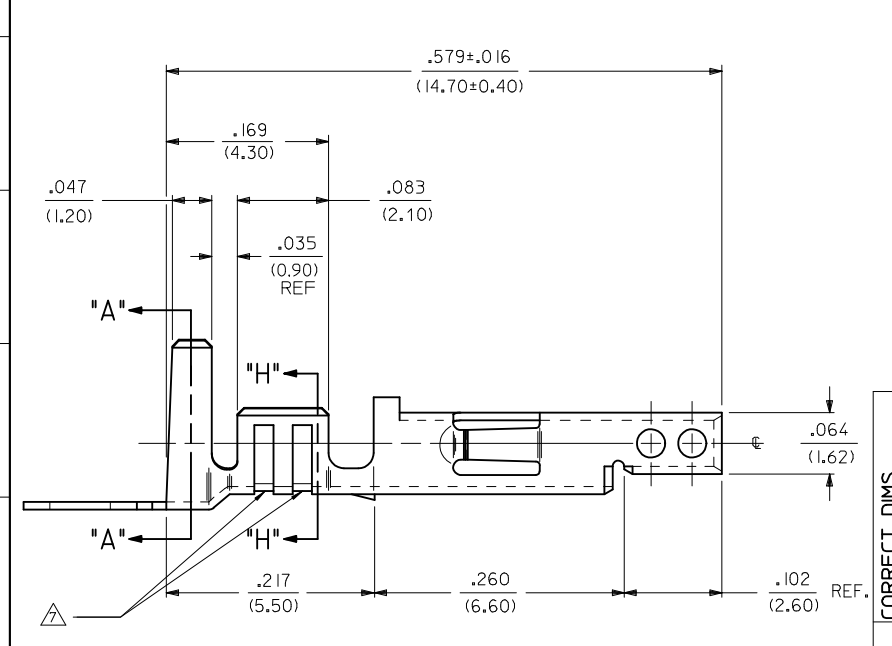


13	12	11	10	9	8	7	6	5	4	3	2	1
PART NO.	ENG. NO.	MAT'L.	PLATE	WIRE GAGE	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "G"	LEGEND:	
39-00-0207	5556-SP	A	A	18-24 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.30±0.40)	.020 (0.50)		
39-00-0208	5556-SPL			22-28 GA.	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)	5556 - ** S * P *	
39-00-0209	5556-S2P											
39-00-0210	5556-S2PL			16 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.30)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)		
39-00-0211	5556-S3P											
39-00-0212	5556-S3PL	B	A	18-24 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.30±0.40)	.020 (0.50)	BASE NO. _____ MATERIAL _____ BLANK= BRASS PB= PHOS. BRONZE S= TIN OVER NICKEL PLATING & CRIMP SIZE COMB. _____ BLANK THRU 5 CHAIN OR LOOSE _____ BLANK= CHAIN L= LOOSE	
39-00-0213	5556-PBSP			22-28 GA.	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)		
39-00-0214	5556-PBSPL											
39-00-0215	5556-PBS2P			16 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.30)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)		
39-00-0216	5556-PBS2PL											
39-00-0217	5556-PBS3P			16 GA.	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.30)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)		
39-00-0218	5556-PBS3PL											

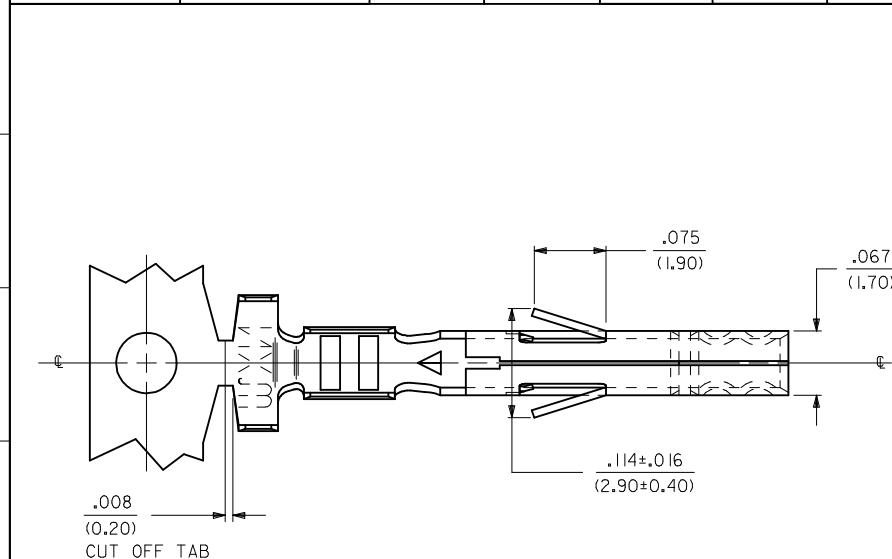

- NOTES
- MATERIAL:
A= BRASS
B= PHOS. BRONZE
 - FINISH:
A= .000100/((.00254) MIN BRIGHT TIN OVER .000050/((.00127)MIN. NICKEL
 - PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003.
 - PACKAGING SPECIFICATION: PK-5556-001 FOR CHAIN TERMINALS
PK-5556-003 FOR LOOSE TERMINALS.
 - MATES WITH: 5558, 5566, 5569, 30069, 30070, 42440, 42404, 43879, 43810, 44068.
 - APPLICABLE HOUSINGS: 5557, 30067, 43760, 44516, OR 42474.
 - THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.
 - WHEN TERMINALS ARE INSTALLED IN THE HOUSING THE WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
 - THIS TERMINAL IS DESIGNED FOR SINGLE WIRE CRIMPING.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

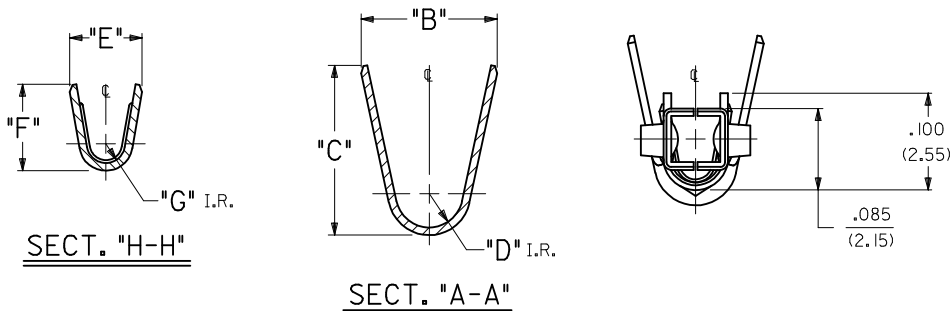

CORRECT DIMS EC NO: UCP2013-4634 2013/04/24 DRAWN: NGUYEN 2013/04/24 CHKD: JBEL 2013/04/26 APPR: FSM TH		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY	DATE	TITLE				
F2		REV	 =0	4 PLACES	± ---	± ---	GEP	5/17/1990	MINI FIT JR OVERALL BRIGHT TIN OVER NICKEL FEMALE CRIMP TERMINAL			
			 =0	3 PLACES	± ---	± .010	CHECKED BY	DATE				
			 =0	2 PLACES	± 0.25	± .014	RJF	5/17/1990				
			1 PLACE		± 0.36	± ---	APPROVED BY		DATE	molex		
			0 PLACE		±		RAS		5/17/1990			
						ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE		SEE CHART		SD-5556-SP*		1 OF 1			
			MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					