


7. PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003

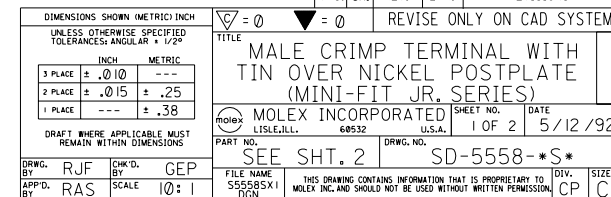

	13	12	11	10	9	8	7	6	5558		4	3	2	1	
	PART NO.	ENG. NO.	FORM	MAT'L	WIRE GAGE	RANGE OF INSULATION DIA.	QUANTITY PER REEL (FORMED)	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"		
J	39-00-0120	5558-S	CHAIN	A	18-24 GA.	.051-.122 (1.30-3.10)	4,000	.075 (1.90)	.091 (2.30)	.020 (.50)	.142 (3.60)	.177 (4.50)	.035 (.90)		
	39-00-0121	5558-SL	LOOSE		22-28 GA.	.035-.071 (.90-1.80)	6,000	.071 (1.80)	.065 (1.65)	.016 (.40)	.091 (2.30)	.091 (2.30)	.024 (.60)		
	39-00-0122	5558-S2	CHAIN												
	39-00-0123	5558-S2L	LOOSE												
	39-00-0124	5558-S3	CHAIN		16 GA.	.122 (3.10) MAX.	4,000	.091 (2.30)	.106 (2.70)	.024 (.60)	.142 (3.60)	.177 (4.50)	.035 (.90)		
I	39-00-0125	5558-S3L	LOOSE												
	NOT TOOLED	5558-S4	CHAIN												
	NOT TOOLED	5558-S4L	LOOSE		14 GA.	.122 (3.10) MAX.	4,000	.091 (2.30)	.114 (2.90)	.024 (.60)	.142 (3.60)	.177 (4.50)	.035 (.90)		
	39-00-0259	5558-S5	CHAIN												
	39-00-0260	5558-S5L	LOOSE												
	39-00-0126	5558-PBS	CHAIN	B	18-24 GA.	.051-.122 (1.30-3.10)	4,000	.075 (1.90)	.091 (2.30)	.020 (.50)	.142 (3.60)	.177 (4.50)	.035 (.90)		
	39-00-0127	5558-PBSL	LOOSE		22-28 GA.	.035-.071 (.90-1.80)	6,000	.071 (1.80)	.065 (1.65)	.016 (.40)	.091 (2.30)	.091 (2.30)	.024 (.60)		
H	39-00-0128	5558-PBS2	CHAIN												
	39-00-0129	5558-PBS2L	LOOSE												
	39-00-0130	5558-PBS3	CHAIN		16 GA.	.122 (3.10) MAX.	4,000	.091 (2.30)	.106 (2.70)	.024 (.60)	.142 (3.60)	.177 (4.50)	.035 (.90)		
	39-00-0131	5558-PBS3L	LOOSE												
	NOT TOOLED	5558-PBS4	CHAIN												
	NOT TOOLED	5558-PBS4L	LOOSE		14 GA.	.122 (3.10) MAX.	4,000	.091 (2.30)	.114 (2.90)	.024 (.60)	.142 (3.60)	.177 (4.50)	.035 (.90)		
G	39-00-0263	5558-PBS5	CHAIN												
	39-00-0264	5558-PBS5L	LOOSE												
F															
E															
D															
C															
B															
A															

LEGEND:

5558-***S**

BASE NO. _____
MATERIAL _____
BLANK= BRASS
PB= PHOS. BRONZE
S= TIN OVER NICKEL _____
CRIMP SIZE _____
BLANK = 18-24 AWG
2 = 22-28 AWG
3 = 16 AWG
4 = 14 AWG
5 = 28-30 AWG
CHAIN OR LOOSE _____
BLANK= CHAIN
L= LOOSE

DIMENSIONS SHOWN (METRIC) INCH		MFG. SH. REV. LTR.		REVISE ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▼ = 0			
INCH METRIC		TITLE		MALE CRIMP TERMINAL WITH TIN OVER NICKEL POSTPLATE (MINI-FIT JR. SERIES)	
3 PLACE ± --- ---		MOX MOLEX INCORPORATED		SHEET NO. 2 DATE 5/12/92	
2 PLACE ± --- ± ---		L15LEJLL 60932 U.S.A.			
1 PLACE --- ± ---		PART NO.		SD-5558--*S*	
DRAWING: R J F		CHKD: G E P		REV. CP C	
APP'D: RAS		SCALE: --:--		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	