


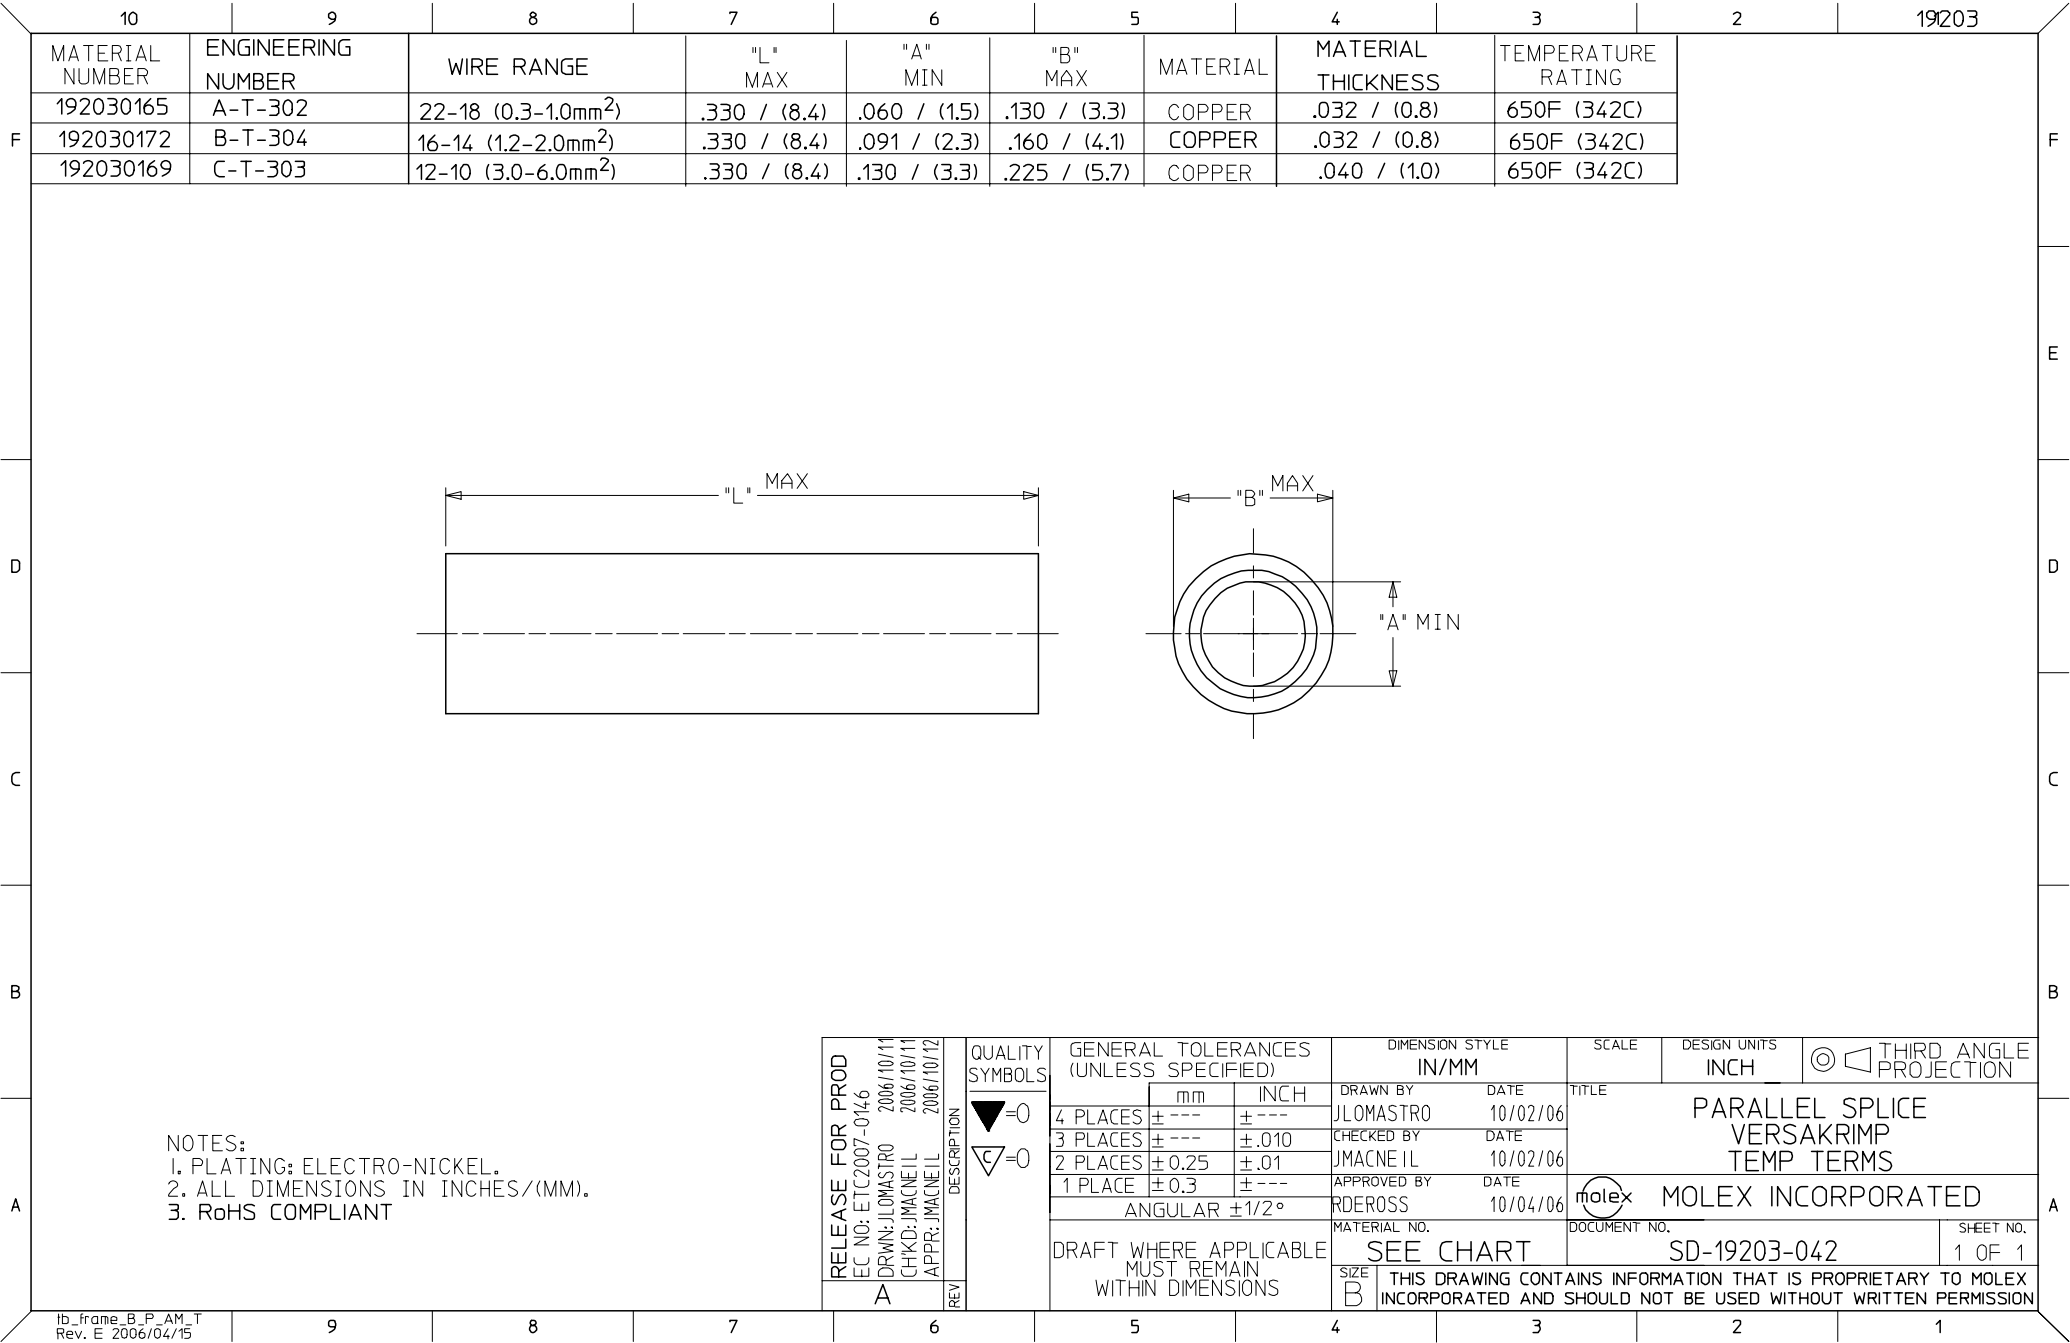

10	9	8	7	6	5	4	3	2	1
MATERIAL NUMBER	ENGINEERING NUMBER	WIRE RANGE	"L" MAX	"A" MIN	"B" MAX	MATERIAL	MATERIAL THICKNESS	TEMPERATURE RATING	
192030165	A-T-302	22-18 (0.3-1.0mm ²)	.330 / (8.4)	.060 / (1.5)	.130 / (3.3)	COPPER	.032 / (0.8)	650F (342C)	
192030172	B-T-304	16-14 (1.2-2.0mm ²)	.330 / (8.4)	.091 / (2.3)	.160 / (4.1)	COPPER	.032 / (0.8)	650F (342C)	
192030169	C-T-303	12-10 (3.0-6.0mm ²)	.330 / (8.4)	.130 / (3.3)	.225 / (5.7)	COPPER	.040 / (1.0)	650F (342C)	

NOTES:
1. PLATING: ELECTRO-NICKEL.
2. ALL DIMENSIONS IN INCHES/(MM).
3. RoHS COMPLIANT

RELEASE FOR PROD EC NO: ETC2007-0146 DRWN: JLOMASTRO 2006/10/11 CHKD: JMACNEIL 2006/10/11 APPR: JMACNEIL 2006/10/12	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY JLOMASTRO	DATE 10/02/06	PARALLEL SPLICE VERSAKRIMP TEMP TERMS MOLEX INCORPORATED		
			4 PLACES	± ---	± ---	CHECKED BY JMACNEIL	DATE 10/02/06			
			3 PLACES	± ---	± .010					
			2 PLACES	± 0.25	± .01					
			1 PLACE	± 0.3	± ---	APPROVED BY RDEROSS	DATE 10/04/06			
A	REV		ANGULAR ±1/2°		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-19203-042		SHEET NO. 1 OF 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				