

6

5

4



3

2



1

NOTES:



- HOUSING MAT'L: LCP, GLASS FILLED, UL 94V-0, COLOR: BLACK
CONTACT MAT'L: COPPER ALLOY
- FINISH: SELECT GOLD - 30 MI MIN
SELECT TIN - 150 MI MIN
BOTH OVER NICKEL - 50 MI MIN
GOLD TO BE SPECIFIED THK IN THIS AREA
- PRODUCT SPECIFICATION: PS-45424-001
- PACKAGING SPECIFICATION: PK-45484-001
- THIS MODULE INTERLOCKS WITH ALL STANDARD MOLEX POWER DOCK MODULES.
- DATUM -A- IS THE CONNECTOR MOUNTING SURFACE.
- THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2000/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD PLATING.
- PCB HOLE SIZE: SEE PS-45424-001.

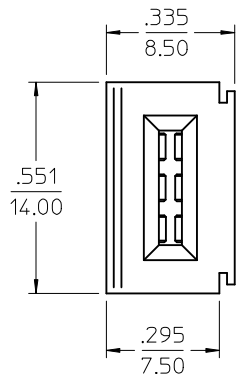

.118
3.00
TYP

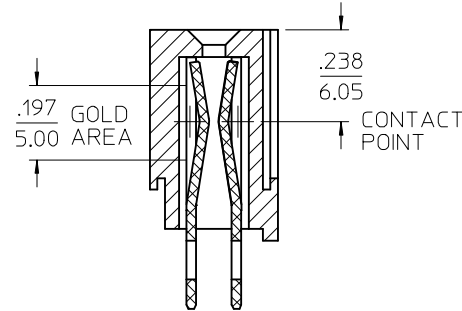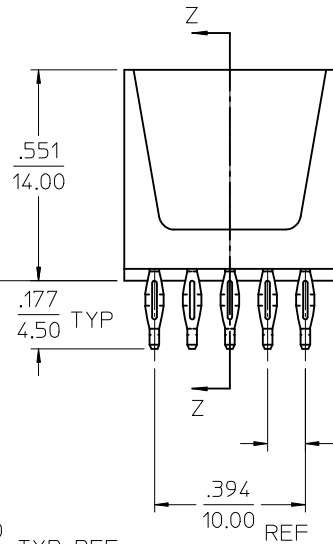

SECTION Z-Z

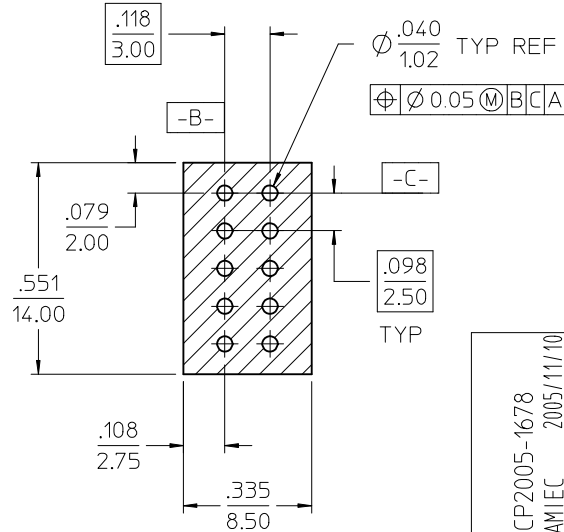

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: 2.36 MIN

EC NO: UCP2005-1678	2005/11/10	DESCRIPTION
DRWN: KSAMIEC	2005/11/10	
CHKD: APATEL	2005/11/10	
APPR: APATEL	2005/11/10	
B	REV	

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0004
3 PLACES	± .008	± .0006
2 PLACES	± .015	± .0012
1 PLACE	± .025	± .0020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY	DATE
SCHAFFER	2005/2/8
CHECKED BY	DATE
SAMIEC	2005/2/9
APPROVED BY	DATE
MARGULIS	2005/2/10
MATERIAL NO.	45520-0001

SCALE
2:1DESIGN UNITS
METRICTHIRD ANGLE
PROJECTION

TITLE
POWER DOCK MODULE
POWER PLUG 250V
VERT STD CPI

MOLEX INCORPORATED

DOCUMENT NO. SD-45520-001 SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

5

4

3

2

1