


PART NUMBER DATA							
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm		B IN mm	
2	391002102	M800-02-02-5	WHITE	.67	17.0	.394	10.00
3	391002103	M800-02-03-5	WHITE	1.06	27.0	.787	20.00
4	391002104	M800-02-04-5	WHITE	1.46	37.0	1.181	30.00
5	391002105	M800-02-05-5	WHITE	1.85	47.0	1.575	40.00
6	391002106	M800-02-06-5	WHITE	2.24	57.0	1.969	50.00
7	391002107	M800-02-07-5	WHITE	2.64	67.0	2.362	60.00
8	391002108	M800-02-08-5	WHITE	3.03	77.0	2.756	70.00
9	391002109	M800-02-09-5	WHITE	3.43	87.0	3.150	80.00
10	391002110	M800-02-10-5	WHITE	3.82	97.0	3.543	90.00
11	391002111	M800-02-11-5	WHITE	4.21	107.0	3.937	100.00
12	391002112	M800-02-12-5	WHITE	4.61	117.0	4.331	110.00

REF. LAST 2 DIGITS OF PART NUMBER EQUAL CIRCUIT COUNT

NOTE: IF THIS PRODUCT IS STORED IN AN ENVIRONMENT WITH A RELATIVE HUMIDITY OF LESS THAN 50%, MOISTURE MUST BE ADDED. REFER TO TECHNICAL ADVISORY AS 45499-001 FOR INSTRUCTIONS.

ENGINEERING NUMBER LEGEND

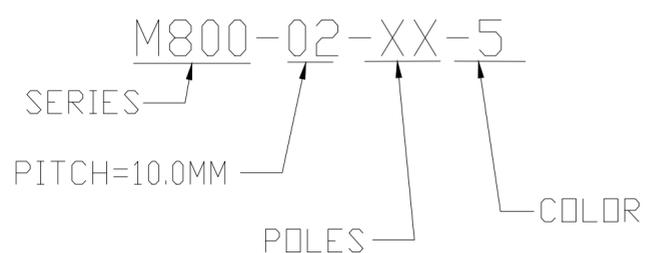


CONTACT FACTORY FOR OPTIONAL COLORS

SPECIFICATIONS:

- Material:
 - (A) Screw: Steel, Zinc plated
 - (B) Body: PA66 UL94 V-0
 - (C) Cage: Brass, Nickel plated
 - (D) Terminal: Stainless Steel
- Rating: 300V, 30amps
- Wire range: 18-10 AWG
- Max torque: 7.0 in lbs.
- Dielectric voltage withstand: DC 3000V for 1 minute.
- Insulation resistance: DC 1000V, 100G Ω
- Rated Impulse Voltage: 4000V, Plus and Minus 5 times each
- Strip Length: .24 in. (6.0mm)
- Operating Temperature: -40° C to +105° C
- Contact Resistance: < 3 m Ω
- All dims. shown are for reference only

Ø.138
3.50

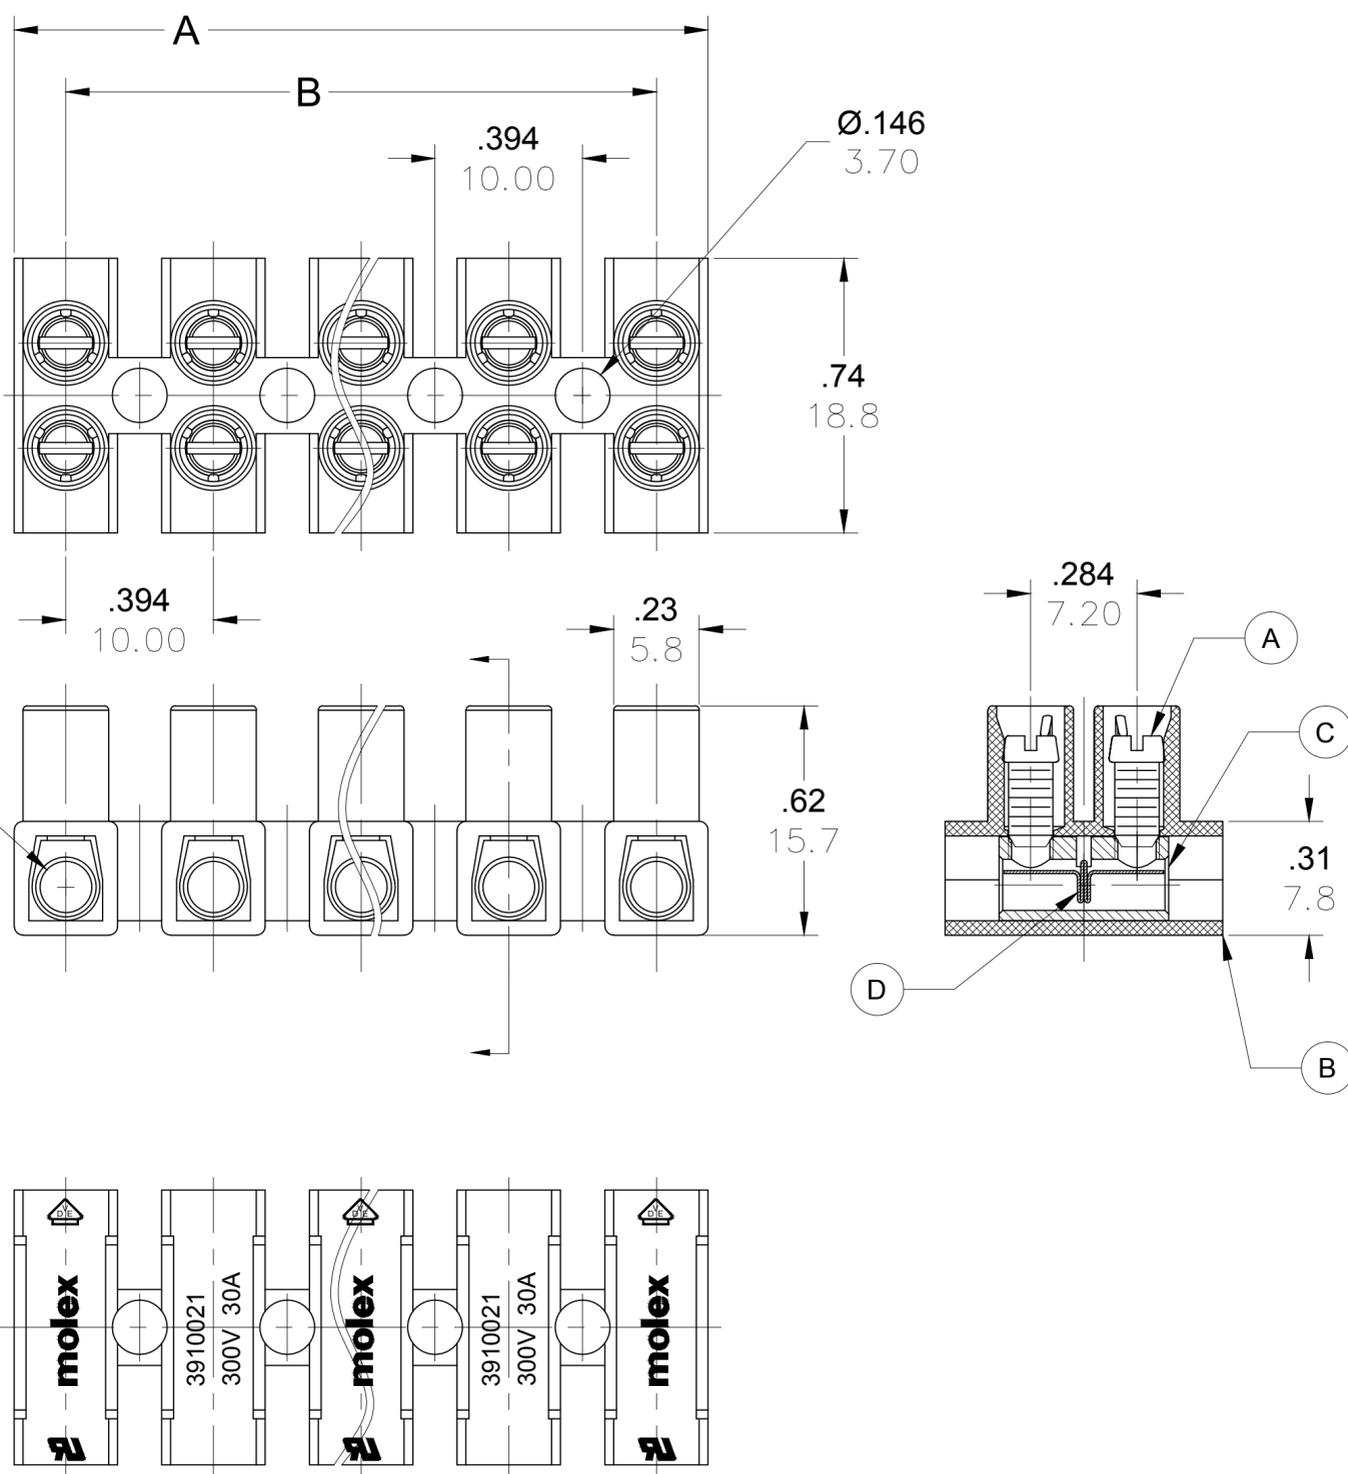

ADDED MOISTURE NOTE EC NO.: IFC2016-1226 DRWN: RSTONE 3/7/16 CH'KD: MZIELINS 2016/03/10 APPR: KJOZWIK 2014/07/21	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>3 PLACES</td><td>±---</td><td>±.005</td></tr> <tr><td>2 PLACES</td><td>±0.13</td><td>±.01</td></tr> <tr><td>1 PLACE</td><td>±0.3</td><td>±---</td></tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±0.13	±.01	1 PLACE	±0.3	±---	DIMENSION STYLE IN/MM	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	±---	±---																		
	3 PLACES	±---	±.005																		
2 PLACES	±0.13	±.01																			
1 PLACE	±0.3	±---																			
DRAWN BY RSTONE	DATE 2014/07/10	TITLE TERMINAL STRIP 10MM LOW PROFILE 300V																			
CHECKED BY G FARNSW	DATE ---	MOLEX INCORPORATED																			
APPROVED BY JFMURPHY	DATE 2014/07/21	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-39100-014	SHEET NO. 1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																